
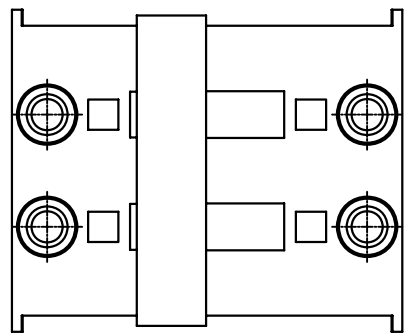

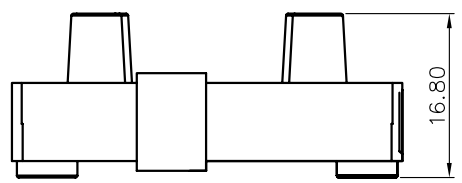


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

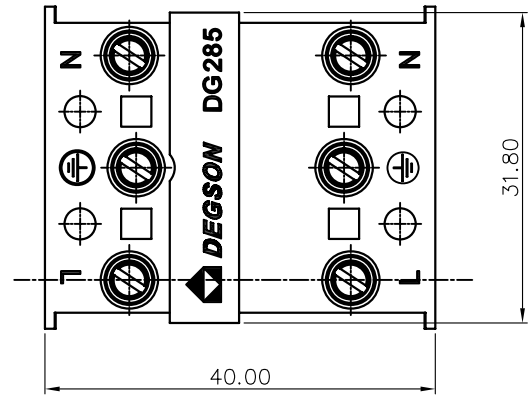

NOTES1:
 UL Standard
 1.Rated Voltage/Current : 300V / 16A
 2.Torque Value : M3 , 4.43Lb.in
 3.Wire Range : 18~12AWG
 IEC Standard
 1.Rated Voltage/Current : 400V / 24A
 2.Torque Value : M3 , 0.5N·m
 3.Wire Range : 2.5mm²

NOTES2:
 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 11.50mm, Poles : N=03P
 3.Stripping length : 7mm
 4.Withstanding Voltage : AC2500V/1Min.
 5.Operating temperature: -40°C~+105°C
 6.Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm				Tolerances										
To	Over	To	Over	To	Over	0.1/10	∠									
6	10	6	10	30	60	100	150	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

7.RoHS Compliance

DG285 - 03P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)
 (RoHS)
 00A-(Standard)

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DG285-03P-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.: DG285-C01		REV	D0
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET	1/1
		MM (INCH)	SCALE	1:1	