

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- Rated voltage/current : 300V / 10A
- Withstanding voltage : AC1600V/1Min.
- Wire range : 28~12AWG

IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(kV)	6.0kV	6.0kV	6.0kV
Rate voltage(V)	1000V	630V	400V
Rate current(A)		21 A	

2. Wire range : 0.2~2.5mm²






NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 7.50mm, Poles : N=06~XXP
- Stripping length : 5~6mm
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:


Pitch Range	In mm	Normal Dimension	Range	mm
Over	6	Over	30	Over
TO	10	TO	60	TO
TO	10	TO	100	TO
TO	10	TO	150	TO
TO	24	TO	60	TO
TO	10	TO	100	TO
TO	10	TO	150	TO

±0.15|±0.20|±0.30|±0.50|±0.70|±1.00|±1.30 | ±2'

6. RoHS Compliance

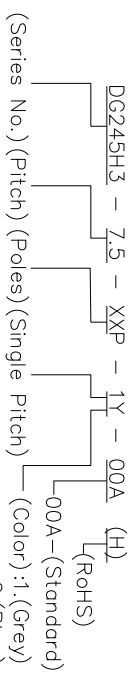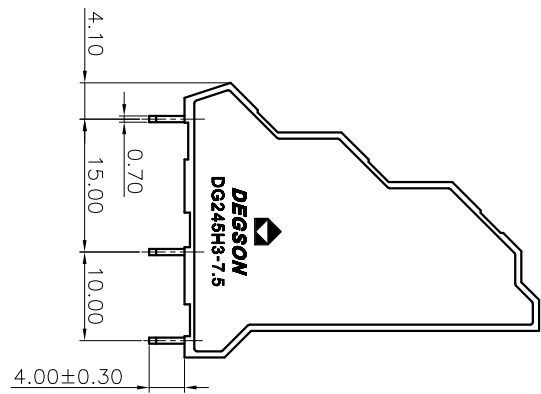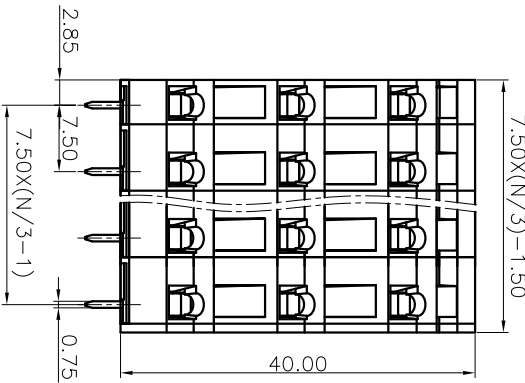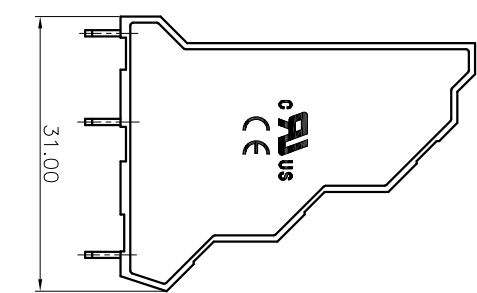

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

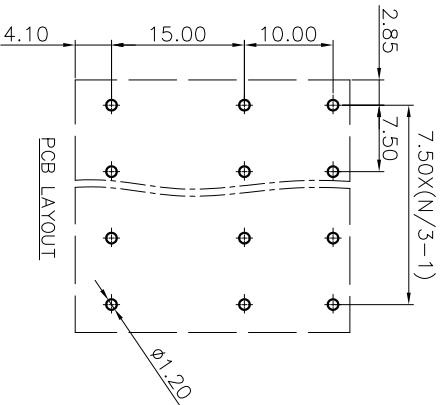

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1

A 8 7 6 5 4 3 2 1