
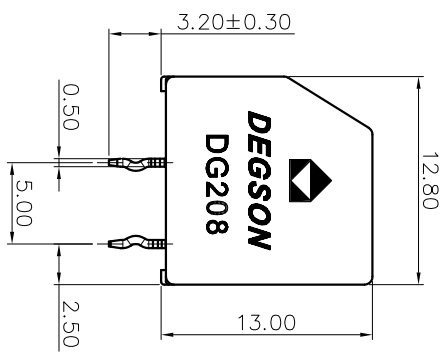
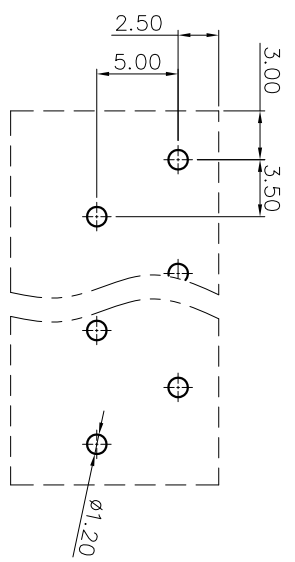
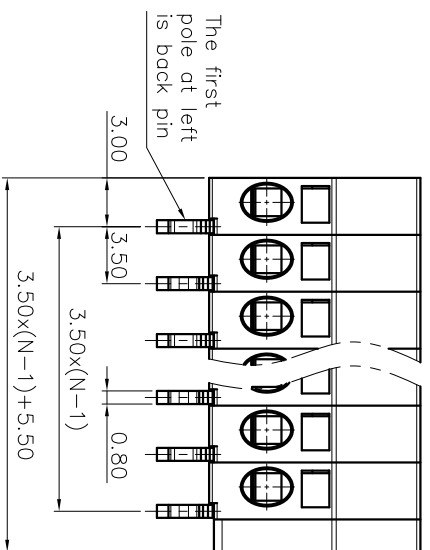


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

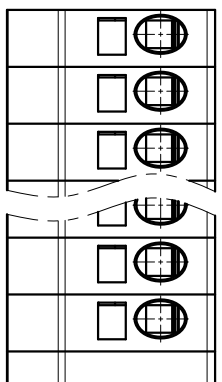

Pitch range in mm	Over	Nominal dimension	Over	Over	Over	Over				
TO	6	TO	30	TO	60	TO	100	TO	150	±2
6	10	24	30	60	100	150	±2			

7. RoHS Compliance

- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 7A
2. Wire range : 20~16AWG
IEC Standard
1. Rated voltage/current : 450V / 9A
2. Wire range : 0.2~0.75mm²
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=01~XXP
3. Stripping length : 7~8mm
4. Withstanding voltage : AC2500V/1Min
5. Operating temperature: -40°C~+105°C
6. Undimensioned tolerances:

DG208 - 3.5 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
REV	DO
SHEET	1/1
SCALE	1:1

A 8 7 6 5 4 3 2 1