
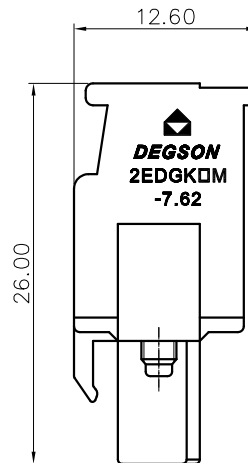
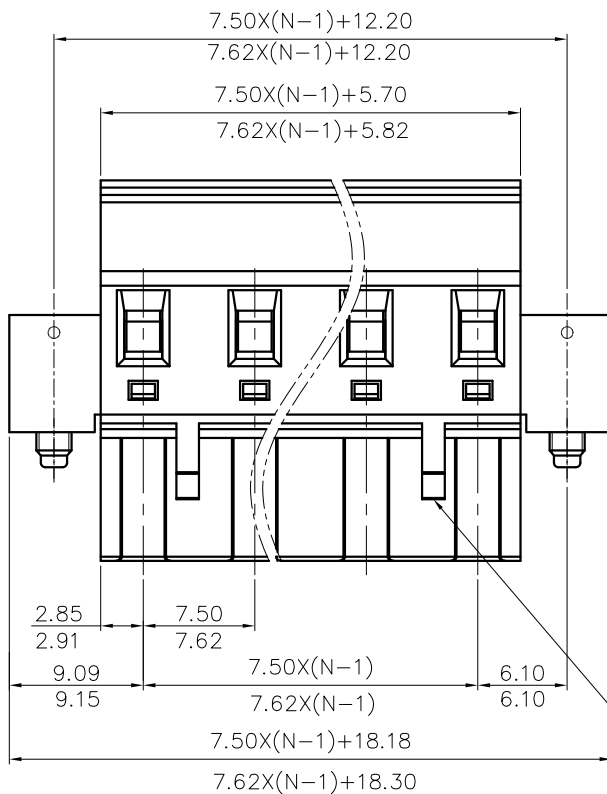
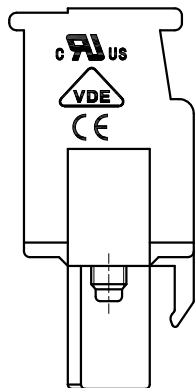


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

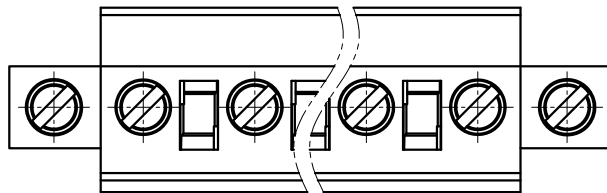

02P: Clasp on the right from this view

NOTES1:

- UL Standard  
 1. Rated voltage/current : 300V / 15A  
 2. Withstanding voltage : AC1600V/1Min.  
 3. Torque value : M2.5 , 3.54Lb.in  
 4. Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	10A

2. Torque value : M2.5 , 0.4N·m  
 3. Wire range : 2.5mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 7.50/7.62mm, Poles : N=02~12P  
 3. Stripping length : 7~8mm  
 4. Operating temperature: -40°C~+105°C  
 5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						0.1/10
To	Over	To	Over	To	Over	To	Over	≤
6	10	10	24	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6. RoHS Compliance

2EDGKAM - 7.5/7.62 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (RoHS)  
 00A-(Standard)  
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)  
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/	NAME: 2EDGKAM-7.5/7.62-XXP-1Y-00A(H)			
	CHKD:	/				
	DRFT:	/	TITLE: CUSTOMER DRAWING		REV	DO
THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET 1/1		
		MM (INCH)		DO NOT SCALE DRAWING	SCALE 1:1	