
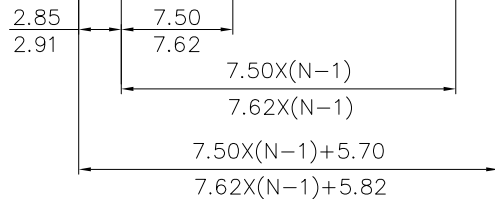
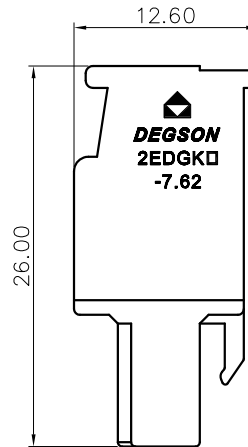
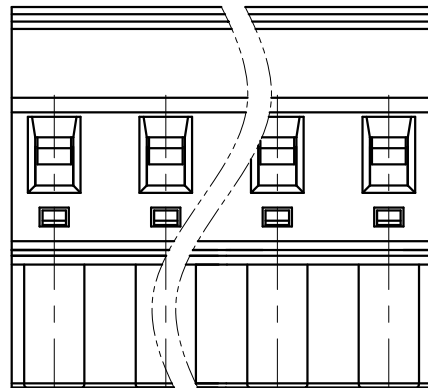
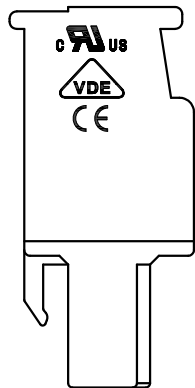


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

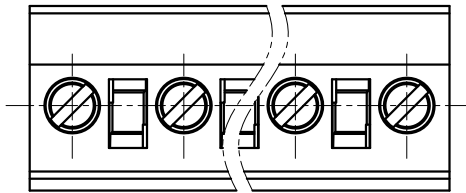

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 15A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M2.5 , 3.54Lb.in
4. Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	10A


2. Torque value : M2.5 , 0.4N·m
3. Wire range : 2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.50/7.62mm, Poles : N=02~12P
3. Stripping length : 7~8mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				-	∩	∇
TO	Over	Over	TO	Over	Over	Over	0.1/10	
6	10	10	30	30	60	100	<	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6. RoHS Compliance

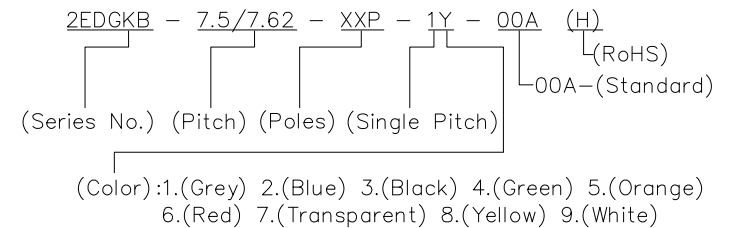

O2P: Clasp on the left from this view

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION		MM (INCH)		DO NOT SCALE DRAWING
NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司		NAME: 2EDGKB-7.5/7.62-XXP-1Y-00A(H)			
TITLE: CUSTOMER DRAWING		REV	DO		
DRAWING NO.:		/		SHEET 1/1	
SCALE		1:1			