

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- 1. UL Standard
- 1. Rated Voltage/Current : 300V / 10A
- 2. Withstanding Voltage : AC1600V/1Min.
- 3. Wire Range : 26~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	320V
Rate Current(A)	20A




2. Wire Range : 1.0~2.5mm<sup>2</sup>

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.00/5.08mm, Poles : N=02-22P /02-16P
- 3. Stripping length : 9~10mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range		mm
	Over	Under	
TO	6	10	0.1/0
TO	10	24	<
TO	30	60	±2
TO	60	100	±2
TO	100	150	±2
F0.15	F0.20	F0.30	F0.50
F0.70	F1.00	F1.30	±2

6. RoHS Compliance

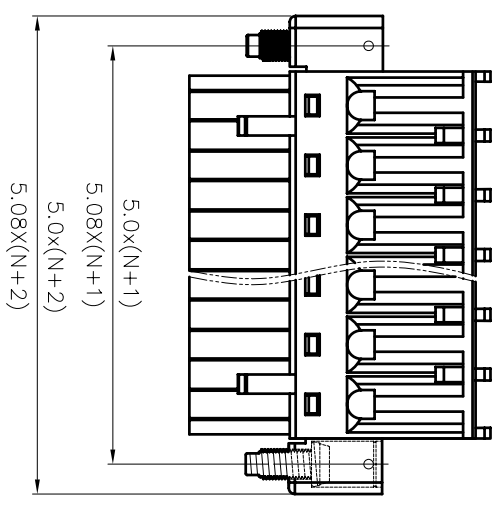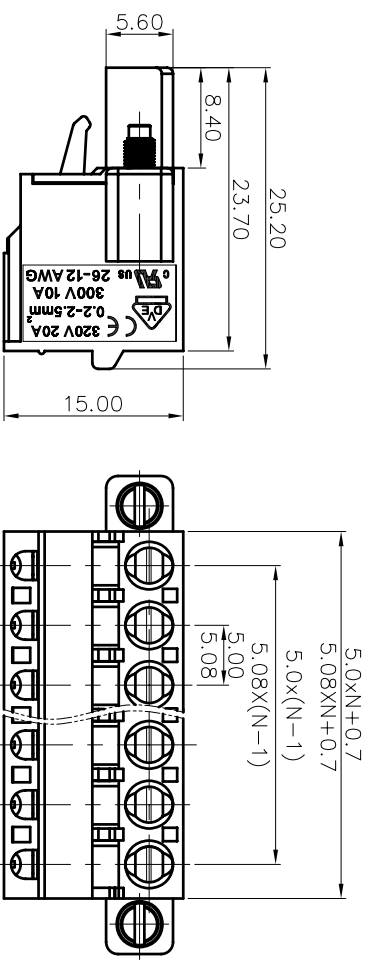

2EDGKDWMM - 5.0/5.08 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

- 00A-(Standard)
- (RoHS)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	APPD:	NINGBO 高松电子有限公司
CHKD:	/	NAME:	2EDGKDWMM-5.0/5.08-XXP-1Y-00A(H)
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1