

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 35A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Wire range : 24~8AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(kV)	6KV	8KV	8KV
Rate voltage(V)	1000V	1000V	1000V
Rate current(A)	41A		







2. Wire range : 0.2~10mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 7.62mm, Poles : N=01~xxP
- 3. Stripping length : 14~15mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	in mm	tolerance
Over	10	Over	60	Over	0.1/10
TO	10	TO	100	TO	<
6	10	TO	24	TO	150
		60	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
		±1.00	±1.00	±1.30	±1.30
					±2.

6. RoHS Compliance

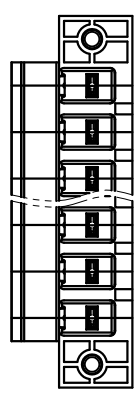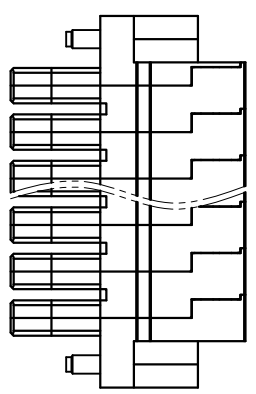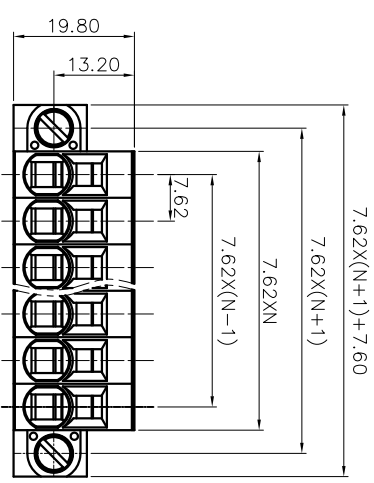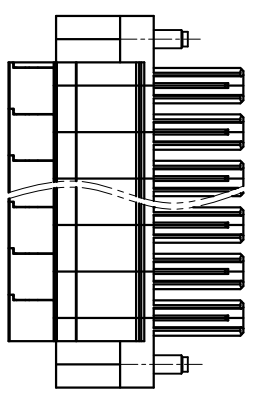

SEDGKDM - Z.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A 8 7 6 5 4 3 2 1