
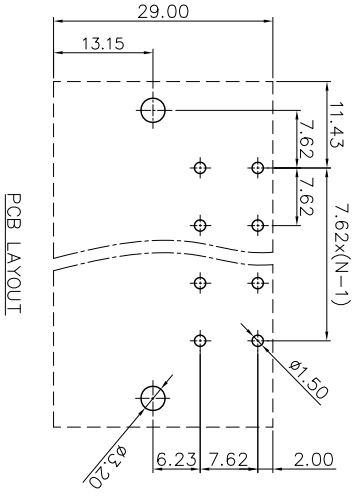

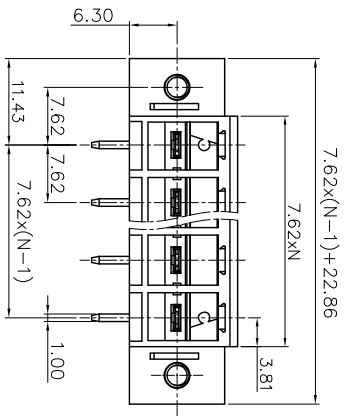



REVISION RECORD			
REV	ECN	DESCRIPTION	DATE
2			

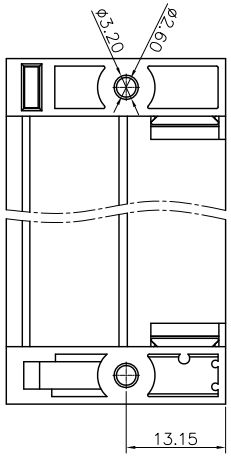

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	32A

- NOTES1:
 UL Standard
 1. Rated voltage/current : 300V / 30A
 2. Withstanding voltage : AC1600V/1Min.
 IEC Standard
 1. Pollution Degree 2

- NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 7.62mm, Poles : N=02~12P
 3. Operating temperature: -40°C~+105°C
 4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		mm	Inch	mm	Inch
	Lower	Upper				
6	10	30	0.1	1/10		
10	10	60	100	150		
10	24	30	60	100	150	
10.15	10.20	10.30	10.40	10.50	10.70	11.00
					1.100	1.130
						±2°

5. RoHS Compliance

SEDGRM - Z62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) 1: (Grey)
 (RoHS)
 00A - (Standard)

1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DFTI:	/
THIRD ANGLE PROJECTION	
NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD