
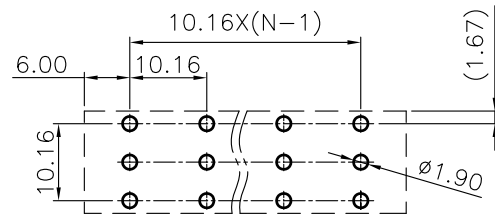
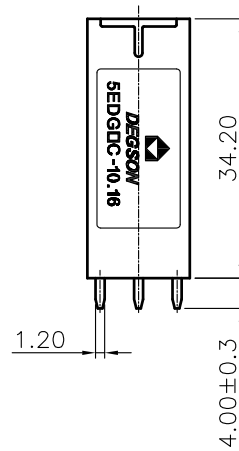
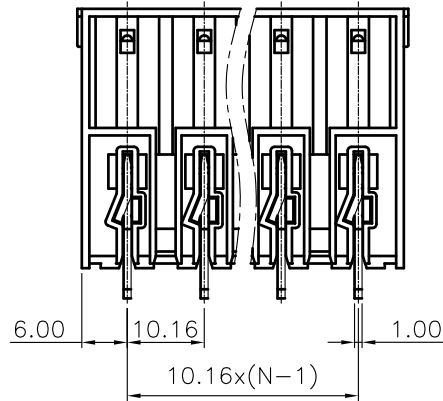
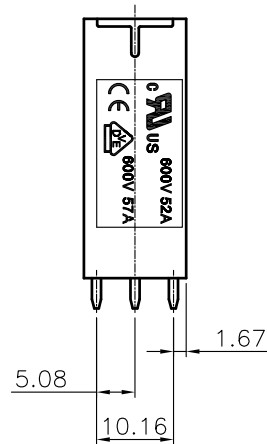


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

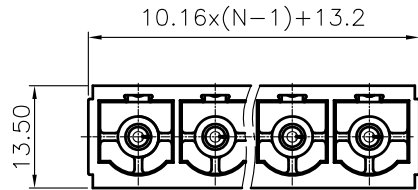

PCB LAYOUT

NOTES1:

UL Standard

1. Rated voltage/current : 600V / 52A
2. Withstanding voltage : AC2200V/1Min.

IEC Standard

1. Pollution Degree	3
Overtoltage Category	III
Rate Impulse Voltage(KV)	6.0KV
Rate Voltage(V)	600V
Rate Current(A)	57A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.16mm, Poles : N=02~08P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				□	∩	∇
TO	Over TO	TO	Over TO	Over TO	Over TO	0.1/10		
6	10	10	30	60	100	∩		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	∇		
					±1.00	±2'		

5. RoHS Compliance

5EDGVC - 10.16 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color):

(RoHS)
00A-(Standard)

1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION		DRAWING NO.:		/
		MM (INCH)		DO NOT SCALE DRAWING	
		TITLE: CUSTOMER DRAWING		REV	DO
				SHEET	1/1
				SCALE	1:1