

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 15A

2. Withstanding voltage : AC1600V/1Min.

3. Wire range : 22~14AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A

2. Wire range : 0.2~2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009

2. Pitch : 7.5/7.62mm, Poles : N=02~12P





3. Stripping length : 8~9mm

4. Operating temperature: -40°C~+105°C



5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Over		Over	
mm	mm	mm	mm	mm	mm	mm	mm
TO	TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150	150
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2

6. RoHS Compliance

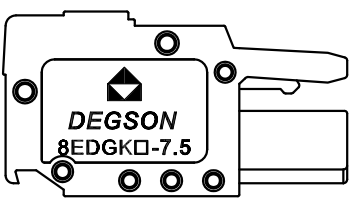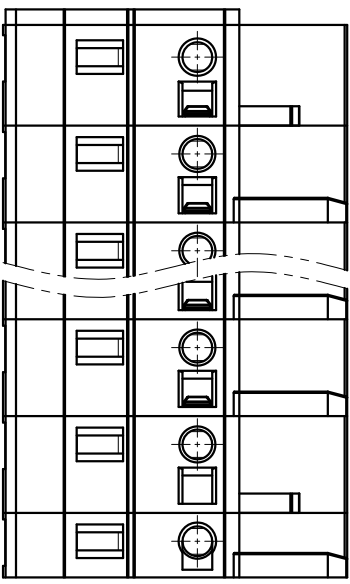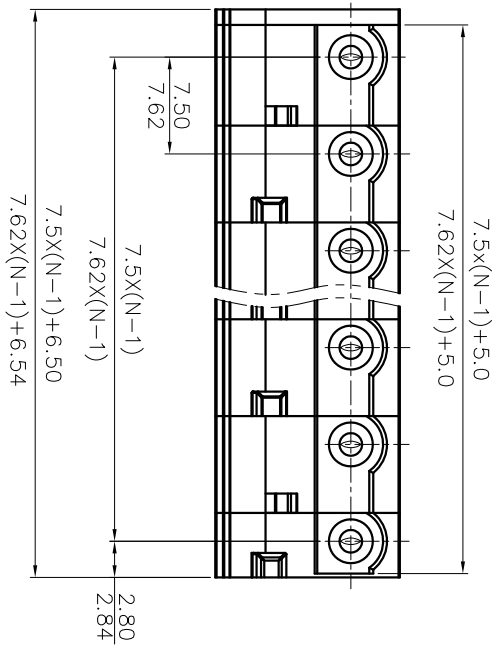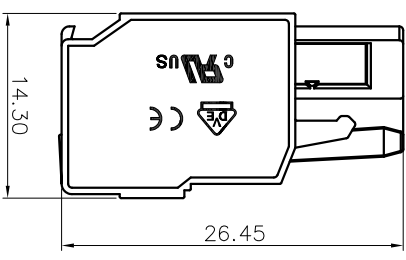

8EDGK - 7.5/7.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

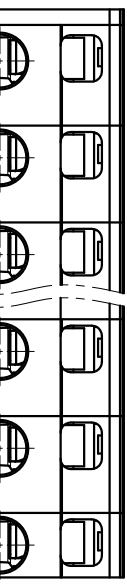

A 8 7 6 5 4 3 2 1

B

C

D

E

F

G

H

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSO 宁波高松电子有限公司 NINGBO DEGSO ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
SCALE	1:1

A