


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

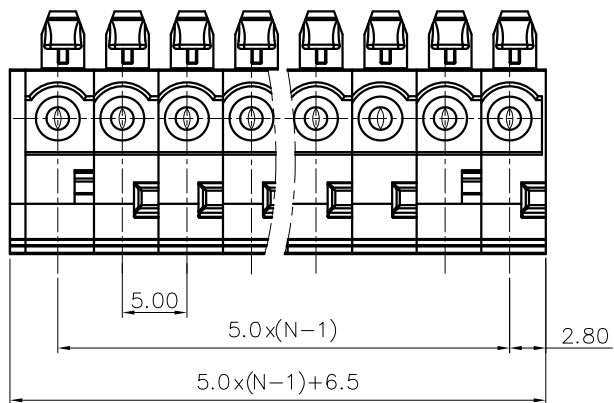

8EDGKC - 5.0 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

NOTES1:  
 UL Standard  
 1.Rated voltage/current : 300V / 15A  
 2.Withstanding voltage : AC1600V/1Min.  
 3.Wire range : 22~14AWG






IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2.Wire range : 0.2~2.5mm<sup>2</sup>  
 NOTES2:  
 1.Dimension shall be interpreted per ASME Y14.5-2009  
 2.Pitch : 5.0mm, Poles : N=02~24P  
 3.Stripping length : 8~9mm  
 4.Operating temperature: -40°C~+105°C  
 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					-	∩	∇
TO	Over	TO	Over	TO	Over	TO	Over	TO	
6	10	6	30	60	100	150	0.1/10		
6	24	30	60	100	150		<		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

6.RoHS Compliance

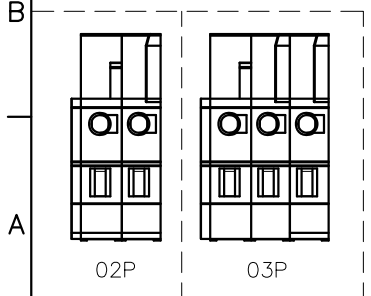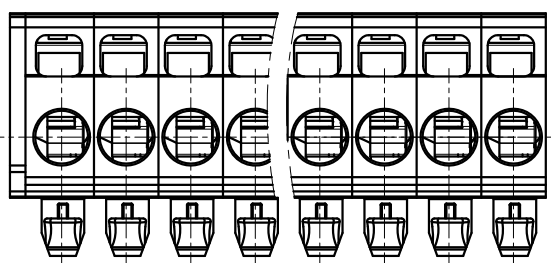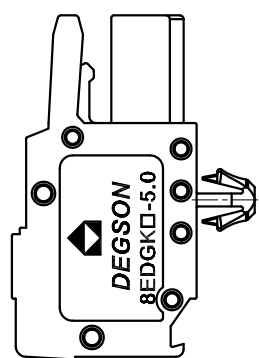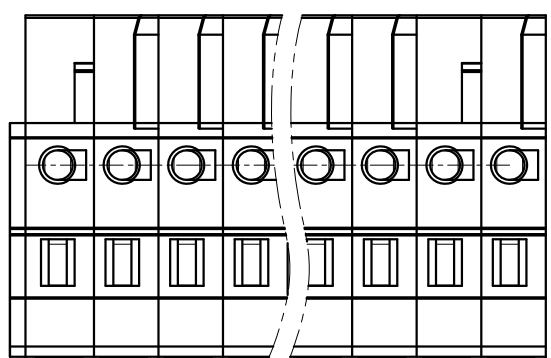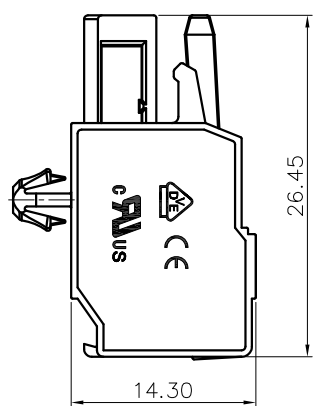

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	 THIRD ANGLE PROJECTION		NAME: 8EDGKC-5.0-XXP-1Y-00A(H)		
DRAWING NO.:		/		REV	DO
MM (INCH)		DO NOT SCALE DRAWING		SHEET	1/1
		SCALE		1:1	