
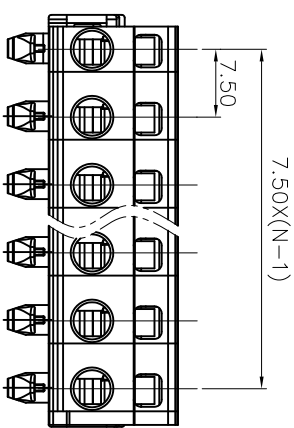
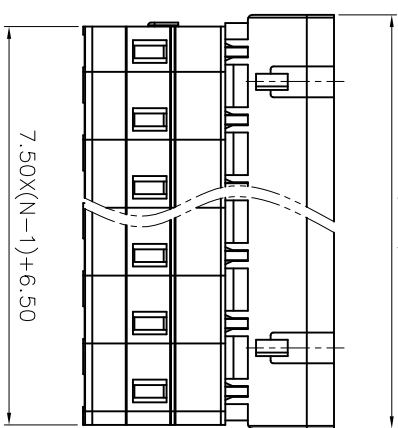



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

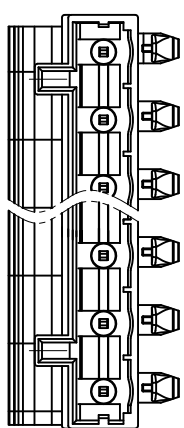

- NOTES1:
- 1. UL Standard
 - 2. Rated Voltage/Current : 300V / 15A
 - 3. Withstanding Voltage : AC1600V/1Min.
 - 4. Wire Range : 22~14AWG
- IEC Standard
1. Pollution Degree 3
 2. Overvoltage Category III
 3. Rate Impulse Voltage(KV) 4.0KV
 4. Rate Voltage(V) 400V
 5. Rate Current(A) 20A
2. Wire Range : 0.2~2.5mm²

- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 7.5mm, Poles : N=02~12P
 3. Stripping length : 9~10mm
 4. Operating temperature : -40°C~+105°C
 5. Undimensioned Tolerances:

Pitch Range	In mm		Nominal Dimension Range		mm	In mm	mm	In mm
	Over	TO	Over	TO				
6	10	TO	30	60	0.1/10			
10	TO	TO	60	100				
15	TO	24	60	100				
20	TO	30	60	100				
25	TO	30	60	100				
30	TO	30	60	100				
35	TO	30	60	100				
40	TO	30	60	100				
45	TO	30	60	100				
50	TO	30	60	100				
55	TO	30	60	100				
60	TO	30	60	100				
65	TO	30	60	100				
70	TO	30	60	100				
75	TO	30	60	100				
80	TO	30	60	100				
85	TO	30	60	100				
90	TO	30	60	100				
95	TO	30	60	100				
100	TO	30	60	100				
105	TO	30	60	100				
110	TO	30	60	100				
115	TO	30	60	100				
120	TO	30	60	100				

6. RoHS Compliance

8EDGKRD - Z.5 - XXP - 1Y - 00A (H)
 (Series No.)(Pitch) (Poles) (Single Pitch) (Color) :1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1