

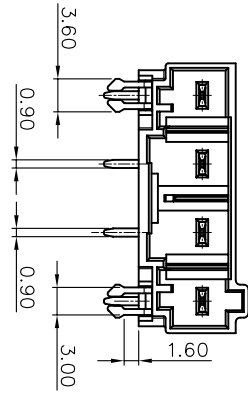



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



IEC Standard

Pollution degree	3	3	2
Overvoltage category	I	I	III
Rate impulse voltage(KV)	8KV	8KV	8KV
Rate voltage(V)	800V	800V	1000V
Rate current(A)	20A	20A	20A



- NOTES1:
- UL Standard
 - Rated voltage/current : 600V / 16A
 - Withstanding voltage : AC2200V/1Min.
- IEC Standard
- Pollution degree

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 7.50mm, Poles : 04P
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch range in mm	Nominal dimension range			mm	mm
	Over	Over	Over		
6 TO 10	10	30	60	100	0.1/10
10 TO 24	24	60	100	150	<
±0.15/±0.20/±0.30/±0.30/±0.50/±0.50/±0.70/±1.00/±1.30 ±Z					

5.RoHS Compliance

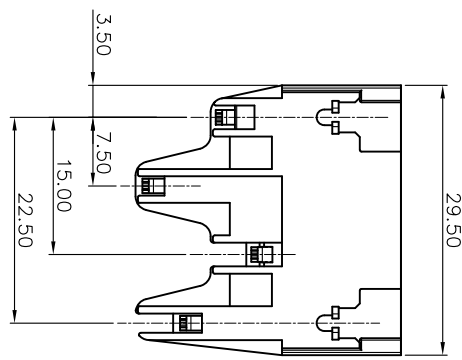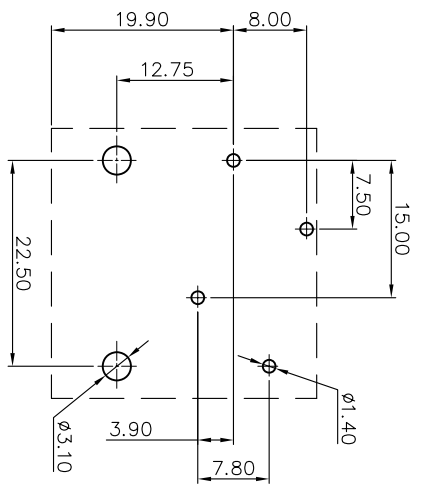

9EDGRH - 7.5 - 04P - 1Y - 100A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:	/	CHKD:	/	
DRFT:	/	TITLE:	CUSTOMER DRAWING	REV
		DRAWING NO.:	/	SHEET
		THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	SCALE

DETACHED LISTS	
THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING