

KFOIL · WOVEN FOIL

Lamination of woven fabric with reflective insulation material.

Insulation material either is:

PURE ALUMINIUM FOIL (>98% reflectivity) or
ALUMINIUM FILM / MPET / METALIZED FOIL (<65% reflectivity).

Premium woven quality provide the product mechanical strength (tensile, tearing etc) and durability.

Lamination with **Polyethylene (PE)** layer comes with SUPERIOR moisture and vapor barrier properties. It improved the product flexibility, impermeable to moisture and vapor.

	UV light transmittance	Moisture penetration
Aluminium Foil, 7μ	0 %	0 g/m ² .day
Metalized PET, 12μ	5 %	0.8 g/m ² .day
PE Transparent, 20μ	95 %	3.7 g/m ² .day
PE Opaque, 20μ	30 %	3.7 g/m ² .day
PET Film, 13μ	91 %	31 g/m ² .day
PVC Film, 250μ	-	3.0 g/m ² .day
PP, 300μ	-	0.2 g/m ² .day

(Data sourced from internet)

Fire Retardant (FR)

Woven Foil (FR)
Woven Foil / Foil (FR)
Woven Foil / Film (FR)

Double-Sided (D/S)

Woven Foil / Foil
Woven Foil / Film
Woven Film / Film

Single-Sided (S/S)

Woven Foil
Woven Film

British Standard

BS 476 **Part 6** - Fire Propagation
BS 476 **Part 7** - Surface Spread of Flame

(Class 1) BS 476 Part 7
(Class 0) BS 476 Part 6 & 7

Testing Body: **SIRIM** | **PSB TUV SINGAPORE**
Certification: **SIRIM** | **PSB TUV SINGAPORE** | **BOMBA**

Malaysia Standard 2095

BS 476 **Part 6** - Fire Propagation
BS 476 **Part 7** - Surface Spread of Flame

(Class 0) BS 476 Part 6 & 7

Testing Body: **SIRIM** | **PSB TUV SINGAPORE**
Certification: **SIRIM** | **BOMBA** | **CIDB**



KFOIL · WOVEN FOIL · DOUBLE SIDED

Double Sided Woven Foil

Double lamination of reflective insulation material on both side of the woven fabric. Reinforced with premium woven quality to increase the mechanical product strength and durability. Special formula Polyethylene (PE) layer lamination giving it SUPERIOR moisture & vapor barrier and improved the product flexibility. Impermeable to moisture and vapor even when is creased.

WOVEN FOIL / FOIL (Fire Retardant) : >98% reflectivity --> Pure Aluminium Foil
MS AWA K750 >98% reflectivity --> Pure Aluminium Foil

WOVEN FOIL / FOIL : >98% reflectivity --> Pure Aluminium Foil
K750A >98% reflectivity --> Pure Aluminium Foil

WOVEN FOIL / FILM : >98% reflectivity --> Pure Aluminium Foil
K756A <65% reflectivity --> Aluminium Film / MPET / Metalized Foil

WOVEN FILM / FILM : <65% reflectivity --> Aluminium Film / MPET / Metalized Foil
K650A <65% reflectivity --> Aluminium Film / MPET / Metalized Foil

Application (E.g.):

- Container House Heat Insulation
- Container Liner
- Heat Insulation Woven bag
- Heat Sensitive Commodity Wrapping
- Bulk Insulation Backing Foil
- Mineral Wool Facing Foil
- Building Heat Insulation (Roof, Wall, Floor)
- Wall & Floor Heat Insulation
- Facing foil for any bulk insulation
- Industry Packaging / Insulating Blanket (Pallet cover, commodity wrapper, box packaging)
- etc



Brand	Product Code	Product Description
KFOIL	K650A	Double Sided Reflective Vapour Barrier Aluminium Metalized Woven Film (5 layers)
KFOIL	K756A	Double Sided Reflective Vapour Barrier Aluminium Woven Foil / Film (5 layers)
KFOIL	K750A	Double Sided Reflective Vapour Barrier Aluminium Woven Foil (5 layers)
KFOIL	MS AWA K750	Fire Retardant Double Sided Radiant Barrier Reflective Aluminium Woven Foil (5 layers) (MS 2095) SIRIM, BOMB, CIDB

KFOIL • K750A

DOUBLE SIDED REFLECTIVE VAPOUR BARRIER ALUMINIUM WOVEN FOIL

- Double Sided **5 Layers** Aluminium Woven Foil.
- 99% Pure Aluminium with high reflectivity (>0.98) and low emissivity (<0.02) surface.
- Reinforced with premium woven quality to increase the mechanical product strength and durability.
- Special formula Polyethylene (PE) layer lamination giving it SUPERIOR moisture & vapor barrier and improved the product flexibility. Impermeable to moisture and vapor even when is creased.
- Due to compaction, disintegration or moisture absorption it's help maintaining the performance over time.

SIZE AVAILABILITY

Customise size are available upon request within machine limits.

Width(m)	Length(m)	Optimum packing
$1.22 \pm 1\%$	$48 \pm 2\%$	140 Rolls / Pallet
$1.25 \pm 1\%$ (Export size)	$60 \pm 2\%$	120 Rolls / Pallet

TECHNICAL DATA


WOVEN FABRIC

GRAMMAGE	120 – 140 gsm
THICKNESS	110 – 130 micron
TENSILE STRENGTH (ASTM D 828)	MD: 11 – 15 kN/m XD: 11 – 15 kN/m
CORROSION/DELAMINATION (95% RH @50°C,30 DAYS)	None
TEAR RESISTANCE	Excellent
VAPOUR BARRIER	Excellent
WATER RESISTANCE	No Delamination

Technical information provided in this data sheet are typical laboratory averages and are used subject to variation. While the information is believed to be reliable and correct. No guarantee or warranty (expressed or implied) can be made regarding specific applications or patent rights. Product specifications are subject to change without prior notice.



greenpages
malaysia

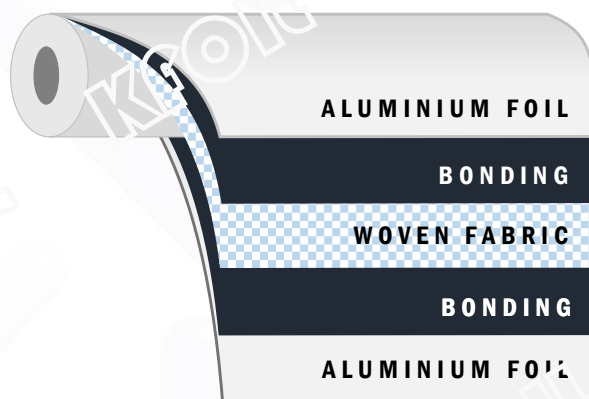

K FOIL INSULATION (MALAYSIA) SDN BHD

9 & 11, KILANG BERKEMBAR, LORONG IKS BUKIT MINYAK 1D, 14000 S.P.T. PULAU PINANG, MALAYSIA

OFFICE TEL: +604 - 5024898

CUSTOMER SERVICE: +6016 4196102

www.kfoil.com.my

sales@kfoil.com.my

salesadmin@kfoil.com.my

ROC: 201101022296 (950435-D)
SST: P13-1808-21009154



K FOIL INSULATION (MALAYSIA) SDN BHD

ROC: 201101022296 (950435-D)

SST: P13-1808-21009154

9 & 11, KILANG BERKEMBAR, LORONG IKS BUKIT MINYAK 1D,
14000 S.P.T. PULAU PINANG, MALAYSIA



+604-5024898
+6016 4196102



sales@kfoil.com.my
salesadmin@kfoil.com.my



/reflectiveinsulation



MEMBERSHIP / RECOGNITION:

greenpages
malaysia



CREAM
Construction Research
Institute of Malaysia

