



UTP7208E-POE-A1



MAKE MAINS ON LOAD HISTORY

Innovative PoE Reset Button Design


One Key VLAN / 250m / Hybrid Fiber and Ethernet Uplink / NI-MH Battery



KEY FEATURES


- One Key **CCTV Mode**
- One Key **PoE Reset Design**
- Innovative **Dual Uplink Ports**
- POE+ Standard **250m**
- Non-grounding Lightning Protection
- Support DC Supply & NI-MH Battery Supply

APPLICATION

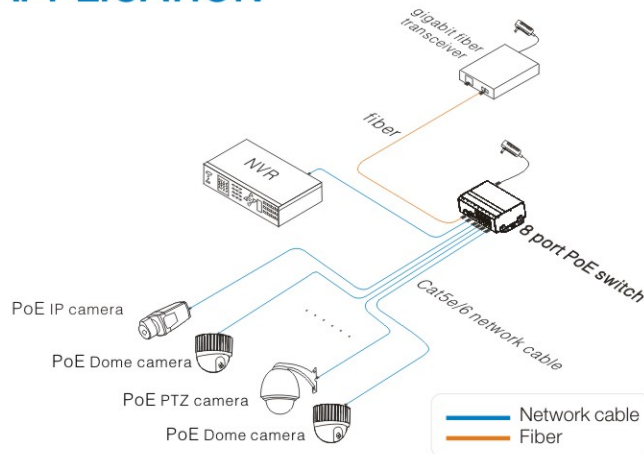


BOARD DIAGRAM


Front Board

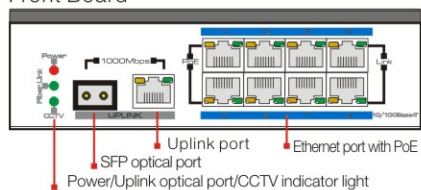


Back Board

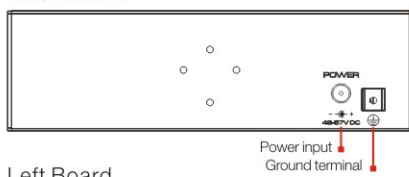

Left Board



Up Board

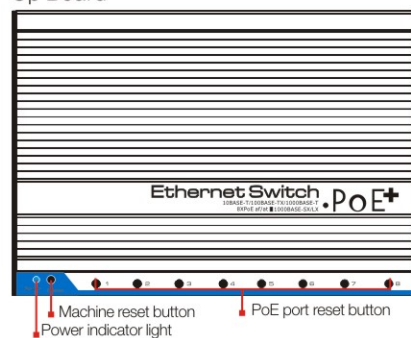

SPECIFICATIONS

Item	8 ports Ethernet Switch	8 ports PoE Ethernet Switch
Power	Power Supply	Power adapter
	Voltage range	DC12V~24V
	Consumption	< 5W
Ethernet Port Parameter	Ethernet Port	1~8 ports: default mode: 10/100Mbps; CCTV mode: 10Mbps; UPLINK Ethernet port: 10/100/1000Mbps; SFP: 1000Mbps
	Transmission Distance	Downlink port: default mode: 0~150m; CCTV mode: 0~250m
	Transmission Medium	Uplink port: 0~150m; SFP: depends on SFP module performance
	PoE Power Supply	Cat5e/6 network cable
Ethernet Exchange Specification	PoE Energy	No
	Ethernet Standard	IEEE802.3af/at protocol
	Exchange way	End-span
	Packet data cache	Single port ≤ 3.0 W
Indicator Status	MAC Address	IEEE802.3 10BASE-T; IEEE802.3u 100BASE-TX; IEEE802.3ab 1000BASE-TX; IEEE802.3z 1000-SX/LX; IEEE802.3 X
	Power Indicator Light	Storage and Forward
	CCTV Indicator Light	1M
	Optical Port LED indicator	8K
Reset	Uplink Ethernet Port Indicator	Front board: 1 pc red Light
	Downlink Ethernet Port Indicator	Front board: 1 pc red Light ;Side board: 1 pc red Light
Protection	PoE Reset Button	1 pc(green), the green light on Indicates CCTV Mode start
	Reset	1pc SFP port working indicator light: green
Operation Environment	Port Lighting Protection	1 pc network working status: green light on RJ 45 port
	ESD	1~8 ports: green light indicates network status, yellow light status, yellow light off
	Working Temperature	1~8 ports : green light indicates network status, yellow light indicates PoE status
Mechanical	Storage Temperature	No
	Humidity(Non-condensing)	No
	Dimension(L x W x H)	Total 8 pcs, corresponding to 1~8 ports, PoE Function reset
Mechanical	Material	1 pc, machine reset
	Color	Level 3, Per: IEC61000-4-5
	Weight	Level 3, Per: IEC61000-4-2
		-40°C~75°C
		-40°C~85°C
		0~95%
		159mm×110mm×46.5mm
		Aluminum
		Black
		545g
		575g