


SPECIFICATION :

	P2000	30553	30612	30613	30526	30527
Engine	Displacement	105.6 CC				
	Fuel Tank Capacity:	1 Gallon				
	Feature	Low Oil Shutdown				
Generator	Rated Watts*	1600 Watts*				
	Surge Watts	2000 Watts				
	Volts	120V	230V			
	Frequency Requirements:	60Hz			50Hz	
	Outlet Configuration	120V 5-15R Duplex/12V DC - Lighter Type	2x Twist-Lock Sockets (L6-30R) 230V/30A with rubber covers 12V DC - Lighter	2x Schuko Sockets with plastic covers 230V/16A 12V DC - Lighter Type	2x Schuko Sockets 230V/16A 12V DC - Lighter Type	2x UK Sockets 230V/13A 12V DC - Lighter Type
	Automatic Idle Control switch (y/n):	Smart Throttle				
	Breaker Configuration	1 pole / DC				
	Agency Approvals Req'd (UL, CSA, City LA, etc)	Rating per CSA Standard 22.2	N/A		CE	

* This generator is rated in accordance with ISO 8528 G3

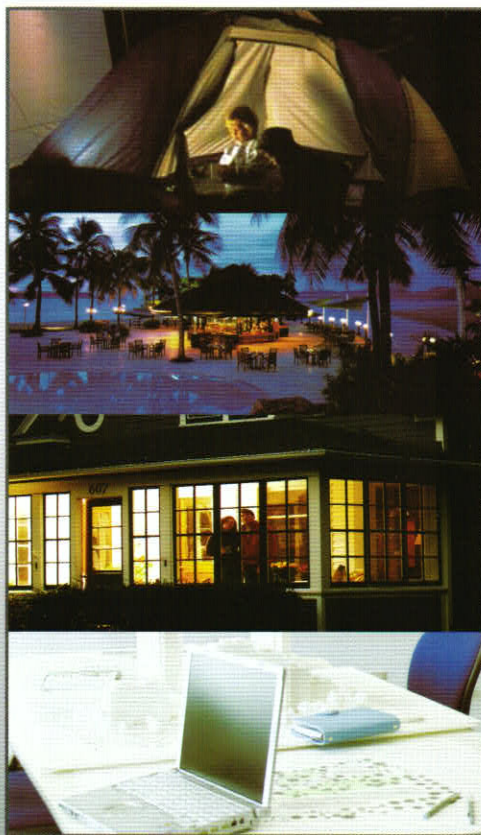

IDEAL FOR:

Camping

Power multiple devices at once like a fridge, toaster and light.

Trade Applications

Use multiple devices like a drill and grinder or an orbital sander and planer.

Home Essentials

Power on in a blackout and keep Home essentials running like your fridge, TV and lamp simultaneously.

Sensitive Electronics

Run sensitive electrical equipment like LCD TV's, laptops, camera and phone charges