



P1000

Coolbeam Zoom Profile Spotlight

Coolbeam Zoom Spotlight series utilise the latest optical technique, which produces even illumination, creating unique and real scene on the stage.

Its light body, constructed using superior quality aluminium for outer casting offers excellent heat dissipation.

The reflection system uses the precise ion plating film reflection bowl and aspherical plano convex lens which reflects over 95% of the visible light source forward and over 85% of the infrared ray and heats backward. The result is lower bulb temperature and longer service life. The luminosity projected is higher than 2000W ordinary tungsten lamp but the temperature generated is 50% lower which is good for the lamp filter.

Luminaire's unique construction makes the maintenance and cleaning more easy. Adjust the lamp to the best position by focus system fast and effectively.


Specification Coolbeam Zoom Profile Spotlight

Item	Description
Zoom Spotlight	15° - 30°
Voltage	240Vac
Lamp	1000W CP71
Socket	GX 9.5
Max. surface Temp.	<200 °C
Max. Ambient Temp	<40 °C
Min. Safe Interval	0.4m
Min. Throw Distance	1.5m
N.W	8.5 Kgs G.W : 10Kgs
Outline size	78 x 24 x 24cm
Packing size	86 x 30.5 x 28cm

Lamp Holder



750W . 15°	4860	1210	542 Lux
NARROW(φ)	1.2	2.3	3.4m
750W . 30°	2206	552	245 Lux
WIDE (φ)	2.5	5.1	7.9m

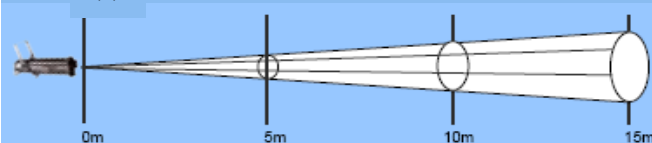

Lamp OSRAM HPL750W / 230V
Lux=Central illuminance

Crisp Beam

Soft Beam



Beam pattern by adjusting focus slider