



## RP101P


### 1CH HD-SDI Repeater for PoC/CoC/Double Reach™

#### Key Features

- \* HD-SDI Repeater supporting PoC/CoC/DoubleReach™\*\*  
PoC(Power over Coax), CoC(Control over Coax)
- \* Power supply to PoC/DoubleReach devices via coaxial cable(PoC)
- \* Camera control data transmission via coaxial cable(CoC)
- \* Further transmission distance extension using multiple repeaters  
(Max. 2 devices between PoC Camera and PoC DVR)
- \* LED indicators for Power, Video input, PoC output, RS485 output
- \* Additional terminal blocks for power input and RS485 output

#### Specification

Video Input	Video Input Standard	1CH(HD-SDI SMPTE 292M, DoubleReach™)
	Resolution	SMPTE 274M (1080p30/25)
Video Output	Video Output Standard	1CH(HD-SDI SMPTE 292M, DoubleReach™)
	Resolution	SMPTE 274M (1080p30/25)
Performance	Function	Equalizing, Reclocking, Cable Driving
	PoC	Power Over Coax, Max. 16W (DC24V)
	CoC	Camera control data transmission, Max, 57600bps
Interface	Indication LED	Power(Red), Video In (Green), PoC Out(Red), RS485 Out (Green)
	RS485	Terminal Block
	Power Input	Terminal Block (Additional Power Input DC24V)
Environmental & Physical	Dimension	134(W) x 65(D) x 26(H) mm
	Weight	Approx. 140g
	Operating Temperature	0°C to 50°C / 20%RH to 80%RH
	Approval	KC, FCC, CE, RoHS, HDcctv

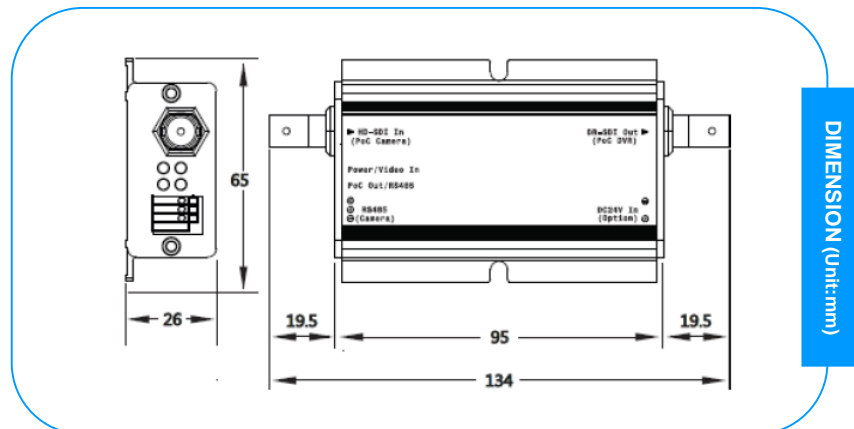

DIMENSION (Unit:mm)