


Features

- 2GB internal memory in SD card
- 8 front direct message playback buttons and 16 remote triggering ports
- MP3 quality of playback with balanced audio output (with MP3 recorded files)
- Recording via dynamic microphone or line audio input
- Message assignment to front key or remote triggering port
- Playback controls mode i.e. Repetitive or Play once and manual operation
- Audio output setup, i.e. volume, treble and bass for message playback
- Dry contact port upon message triggering for interfacing to other devices

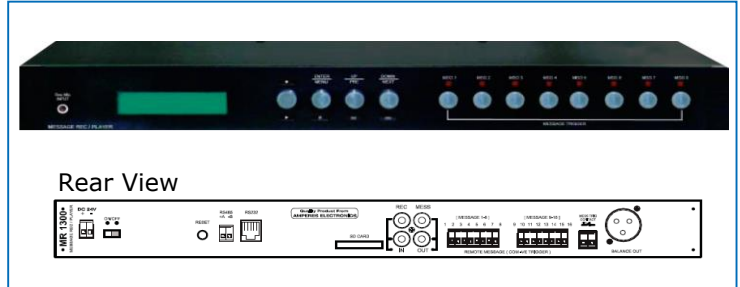

Technical Specifications

Operating Voltage		24V DC
Power Consumption		1.2W
Operating Temperature		0 to 40 deg
Data communication		RS 485 at 19.2 kbps
Remote triggering		16 ports via dry contact
Front triggering		8 direct message playback key
Indicators		LED at switches, LCD display
Inputs	Line input Microphone Input	Unbalanced via RCA jack via front phone jack
Input Sensitivity	Line Microphone	1.2V, 10 K Ohm 0.775V 600 Ohm
Input frequency response	Line Microphone	80 - 19 KHz 180 - 10 KHz
Audio recording sampling rate		PCM : 64kbps
Audio recording	Line Mic recording	Via RCA jack Via front balance mic input
Playback format		PCM, MP3, WMA, etc
Audio output		RCA unbalanced output; 1.2V XLR balanced; line 1.2V
Playback controls		Output level, Playback, Repeat, Stop, Record
S/N ratio		80dB
THD + N		0.1%
Weight / Dimension (W X H X D)		2.05kg / 482 x 44 x 180 mm