


### Features

- Slim design to match environment or hidden from view
- Speaker Type : Dual Cone
- Rated Input : 20W/30W/40W 100V line
- Frequency Response : 75 – 15kHz
- Magnet Weight : 7.5 oz
- Aluminium Die Extrusion Housing

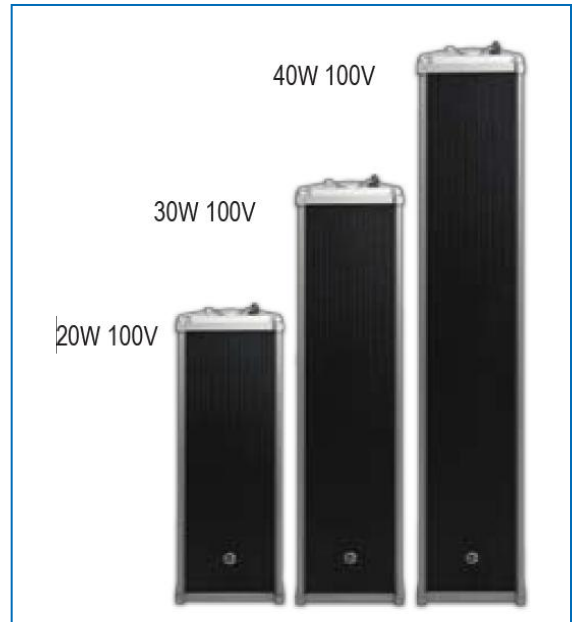

### Description

Built ruggedly with aluminium die cast housing and available in 3 power rating of 20 / 30 and 40W 100V line with dual power tapping. Suitable for classrooms, hyper markets, mosques, etc.

### Technical Specifications

	KCS-420	KCS-430	KCS-440
<b>Power rating</b>	20W 100V	40W 100V	60W 100V
<b>Speaker Component</b>	2 x 4"	3 x 4"	4 x 4"
<b>Tapping (100V line)</b>	10 / 20W	15 / 30W	20 / 40W
<b>Primary impedance (Ohm)</b>	1 K / 500	660 / 330	500 / 230
<b>Secondary Impedance (Ohm)</b>	8 Ohm		
<b>Freq response (+/- 5dB)</b>	85 ~ 15 KHz	80 ~ 15 KHz	75 ~ 15 KHz
<b>SPL @ 1W / m(+/-3dB) 1 KHz</b>	91dB	93dB	95dB
<b>Grille / enclosure</b>	Aluminum / metal grille		
<b>Overall size (WxHxD) (mm)</b>	145 x 400 x 100	145 x 495 x 100	145 x 605 x 100
<b>Weight (kg)</b>	3.2	3.7	4.6
<b>Colour</b>	Dark grey / front black grille		