


### Features

- Slim design to match environment or hidden from view
- Engineered for speech and BGM clarity
- Rated Input : 20W/40W/60W 100V line
- Frequency Response : 230 – 16kHz
- Aluminium Die Extrusion Housing

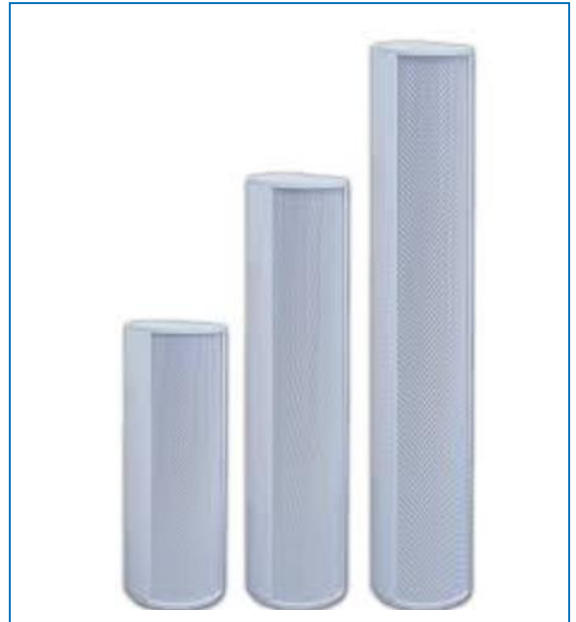

### Description

Built ruggedly with aluminium die extrusion housing and available in 3 power rating of 20/40 and 60W 100V line with dual power tapping.

Suitable for classrooms, hyper markets, mosques, ballroom, factories, passenger terminals, exhibition area etc.

### Technical Specifications

	KCS-920	KCS-940	KCS-960
<b>Power rating</b>	<b>20W 100V</b>	<b>40W 100V</b>	<b>60W 100V</b>
<b>Speaker components</b>	<b>4 x 2"</b>	<b>8 x 2"</b>	<b>12 x 2"</b>
<b>Transformer tapping (100V)</b>	10 / 20W	30/40W	<b>50/60W</b>
<b>Primary impedance (Ohm)</b>	1k / 500	330 /250	<b>200 / 166</b>
<b>Sensitivity (1m / 1w)</b>	87 ± 3dB	88 ± 3dB	<b>89 ± 3dB</b>
<b>Frequency response</b>	<b>230 - 16kHz</b>		
<b>Dimension (mm)</b>	<b>350 x 79 x 89</b>	<b>567 x 79 x 89</b>	<b>782 x 79 x 89</b>
<b>Material</b>	<b>Aluminium</b>		
<b>Weight with bracket (kg)</b>	<b>1.4</b>	<b>2.35</b>	<b>3.2</b>