


## Features

- 8 output triggering ports with user selectable contact options
- 250 preset triggering times with free assignment to any of the output ports
- User interface software for ease of programming
- RS485 data for remote monitoring
- Westminster chime output with adjustable volume

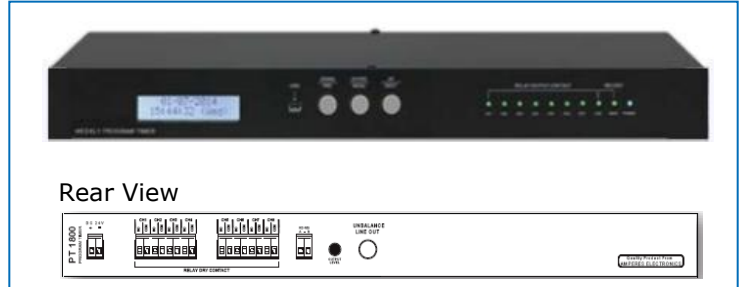

## Technical Specifications

Input Voltage	24V DC; 0.2A
Power Consumption	4.8W
Output channels	8
Triggering mode	ON, OFF, pulse (3 seconds)
Memory	250 preset time
Contact rating	3A
Indicators	LED for triggered channel, Melody, Standby
Output chime	Westminster (Ch. 8 Only)
Chime output level	Line level; 1.2Vrms
Volume attenuation	off to +0 dB
Output connection	1/4" phone jack; unbalanced
Impedance	1K Ohm
Clock backup	CR1220 button battery
RTC accuracy	+/- 2 ppm
Data link	RS485
Baud rate	19.2 kbps
Dimension (W X H X D)	482 x 44 x 180 mm
Weight	2 kg