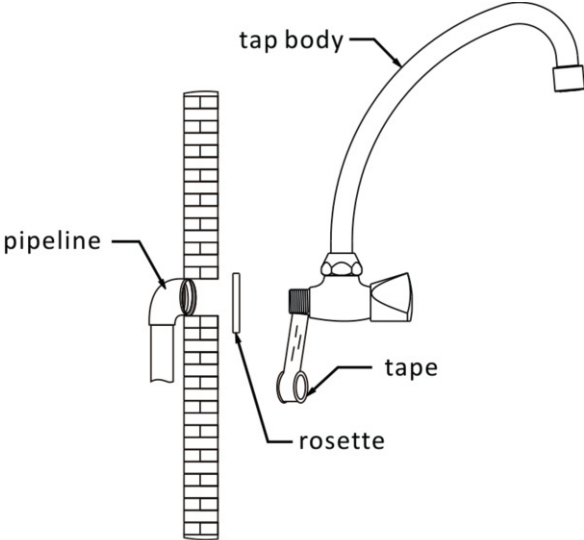


Product Range :	Wall Mounted Faucets			
Product Type :				
Model :	HT-MX-204/UC	HT-MX-203C	HT-MX-205/UC	HT-MX-208/UC

Pre-installation	Cut-out Dimension Diagram
<ul style="list-style-type: none"> ● Before installation, please ensure that the following work conditions are adhered to: <ul style="list-style-type: none"> - Water temperature between 0°C - 90°C - Water pressure between 0.05MPa – 1.0MPa. Pressure reducing valve is necessary if pressure exceeds 1.2MPa - Avoid major pressure differences between hot and cold water supply ● Flush pipes thoroughly before and after installation to ensure water supply is free of any debris. ● Inspect tap fitting and debugged to its best. Do not attempt to disassemble fitting on your own. ● Use thread sealant tape (PTFE) on any screw joining connections and ensure all joints are securely tightened. 	 <p>A. pipeline B. rosette C. tape D. tap body</p>

Installation Steps
<ol style="list-style-type: none"> 1. Install the intake pipeline (A) on the wall. 2. Put the tape (C) around the screw threaded tube, cover the rosette (B) and screw into pipeline. 3. Connect water and check if the screw has been sealed tightly.

WARRANTY:	PRODUCT WARRANTY REGISTRATION:
<ul style="list-style-type: none"> ▪ Lifetime warranty on Anti-rust ▪ 5-year warranty on tap cartridge ▪ 1-year warranty on manufacturing defects 	<ul style="list-style-type: none"> ▪ Log on to www.haustern.com for product warranty registration and more information on terms and conditions ▪ Product serial number 818-0114-00001

CLEANING RECOMMENDATION:
<ul style="list-style-type: none"> ▪ Tap should not be cleaned with abrasive materials such as steel wool or scourers ▪ Do not use any corrosive or abrasive cleaning agents containing acid or scouring agents

This specification is subject to change without notice. FIAMMA TRADING SDN. BHD. will not be held responsible for the use of superseded or voided specifications. Fabricator must check for cut-out accuracy.