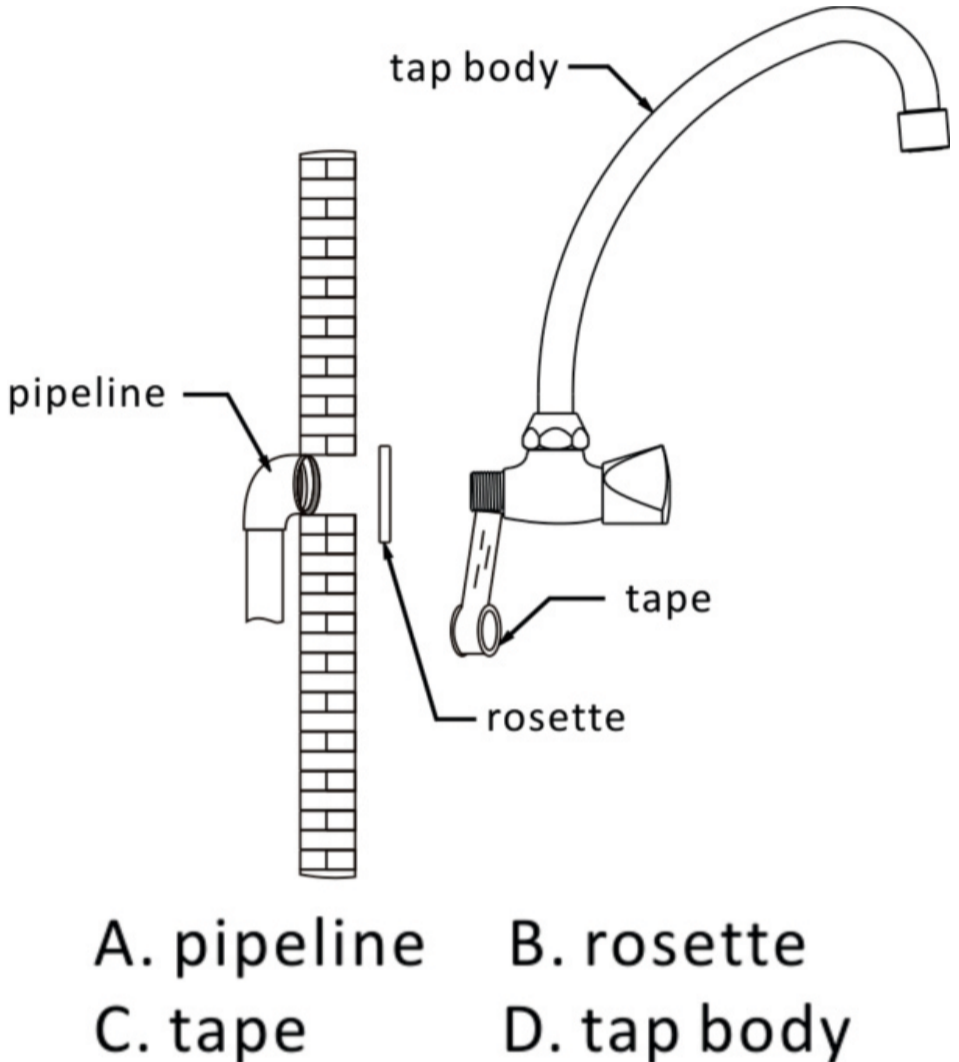


Product Range :	Wall Mounted Faucets			
Product Type :				
Model :	HT-MX-204/UC	HT-MX-203C	HT-MX-205/UC	HT-MX-208/UC
HT-EG-204/UC	HT-EG-402/UC			

Pre-installation	Cut-out Dimension Diagram
<ul style="list-style-type: none"> <li>● Before installation, please ensure that the following work conditions are adhered to: <ul style="list-style-type: none"> <li>-Water temperature between 0°C - 90°C</li> <li>-Water pressure between 0.05MPa – 1.0MPa. Pressure reducing valve is necessary if pressure exceeds 1.2MPa</li> <li>-Avoid major pressure differences between hot and cold water supply</li> </ul> </li> <li>● Flush pipes thoroughly before and after installation to ensure water supply is free of any debris.</li> <li>● Inspect tap fitting and debugged to its best. Do not attempt to disassemble fitting on your own.</li> <li>● Use thread sealant tape (PTFE) on any screw joining connections and ensure all joints are securely tightened.</li> </ul>	 <p>A. pipeline    B. rosette C. tape        D. tap body</p>

Installation Steps
<ol style="list-style-type: none"> <li>1. Install the intake pipeline (A) on the wall.</li> <li>2. Put the tape (C) around the screw threaded tube, cover the rosette (B) and screw into pipeline.</li> <li>3. Connect water and check if the screw has been sealed tightly.</li> </ol>

**WARRANTY:**

- Lifetime warranty on Anti-rust
- 5-year warranty on tap cartridge
- 1-year warranty on manufacturing defects

**PRODUCT WARRANTY REGISTRATION:**

- Log on to [www.haustern.com](http://www.haustern.com) for product warranty registration and more information on terms and conditions
- Product serial number 818-0114-00001

CLEANING RECOMMENDATION:
<ul style="list-style-type: none"> <li>▪ Tap should not be cleaned with abrasive materials such as steel wool or scourers</li> <li>▪ Do not use any corrosive or abrasive cleaning agents containing acid or scouring agents</li> </ul>

*This specification is subject to change without notice. FIAMMA TRADING SDN. BHD. will not be held responsible for the use of superseded or voided specifications. Fabricator must check for cut-out accuracy.*