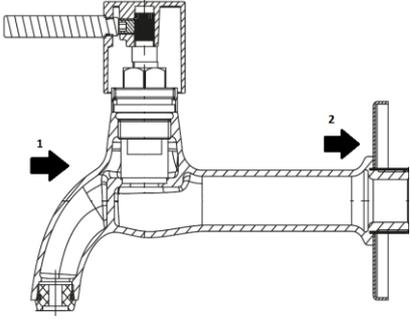

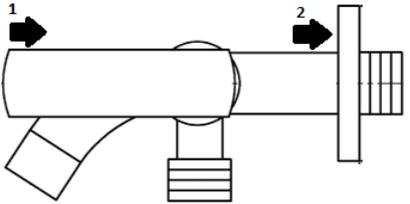



Product Range :	Universal Fitting - Bib Tap / Two Way Bib Tap / Angle Valve			
Model :	HT-BB-130/C	HT-BB-140/C	HT-BB-201/C	HT-BB-009/C

Pre- installation	Cut-Out Dimension Diagram
<p>BEFORE YOU START</p> <p>This tap is suitable for use at water supply pressures of 0.1 bar (min) to 7 bar (max).</p> <p>If the tap is installed into a low pressure (tank fed) system, the minimum height from the outlet of the nozzle to the underside of the water tank should be at least 2 meters to ensure adequate performance.</p> <p>a. Identify all components and check pack contents. b. TURN OFF WATER MAINS SUPPLY. The mains stopcock is usually situated where the supply enters the building. c. It is also recommended that the water heating arrangements are turned off. d. Isolate the water supply.</p>	<p style="text-align: center;">BIB TAP</p>  <p style="text-align: center;">HOSE BIB TAP</p>  <p style="text-align: center;">TWO WAY BIB TAP</p>  <p style="text-align: center;">ANGLE VALVE</p> 
Installation Steps	
<ol style="list-style-type: none"> Apply a suitable approved sealing material over external thread and fit Cover Flange (2) over thread (This may not be required). Screw Tap Body (1) into fixing location. Ensure tap is located in correct position. Check for leaks immediately by turning on water supply. It is always advisable at this stage to flush out the system. To do this, open both valves fully and allow water to flow for approx. 1 minute. This will remove any foreign matter within the installation. (Hose Bib Tap) - Connect the hose into the tap outlet. Applicable for water filter, washing machine, bidet, shower or other purposes. Finally, turn on water supply for usage. 	
After Care	
<p>To maintain the appearance of this fitting, ensure it is cleaned only using a clean soft damp cloth. A solution of warm water and mild liquid detergent may be used where necessary and then rinsed thoroughly. Abrasive cleaners or acidic cleaners MUST NOT BE USED under any circumstances. Avoid contact with solvents.</p>	

WARRANTY:

- Lifetime warranty on Anti-rust.
- 5-year warranty on Tap Cartridge.

PRODUCT WARRANTY REGISTRATION:

- Log on to www.haustern.com for warranty registration and more information on terms and conditions
- Product serial number:

This specification is subject to change without notice. FIAMMA TRADING SDN. BHD. will not be held responsible for the use of superseded or voided specifications. Fabricator must check for cut-out accuracy.

FIAMMA TRADING SDN. BHD. (330476-P)

Wisma Fiamma, No. 20 Jalan 7A/62A, Bandar Manjalara
52200 Kuala Lumpur, Malaysia.

Website: www.haustern.com
Office Number: +603-6279 8888