
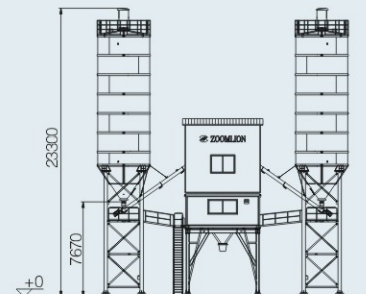
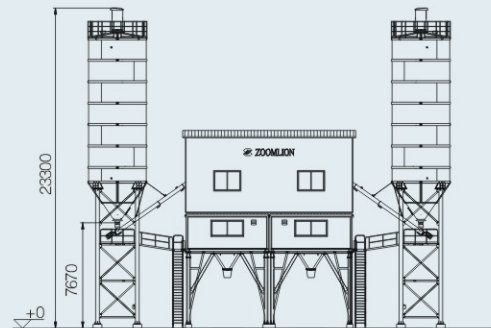
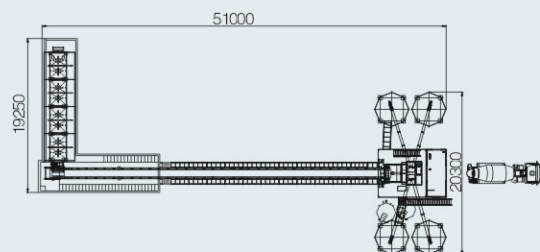
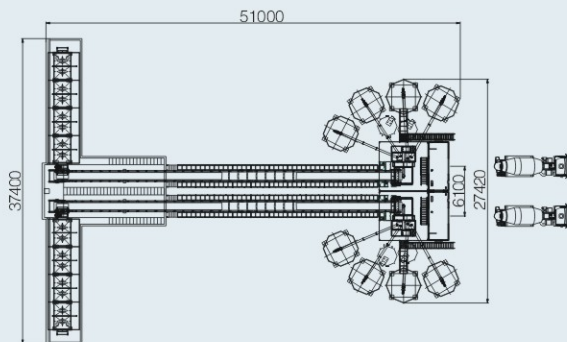


HZS120 & 2×HZS120

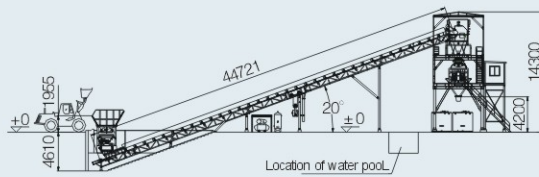

HZS120 & 2×HZS120

Main Features

This mixer is perfect for concrete construction thanks to its excellent mixing performance, accurate and stable measuring, high dependability and its high degree of modularity. It is also easy to maintain and simple to transport. It can be used for various construction projects, for example, roads, railways, ports, bridges and airports etc., as well as in commercial concrete production.

Standard equipment

- Mixer
- Batcher
- Main building
- belt conveyor
- Water weighing and supply system
- Cement weighing system
- Additive weighing and supply system
- Mixer dustproof system
- Pneumatic system
- Monitoring system
- Electrical control system & Operation software
- Powder silo & Powder silo attachment & Screw conveyor

Optional

- The number of gravel storage silos can be adjusted according to the customer's needs;
- The type and number of powder silos can be adjusted based on the customer's needs;
- The operational language can also be modified;
- Includes a wastewater recycling system.

Technical data

Model	HZS120	
Theoretical rated output (m ³ /h)	120	2×120
Mixer	MAO3000/2000SDYHO	
Theoretical producing periods (s)	60s	60s
Aggregate storage	4×25m ³	2×4×25m ³
The conveying capacity of slant belt conveyor (t/h)	900	900
The conveying capacity of screw conveyor (t/h)	90	90
Total power(kw)	210 KW	2×210 KW
Batching range and accuracy of aggregate (kg)	(0-3000)±2%	
Batching range and accuracy of cement (kg)	(0-1000)±1%	
Batching range and accuracy of water (kg)	(0-450)±1%	
Batching range and accuracy of additive (liquid) (kg)	(0-30)±1%	

Technical data and characteristic subject to modifications without notice