



Range Overview

SkyLine ovens and blast chillers

Index

SkyLine Premium ^S Combi Boiler Oven	5
SkyLine Premium Combi Boiler Oven	18
SkyLine Pro ^S Combi Boilerless Oven	25
SkyLine Pro Combi Boilerless Oven	32
SkyLine Chill ^S	39

SkyLine Premium^s

Touch panel
Boiler



Touch panel

Super-intuitive, simple-to-learn and -use and customizable touch screen interface designed to make life easy. Color-blind friendly. Available in over 30 different languages.

101 humidity settings

Add variety to your cooking with 101 humidity settings from 0% to 100% boiler-generated steam, with automatic exhaust valve opening for extra crispy food.

OnE connectivity ready

SkyLine Premium^s connectivity gives real time access to your appliance from any smart device.

Green Version

Triple-glass door reduces energy consumption thanks to higher insulation.

Program mode

Save, organize into categories, and share up to **1.000 recipes** via USB or OnE connectivity.

OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.

6-sensor probe as standard

Precise measurement of the exact core temperature of your food.

Lambda sensor as standard

Precise real-time measurement and control over the humidity in the Oven chamber.

An extra effortless benefit

Stress-free efficiency and productivity with **SkyDuo**. Anticipating your needs with the self-intuitive connection between SkyLine Premium^s Ovens and SkyLine Chill^s and viceversa. The appliances guide you through the Cook&Chill process.


Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks. **Plan-n-Save** organizes your loads in the most time- and energy-efficient way possible.

FIRST in the industry for **Plan-n-Save**

SkyClean

Cut your cleaning costs up to 15%. Flawless cleaning results, **green functions** and **automatic boiler descaling**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 96% biodegradable enzymatic**.

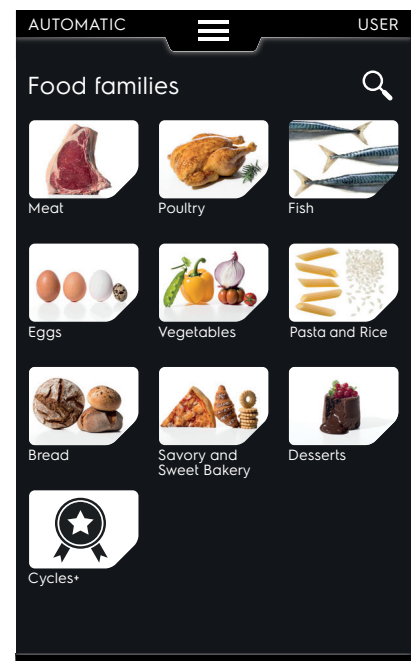

SkyLine Premium^s Combi Boiler Oven

Touch 6GN1/1 electric - Green Version



	229720	229740	229700	229710	229726
Number of grids	6	6	5	6	6
Runner pitch - mm	67	67	85	67	67
External dimensions - mm					
width	867	867	867	867	867
depth	775	775	775	775	775
height	808	808	808	808	808
Electric power - kW	11	11	11	11	11
Electric amperage - A	16,3	16,3	16,3	28,6	16,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•			
Left hinged door					•
3-glass door	•	•	•	•	•

SkyLine Premium^s Combi Boiler Oven


Touch 6GN1/1 electric



	217720	217750	217700	217710	217726	227750
Number of grids	6	6	5	6	6	5
Runner pitch - mm	67	67	85	67	67	80
External dimensions - mm						
width	867	867	867	867	867	867
depth	775	775	775	775	775	775
height	808	808	808	808	808	808
Electric power - kW	11	11	11	11	11	11
Electric amperage - A	16,3	16,3	16,3	28,6	16,3	16,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•				
Left hinged door					•	
Bakery (400x600 mm)						•

SkyLine Premium^s Combi Boiler Oven

Touch 6GN2/1 electric - Green Version



	229721	229741	229711	229727
Number of grids	6	6	6	6
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	808	808	808	808
Electric power - kW	21,4	21,4	21,4	21,4
Electric amperage - A	30.5	30.5	55,7	31,9
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•		
Left hinged door				•
3-glass door	•	•	•	•

SkyLine Premium^s Combi Boiler Oven

Touch 6GN2/1 electric



	217721	217751	217711	217727
Number of grids	6	6	6	6
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	808	808	808	808
Electric power - kW	21,4	21,4	21,4	21,4
Electric amperage - A	31,9	31,9	55,7	31,9
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•		
Left hinged door				•

SkyLine Premium^s Combi Boiler Oven

Touch 10GN1/1 electric - Green Version



	229722	229742	229702	229712	229728
Number of grids	10	10	8	10	10
Runner pitch - mm	67	67	85	67	67
External dimensions - mm					
width	867	867	867	867	867
depth	775	775	775	775	775
height	1058	1058	1058	1058	1058
Electric power - kW	19	19	19	19	19
Electric amperage - A	28,3	28,3	28,3	49,5	28,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•			
Left hinged door					•
3-glass door	•	•	•	•	•

SkyLine Premium^s Combi Boiler Oven


Touch 10GN1/1 electric



	217722	217752	217702	217712	217728	227752
Number of grids	10	10	8	10	10	8
Runner pitch - mm	67	67	85	67	67	80
External dimensions - mm						
width	867	867	867	867	867	867
depth	775	775	775	775	775	775
height	1058	1058	1058	1058	1058	1058
Electric power - kW	19	19	19	19	19	19
Electric amperage - A	28,3	28,3	28,3	49,5	28,3	28,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•				
Left hinged door					•	
Bakery (400x600 mm)						•

SkyLine Premium^s Combi Boiler Oven

Touch 10GN2/1 electric - Green Version



	229723	229743	229713	229729
Number of grids	10	10	10	10
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	1058	1058	1058	1058
Electric power - kW	37,4	37,4	37,4	37,4
Electric amperage - A	55,8	55,8	97,6	55,8
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•		
Left hinged door				•
3-glass door	•	•	•	•

SkyLine Premium^s Combi Boiler Oven

Touch 10GN2/1 electric



	217723	217753	217713	217729
Number of grids	10	10	10	10
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	1058	1058	1058	1058
Electric power - kW	37,4	37,4	37,4	37,4
Electric amperage - A	55,9	55,8	97,6	55,9
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•		
Left hinged door				•

SkyLine Premium^s Combi Boiler Oven

Touch 20GN1/1 electric - Green Version



	229724	229744	229704	229714
Number of grids	20	20	16	20
Runner pitch - mm	63	63	84	63
External dimensions - mm				
width	911	911	911	911
depth	865	865	865	865
height	1794	1794	1794	1794
Electric power - kW	37,7	37,7	37,7	37,7
Electric amperage - A	56,2	56,2	56,2	98,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•		
3-glass door	•	•	•	•

SkyLine Premium^s Combi Boiler Oven

Touch 20GN1/1 electric



	217724	217754	217704	217714	237054
Number of grids	20	20	16	20	16
Runner pitch - mm	63	63	84	63	80
External dimensions - mm					
width	911	911	911	911	911
depth	865	865	865	865	865
height	1794	1794	1794	1794	1794
Electric power - kW	37,7	37,7	37,7	37,7	37,7
Electric amperage - A	56,2	56,2	56,2	98,3	56,2
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Boiler AISI 316L		•			
Bakery (400x600 mm)					•

SkyLine Premium^s Combi Boiler Oven

Touch 20GN2/1 electric - Green Version



	229725	229745	229715
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	1162	1162	1162
depth	1067	1067	1067
height	1794	1794	1794
Electric power - kW	65,4	65,4	65,4
Electric amperage - A	97,6	97,6	170,8
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•	
3-glass door	•	•	•

SkyLine Premium^s Combi Boiler Oven

Touch 20GN2/1 electric



	217725	217755	217715
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	1162	1162	1162
depth	1067	1067	1067
height	1794	1794	1794
Electric power - kW	65,4	65,4	65,4
Electric amperage - A	97,6	97,6	170,8
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•	

SkyLine Premium^s Combi Boiler Oven

Touch 6GN1/1 gas - Green Version



	229760	229790	229770	229766
Number of grids	6	6	6	6
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	808	808	808	808
Gas power - kW	19	19	19	19
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	
Left hinged door				•
3-glass door	•	•	•	•

SkyLine Premium^s Combi Boiler Oven

Touch 6GN1/1 gas



	217780	225760	217790	217760	217786	227780
Number of grids	6	6	6	6	6	5
Runner pitch - mm	67	67	67	67	67	80
External dimensions - mm						
width	867	867	867	867	867	867
depth	775	775	775	775	775	775
height	808	808	808	808	808	808
Gas power - kW	19	19	19	19	19	19
Electric power - kW	1,1	1,1	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•			
Left hinged door					•	
Bakery (400x600 mm)						•
LPG gas				•		

SkyLine Premium^S Combi Boiler Oven

Touch 6GN2/1 gas - Green Version



	229761	229791	229771	229767
Number of grids	6	6	6	6
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	808	808	808	808
Gas power - kW	32	32	32	32
Electric power - kW	1,5	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	
Left hinged door				•
3-glass door	•	•	•	•

SkyLine Premium^S Combi Boiler Oven

Touch 6GN2/1 gas



	217781	225761	217791	217761	217787
Number of grids	6	6	6	6	6
Runner pitch - mm	67	67	67	67	67
External dimensions - mm					
width	1090	1090	1090	1090	1090
depth	971	971	971	971	971
height	808	808	808	808	808
Gas power - kW	32	32	32	32	32
Electric power - kW	1,5	1,5	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•		
Left hinged door					•
LPG gas				•	

SkyLine Premium^s Combi Boiler Oven

Touch 10GN1/1 gas - Green Version



	229762	229792	229772	229768
Number of grids	10	10	10	10
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	1058	1058	1058	1058
Gas power - kW	31	31	31	31
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	
Left hinged door				•
3-glass door	•	•	•	•

SkyLine Premium^s Combi Boiler Oven

Touch 10GN1/1 gas



	217782	225762	217792	217762	217788	227782
Number of grids	10	10	10	10	10	8
Runner pitch - mm	67	67	67	67	67	80
External dimensions - mm						
width	867	867	867	867	867	867
depth	775	775	775	775	775	775
height	1058	1058	1058	1058	1058	1058
Gas power - kW	31	31	31	31	31	31
Electric power - kW	1,1	1,1	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•			
Left hinged door					•	
Bakery (400x600 mm)						•
LPG gas				•		

SkyLine Premium^S Combi Boiler Oven

Touch 10GN2/1 gas - Green Version



	229763	229793	229773	229769
Number of grids	10	10	10	10
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	1058	1058	1058	1058
Gas power - kW	47	47	47	47
Electric power - kW	1,5	1,5	1,5	1,5
Electric amperage - A	6,5	6,5	6,5	6,5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	
Left hinged door				•
3-glass door	•	•	•	•

SkyLine Premium^S Combi Boiler Oven

Touch 10GN2/1 gas



	217783	225763	217793	217763	217789
Number of grids	10	10	10	10	10
Runner pitch - mm	67	67	67	67	67
External dimensions - mm					
width	1090	1090	1090	1090	1090
depth	971	971	971	971	971
height	1058	1058	1058	1058	1058
Gas power - kW	47	47	47	47	47
Electric power - kW	1,5	1,5	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•		
Left hinged door					•
LPG gas				•	

SkyLine Premium^S Combi Boiler Oven

Touch 20GN1/1 gas - Green Version



	229764	229794	229774
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	911	911	911
depth	865	865	865
height	1794	1794	1794
Gas power - kW	54	54	54
Electric power - kW	1,8	1,8	1,8
Electric amperage - A	8,1	8,1	8,1
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•
3-glass door	•	•	•

SkyLine Premium^S Combi Boiler Oven

Touch 20GN1/1 gas



	217784	225764	217794	217764	237064
Number of grids	20	20	20	20	20
Runner pitch - mm	63	63	63	63	63
External dimensions - mm					
width	911	911	911	911	911
depth	865	865	865	865	865
height	1794	1794	1794	1794	1794
Gas power - kW	54	54	54	54	54
Electric power - kW	1,8	1,8	1,8	1,8	1,8
Electric amperage - A	8,1	8,1	8,1	8,1	8,1
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•		
Bakery (400x600 mm)					•
LPG gas				•	

SkyLine Premium^S Combi Boiler Oven

Touch 20GN2/1 gas - Green Version



	229765	229795	229775
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	1162	1162	1162
depth	1067	1067	1067
height	1794	1794	1794
Gas power - kW	100	100	100
Electric power - kW	2,5	2,5	2,5
Electric amperage - A	11,3	11,3	11,3
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•
3-glass door	•	•	•

SkyLine Premium^S Combi Boiler Oven

Touch 20GN2/1 gas



	217785	225765	217795	217765
Number of grids	20	20	20	20
Runner pitch - mm	63	63	63	63
External dimensions - mm				
width	1162	1162	1162	1162
depth	1067	1067	1067	1067
height	1794	1794	1794	1794
Gas power - kW	100	100	100	100
Electric power - kW	2,5	2,5	2,5	2,5
Electric amperage - A	11,3	11,3	11,3	11,3
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	
LPG gas				•

SkyLine Premium

Digital panel

Boiler



Program mode

Save and share your programs via USB or OnE connectivity. 100 free programs and 4 cooking phases.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.



Lambda sensor as standard

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.



SkyClean

Flawless cleaning results and **integrated boiler descaling**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 96% biodegradable enzymatic**.



Digital panel

Digital panel with unique light-guided selection simplifies every task.




11 humidity settings

Add variety to your cooking with **11 humidity settings** from 0% to 100% boiler-generated steam, with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Premium connectivity gives **real time access** to your appliance from any smart device.

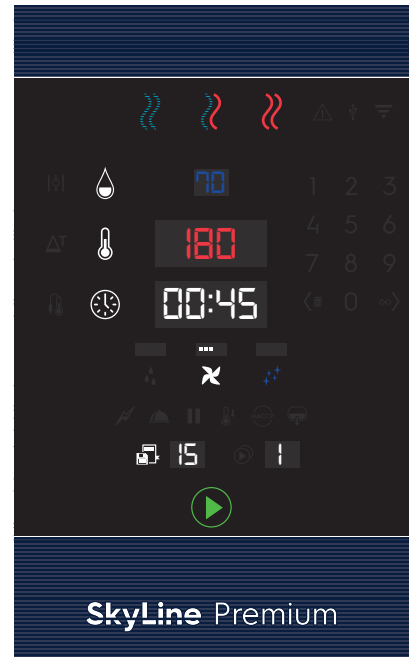

SkyLine Premium Combi Boiler Oven

Digital 6GN1/1 electric



	217820	217850	217800	217810
Number of grids	6	6	5	6
Runner pitch - mm	67	67	85	67
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	808	808	808	808
Electric power - kW	11	11	11	11
Electric amperage - A	16,3	16,3	16,3	28,6
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•		

SkyLine Premium Combi Boiler Oven

Digital 6GN2/1 electric



	217821	217851	217811
Number of grids	6	6	6
Runner pitch - mm	67	67	67
External dimensions - mm			
width	1090	1090	1090
depth	971	971	971
height	808	808	808
Electric power - kW	21,4	21,4	21,4
Electric amperage - A	31,9	31,9	55,7
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•	

SkyLine Premium Combi Boiler Oven

Digital 10GN1/1 electric



	217822	217852	217802	217812
Number of grids	10	10	8	10
Runner pitch - mm	67	67	85	67
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	1058	1058	1058	1058
Electric power - kW	19	19	19	19
Electric amperage - A	28,3	28,3	28,3	49,5
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•		

SkyLine Premium Combi Boiler Oven

Digital 10GN2/1 electric



	217823	217853	217813
Number of grids	10	10	10
Runner pitch - mm	67	67	67
External dimensions - mm			
width	1090	1090	1090
depth	971	971	971
height	1058	1058	1058
Electric power - kW	37,4	37,4	37,4
Electric amperage - A	55,8	55,8	97,6
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•	

SkyLine Premium Combi Boiler Oven

Digital 20GN1/1 electric



	217824	217854	217804	217814
Number of grids	20	20	16	20
Runner pitch - mm	63	63	84	63
External dimensions - mm				
width	911	911	911	911
depth	865	865	865	865
height	1794	1794	1794	1794
Electric power - kW	37,7	37,7	37,7	37,7
Electric amperage - A	56,2	56,2	56,2	98,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•		

SkyLine Premium Combi Boiler Oven

Digital 20GN2/1 electric



	217825	217855	217815
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	1162	1162	1162
depth	1067	1067	1067
height	1794	1794	1794
Electric power - kW	65,4	65,4	65,4
Electric amperage - A	97,6	97,6	170,8
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Boiler AISI 316L		•	

SkyLine Premium Combi Boiler Oven

Digital 6GN1/1 gas



	217880	225860	217890	217860
Number of grids	6	6	6	6
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	808	808	808	808
Gas power - kW	19	19	19	19
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240 V 1N 50 Hz	220-240 V 1N 60 Hz	220-240 V 1N 50 Hz	220-240 V 1N 50 Hz
Boiler AISI 316L			•	
LPG gas				•

SkyLine Premium Combi Boiler Oven

Digital 6GN2/1 gas



	217881	225861	217891	217861
Number of grids	6	6	6	6
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	808	808	808	808
Gas power - kW	32	32	32	32
Electric power - kW	1,5	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8	6,8
Electrical connection	220-240 V 1N 50 Hz	220-240 V 1N 60 Hz	220-240 V 1N 50 Hz	220-240 V 1N 50 Hz
Boiler AISI 316L			•	
LPG gas				•

SkyLine Premium Combi Boiler Oven

Digital 10GN1/1 gas



	217882	225862	217892	217862
Number of grids	10	10	10	10
Runner pitch - mm	67	67	67	85
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	1058	1058	1058	1058
Gas power - kW	31	31	31	31
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240 V 1N 50 Hz	220-240 V 1N 60 Hz	220-240 V 1N 50 Hz	220-240 V 1N 50 Hz
Boiler AISI 316L			•	
LPG gas				•

SkyLine Premium Combi Boiler Oven

Digital 10GN2/1 gas



	217883	225863	217893	217863
Number of grids	10	10	10	10
Runner pitch - mm	67	67	67	67
External dimensions - mm				
width	1090	1090	1090	1090
depth	971	971	971	971
height	1058	1058	1058	1058
Gas power - kW	47	47	47	47
Electric power - kW	1,5	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	
LPG gas				•

SkyLine Premium Combi Boiler Oven

Digital 20GN1/1 gas



	217884	225864	217894	217864
Number of grids	20	20	20	20
Runner pitch - mm	63	63	63	84
External dimensions - mm				
width	911	911	911	911
depth	865	865	865	865
height	1794	1794	1794	1794
Gas power - kW	54	54	54	54
Electric power - kW	1,8	1,8	1,8	1,8
Electric amperage - A	8,1	8,1	8,1	8,1
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	

SkyLine Premium Combi Boiler Oven

Digital 20GN2/1 gas



	217885	225865	217895	217865
Number of grids	20	20	20	20
Runner pitch - mm	63	63	63	63
External dimensions - mm				
width	1162	1162	1162	1162
depth	1067	1067	1067	1067
height	1794	1794	1794	1794
Gas power - kW	100	100	100	100
Electric power - kW	2,5	2,5	2,5	2,5
Electric amperage - A	11,3	11,3	10,4	11,3
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Boiler AISI 316L			•	

SkyLine Pro^S

Touch panel

Steam injection



Program mode

Save, organize into categories, and share up to **1.000 recipes** via USB or OnE connectivity.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.



Lambda sensor (optional)

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.



Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks.



SkyClean

Flawless cleaning results, **green functions**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 96% biodegradable enzymatic**.



Touch panel

Super-intuitive, simple-to-learn and -use touch screen interface designed to make life easy. Adapted for color blindness. Available in over 30 different languages.




11 humidity levels

Add variety to your cooking with **11 humidity levels** and high efficiency instant steam with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Pro^S connectivity gives real time access to your appliance from any smart device.

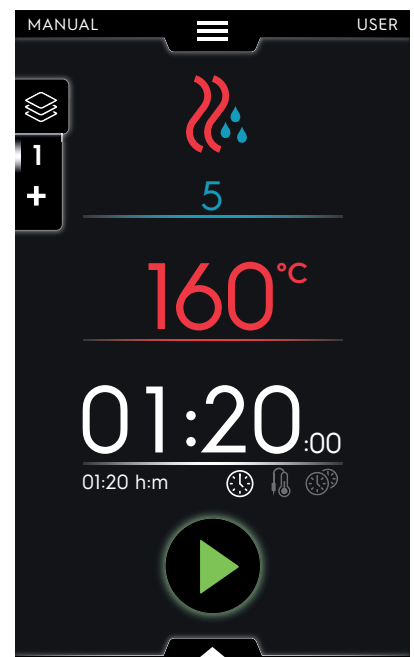

SkyLine Pro^s Combi Boilerless Oven

Touch 6GN1/1 electric



	217620	217600	217610	227650
Number of grids	6	5	6	5
Runner pitch - mm	67	85	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	808	808	808	808
Electric power - kW	11	11	11	11
Electric amperage - A	16,3	16,3	28,6	16,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Bakery (400x600 mm)				•

SkyLine Pro^s Combi Boilerless Oven

Touch 6GN2/1 electric



	217621	217611
Number of grids	6	6
Runner pitch - mm	67	67
External dimensions - mm		
width	1090	1090
depth	971	971
height	808	808
Electric power - kW	21,4	21,4
Electric amperage - A	31,9	55,7
Electrical connection	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz

SkyLine Pro^S Combi Boilerless Oven

Touch 10GN1/1 electric



	217622	217602	217612	227652
Number of grids	10	8	10	8
Runner pitch - mm	67	85	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	1058	1058	1058	1058
Electric power - kW	19	19	19	19
Electric amperage - A	28,3	28,3	49,5	28,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Bakery (400x600 mm)				•

SkyLine Pro^S Combi Boilerless Oven

Touch 10GN2/1 electric



	217623	217613
Number of grids	10	10
Runner pitch - mm	67	67
External dimensions - mm		
width	1090	1090
depth	971	971
height	1058	1058
Electric power - kW	35,4	35,4
Electric amperage - A	52,4	92,4
Electrical connection	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz

SkyLine Pro^S Combi Boilerless Oven

Touch 20GN1/1 electric



	217624	237524	217604	217614
Number of grids	20	16	16	20
Runner pitch - mm	63	80	84	63
External dimensions - mm				
width	911	911	911	911
depth	865	865	865	865
height	1794	1794	1794	1794
Electric power - kW	37,7	37,7	37,7	37,7
Electric amperage - A	56,2	56,2	56,2	98,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Bakery (400x600 mm)		•		

SkyLine Pro^S Combi Boilerless Oven

Touch 20GN2/1 electric



	217625	217615
Number of grids	20	20
Runner pitch - mm	63	63
External dimensions - mm		
width	1162	1162
depth	1067	1067
height	1794	1794
Electric power - kW	65,4	65,4
Electric amperage - A	97,6	170,8
Electrical connection	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz

SkyLine Pro^s Combi Boilerless Oven

Touch 6GN1/1 gas



	217680	225660	217660	227680
Number of grids	6	6	6	5
Runner pitch - mm	67	67	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	808	808	808	808
Gas power - kW	19	19	19	19
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Bakery (400x600 mm)				•
LPG gas			•	

SkyLine Pro^s Combi Boilerless Oven

Touch 6GN2/1 gas



	217681	225661	217661
Number of grids	6	6	6
Runner pitch - mm	67	67	67
External dimensions - mm			
width	1090	1090	1090
depth	971	971	971
height	808	808	808
Gas power - kW	32	32	32
Electric power - kW	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
LPG gas			•

SkyLine Pro^s Combi Boilerless Oven

Touch 10GN1/1 gas



	217682	225662	217662	227682
Number of grids	10	10	10	8
Runner pitch - mm	67	67	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	1058	1058	1058	1058
Gas power - kW	31	31	31	31
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Bakery (400x600 mm)				•
LPG gas			•	

SkyLine Pro^s Combi Boilerless Oven

Touch 10GN2/1 gas



	217683	225663	217663
Number of grids	10	10	10
Runner pitch - mm	67	67	67
External dimensions - mm			
width	1090	1090	1090
depth	971	971	971
height	1058	1058	1058
Gas power - kW	47	47	47
Electric power - kW	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
LPG gas			•

SkyLine Pro^s Combi Boilerless Oven

Touch 20GN1/1 gas



	217684	225664	217664	237534
Number of grids	20	20	20	16
Runner pitch - mm	63	63	63	80
External dimensions - mm				
width	911	911	911	911
depth	865	865	865	865
height	1794	1794	1794	1794
Gas power - kW	54	54	54	54
Electric power - kW	1,8	1,8	1,8	1,8
Electric amperage - A	8,1	8,1	8,1	8,1
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Bakery (400x600 mm)				•
LPG gas			•	

SkyLine Pro^s Combi Boilerless Oven

Touch 20GN2/1 gas



	217685	225665	217665
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	1162	1162	1162
depth	1067	1067	1067
height	1794	1794	1794
Gas power - kW	100	100	100
Electric power - kW	2,5	2,5	2,5
Electric amperage - A	11,3	11,3	11,3
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
LPG gas			•

SkyLine Pro

Digital panel

Steam injection



Program mode

Save and share your programs via USB or OnE connectivity. 100 free programs and 4 cooking phases.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.



Lambda sensor (optional)

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.



SkyClean

Flawless cleaning results. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 96% biodegradable enzymatic**.



Digital panel

Digital panel with unique light-guided selection simplifies every task.




11 humidity levels

Add variety to your cooking with **11 humidity levels** and high efficiency instant steam with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Pro connectivity gives real time access to your appliance from any smart device.

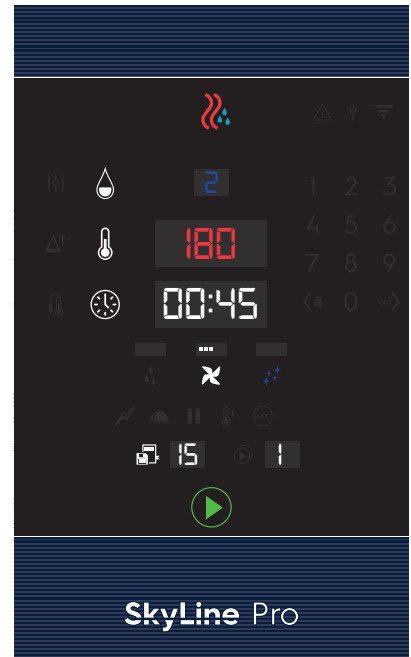

SkyLine Pro Combi Boilerless Oven

Digital 6GN1/1 electric



	217920	217900	217910	227950
Number of grids	6	5	6	5
Runner pitch - mm	67	85	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	808	808	808	808
Electric power - kW	11	11	11	11
Electric amperage - A	16,3	16,3	28,6	16,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Bakery (400x600 mm)				•

SkyLine Pro Combi Boilerless Oven

Digital 6GN2/1 electric



	217921	217911
Number of grids	6	6
Runner pitch - mm	67	67
External dimensions - mm		
width	1090	1090
depth	971	971
height	808	808
Electric power - kW	21,4	21,4
Electric amperage - A	31,9	55,7
Electrical connection	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz

SkyLine Pro Combi Boilerless Oven

Digital 10GN1/1 electric



	217922	217902	217912	227952
Number of grids	10	10	10	8
Runner pitch - mm	67	85	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	1058	1058	1058	1058
Electric power - kW	19	19	19	19
Electric amperage - A	28,3	28,3	49,5	28,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz	380-415V 3N 50/60 Hz
Bakery (400x600 mm)				•

SkyLine Pro Combi Boilerless Oven

Digital 10GN2/1 electric



	217923	217913
Number of grids	10	10
Runner pitch - mm	67	67
External dimensions - mm		
width	1090	1090
depth	971	971
height	1058	1058
Electric power - kW	35,4	35,4
Electric amperage - A	52,8	92,4
Electrical connection	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz

SkyLine Pro Combi Boilerless Oven

Digital 20GN1/1 electric



	217924	237724	217904	217914
Number of grids	20	16	16	20
Runner pitch - mm	63	80	84	63
External dimensions - mm				
width	911	911	911	911
depth	865	865	865	865
height	1794	1794	1794	1794
Electric power - kW	37,7	37,7	37,7	37,7
Electric amperage - A	56,4	56,4	56,4	98,3
Electrical connection	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz
Bakery (400x600 mm)		•		

SkyLine Pro Combi Boilerless Oven

Digital 20GN2/1 electric



	217925	217915
Number of grids	20	20
Runner pitch - mm	63	63
External dimensions - mm		
width	1162	1162
depth	1067	1067
height	1794	1794
Electric power - kW	65.4	65.4
Electric amperage - A	97,6	170,8
Electrical connection	380-415V 3N 50/60 Hz	220-240V 3N 50/60 Hz

SkyLine Pro Combi Boilerless Oven

Digital 6GN1/1 gas



	217980	225960	217960	227980
Number of grids	6	6	6	5
Runner pitch - mm	67	67	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	808	808	808	808
Gas power - kW	19	19	19	19
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Bakery (400x600 mm)				•
LPG gas			•	

SkyLine Pro Combi Boilerless Oven

Digital 6GN2/1 gas



	217981	225961	217961
Number of grids	6	6	6
Runner pitch - mm	67	67	67
External dimensions - mm			
width	1090	1090	1090
depth	971	971	971
height	808	808	808
Gas power - kW	32	32	32
Electric power - kW	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
LPG gas			•

SkyLine Pro Combi Boilerless Oven

Digital 10GN1/1 gas



	217982	225962	217962	227982
Number of grids	10	10	10	8
Runner pitch - mm	67	67	67	80
External dimensions - mm				
width	867	867	867	867
depth	775	775	775	775
height	1058	1058	1058	1058
Gas power - kW	31	31	31	31
Electric power - kW	1,1	1,1	1,1	1,1
Electric amperage - A	5	5	5	5
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz	220-240V 1N 50 Hz
Bakery (400x600 mm)				•
LPG gas			•	

SkyLine Pro Combi Boilerless Oven

Digital 10GN2/1 gas



	217983	225963	217963
Number of grids	10	10	10
Runner pitch - mm	67	67	67
External dimensions - mm			
width	1090	1090	1090
depth	971	971	971
height	1058	1058	1058
Gas power - kW	47	47	47
Electric power - kW	1,5	1,5	1,5
Electric amperage - A	6,8	6,8	6,8
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50Hz
LPG gas			•

SkyLine Pro Combi Boilerless Oven

Digital 20GN1/1 gas



	217984	225964	217964
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	911	911	911
depth	865	865	865
height	1794	1794	1794
Gas power - kW	54	54	54
Electric power - kW	1,8	1,8	1,8
Electric amperage - A	8,1	8,1	8,1
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
LPG gas			•

SkyLine Pro Combi Boilerless Oven

Digital 20GN2/1 gas



	217985	225965	217965
Number of grids	20	20	20
Runner pitch - mm	63	63	63
External dimensions - mm			
width	1162	1162	1162
depth	1067	1067	1067
height	1794	1794	1794
Gas power - kW	100	100	100
Electric power - kW	2,5	2,5	2,5
Electric amperage - A	11,3	11,3	11,3
Electrical connection	220-240V 1N 50 Hz	220-240V 1N 60 Hz	220-240V 1N 50 Hz
LPG gas			•

SkyLine Chill^S

Touch panel



Program mode

Save, organize into categories, and share up to **1000 recipes** via USB or OnE connectivity.



OptiFlow

Flexible, even results whether chilling and freezing thanks to revolutionary high technology design **OptiFlow** air distribution system which guarantees perfect evenness.



6-sensor probe as optional

Extra precise measurement of the exact core temperature of your food. 3-sensor probe as standard.



for 6-sensor probe



ARTE 2.0

Keep their business safe. ARTE 2.0 estimates time remaining on probe-driven cycles based on artificial intelligence technology.



Turbo Cooling

Non-stop chilling for busy kitchens and patisseries. Simply set a working temperature between +10° and -41° C and **SkyLine Chill^S** maintains the set temperature over time.



Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks.



for MyPlanner



An extra effortless benefit

Stress-free efficiency and productivity with **SkyDuo**. Anticipating your needs with the self-intuitive connection between SkyLine Premium^S Ovens and SkyLine Chill^S and viceversa. The appliances guide you through the Cook&Chill process.



Touch panel

Super-intuitive, simple-to-learn and -use and customizable touch screen interface designed to make life easy. Color-blind friendly. Available in over 30 different languages.



OnE connectivity ready


SkyLine Chill^S connectivity gives real time access to your appliance from any smart device.



Automatic mode

Simple and fast to use automatic cycles with 10 families and 9 new **special chilling Cycles***.

Low on space? **SkyLine Chill^S** offers 4 special **LiteHot cycles** too: Chocolate, Proving, Retarded Proving and Fast Thawing.

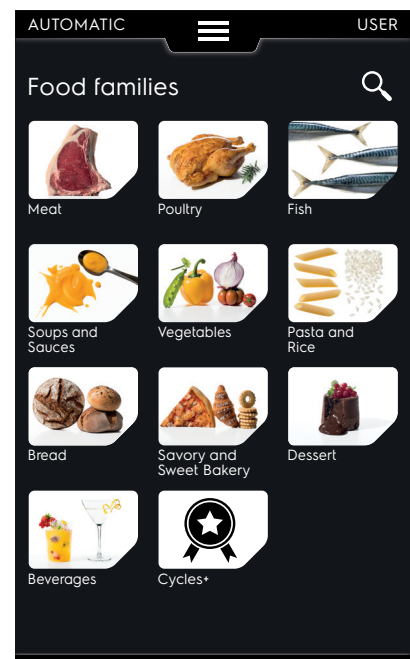

SkyLine Chill^s

30/30 kg - 6GN1/1



	727730	727905	727729	727906	727733	727783
Model	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer
Capacity - kg	30/30	30/30	30/30	30/30	30/30	30/30
Grid type	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream
Number of positions	12	12	12	12	12	12
Runner pitch - mm	30	30	30	30	30	30
External dimensions - mm						
width	897	897	897	897	897	897
depth	937	937	937	937	937	937
height	1060	1060	1020	1020	1060	1060
Refrigeration unit	Built-in	Built-in	Built-in	Built-in	Remote	Built-in
Refrigerant type	R452a	R452a	R452a	R452a	R452a	R452a
Electric power - kW	2,7	2,7	2,7	2,7	0,97	2,7
Electric amperage - A	6,3	6,3	6,3	6,3	4,4	6,3
Electrical connection	380-415V 3N 50Hz	380-415V 3N 50Hz	380-415V 3N 50Hz	380-415V 3N 50Hz	220-240V 1N 50/60Hz	380-415V 3N 50Hz
Tower execution			•			
UV lamp						•
Left-hinged door		•		•		

SkyLine Chill^s

50/50 kg - 10GN1/1



	727736	727907	727737	727734
Model	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer
Capacity - kg	50/50	50/50	50/50	50/50
Grid type	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream	GN 1/1 400x600 mm Ice cream
Number of positions	29	29	29	29
Runner pitch - mm	30	30	30	30
External dimensions - mm				
width	895	895	895	895
depth	939	939	939	939
height	1731	1731	1731	1731
Refrigeration unit	Built-in	Built-in	Remote	Built-in
Refrigerant type	R452a	R452a	R452a	R452a
Electric power - kW	4,15	4,15	0,19	4,15
Electric amperage - A	8,4	8,4	8,6	8,4
Electrical connection	380-415V 3N 50Hz	380-415V 3N 50Hz	220-240V 1N 50/60Hz	380-415V 3N 50Hz
UV lamp				•
Right-hinged door		•		

SkyLine Chill^s

100/70 kg - 10GN2/1



	727740	727908	727741	727876
Model	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer	Chiller/ Freezer
Capacity - kg	100/70	100/70	100/70	100/70
Grid type	GN 2/1 400x600 mm Ice cream	GN 2/1 400x600 mm Ice cream	GN 2/1 400x600 mm Ice cream	GN 2/1 400x600 mm Ice cream
Number of positions	29	29	29	29
Runner pitch - mm	30	30	30	30
External dimensions - mm				
width	1250	1250	1250	1250
depth	1092	1092	1092	1092
height	1730	1730	1730	1730
Refrigeration unit	Built-in	Built-in	Remote	Built-in
Refrigerant type	R452a	R452a	R452a	R452a
Electric power - kW	5,5	5,5	1.9	5,5
Electric amperage - A	11,5	11,5	8.6	11,5
Electrical connection	380-415V 3N 50Hz	380-415V 3N 50Hz	220-240V 1N 50/60Hz	380-415V 3N 50Hz
Right-hinged door		•		
UV lamp				•

SkyLine Chill^s

100/85 kg - 20GN1/1



	727743*	727875
Model	Chiller/ Freezer	Chiller/ Freezer
Capacity - kg	100/85	100/85
Trolley type	GN 1/1 400x600 mm	GN 1/1 400x600 mm
Number of trolleys	1	1
External dimensions - mm		
width	1040	1040
depth	850	850
height	1741	1741
Refrigeration unit	Remote	Remote
Refrigerant type	R452a	R452a
Electric power - kW	0,88	0,88
Electric amperage - A	4,5	4,5
Electrical connection	380-415V 3N 50Hz	380-415V 3N 50Hz
UV lamp		•

*Available model as Chiller only: 727822

SkyLine Chill^s

150/120 kg - 20GN2/1



	727762	727761*
Model	Chiller/ Freezer	Chiller/ Freezer
Capacity - kg	150/120	150/120
Trolley type	GN 2/1 400x600 mm	GN 2/1 400x600 mm
Number of trolleys	1	1
External dimensions - mm		
width	1400	1400
depth	1206	1266
height	2470	2400
Refrigeration unit	Built-in	Remote
Refrigerant type	R452a	R452a
Electric power - kW	6,51	2,25
Electric amperage - A	14	4,1
Electrical connection	380-415V 3N 50Hz	380-415V 3N 50Hz
Roll-in	•	•

*Available model as Chiller only: 727823

SkyLine Chill^s

200/170 kg - 20GN2/1



	727750	727755*	727910	727874	727747
Model	Chiller/Freezer	Chiller/Freezer	Chiller/Freezer	Chiller/Freezer	Chiller/Freezer
Capacity - kg	200/170	200/170	200/170	200/170	200/170
Trolley type	GN 2/1	GN 2/1	GN 2/1	GN 2/1	GN 2/1
Number of trolleys	1	1	1	1	1
External dimensions - mm					
width	1400	1400	1400	1400	1400
depth	1266	1266	1266	1266	1266
height	2470	2270	2270	2270	2340
Refrigeration unit	Built-in	Remote	Remote	Remote	Remote
Refrigerant type	R452a	R452a	R452a	R452a	R452a
Electric power - kW	9,75	2,25	2,25	2,25	2,25
Electric amperage - A	21,2	4,1	4,1	4,1	4,1
Electrical connection	380-415V 3N 50Hz	380-415V 3N 50Hz	380-415V 3N 50Hz	380-415V 3N 50Hz	380-415V 3N 50-60Hz
Roll-in	•	•	•	•	•
Left-hinged door			•		
UV lamp				•	
Insulated floor					•

*Available model as Chiller only: 727824

	727749*	727746	727756	727757	727748	727751
Model	Chiller/Freezer	Chiller/Freezer	Chiller/Freezer	Chiller/Freezer	Chiller/Freezer	Chiller/Freezer
Capacity - kg	200/170	200/170	200/170	200/170	200/170	200/170
Trolley type	GN 2/1	GN 2/1	GN 2/1	GN 2/1	GN 2/1	GN 1/1
Number of trolleys	1	1	1	1	1	2
External dimensions - mm						
width	1400	1400	1400	1400	1400	1800
depth	1395	1395	1266	1266	1266	1266
height	2270	2270	2470	2270	2340	2270
Refrigeration unit	Remote	Remote	Built-in	Remote	Remote	Remote
Refrigerant type	R452a	R407a	R452a	R452a	R452a	R452a
Electric power - kW	2,25	2,25	9,75	2,25	2,25	3,28
Electric amperage - A	4,1	4,1	21,2	4,1	4,1	6,5
Electrical connection	380-415V 3N 50-60Hz	380-415V 3N 50-60Hz	380-415V 3N 50Hz	380-415V 3N 50-60Hz	380-415V 3N 50-60Hz	380-415V 3N 50-60Hz
Roll-in	•	•	•	•	•	•
Delivered disassembled			•	•	•	•
Insulated floor					•	
Pass-through	•	•				

*Available model as Chiller only: 727969



Experience the Excellence
professional.electrolux.com.sg

Follow us on    

ELECTROLUX PROFESSIONAL

Southeast Asia & India Headquarter

Singapore

Phone: +65 6727 2057

Thailand

Phone: +66 2 725 92 53

Malaysia

Phone: +603 5569 1313

India

Phone: +91 124 472 2800

Excellence with the environment in mind

- ▶ All our factories are ISO 14001-certified
- ▶ All our solutions are designed for low consumption of water, energy, detergents and harmful emissions
- ▶ In recent years over 70% of our product features have been updated with the environmental needs of our customers in mind
- ▶ Our technology is ROHS and REACH compliant and over 95% recyclable
- ▶ Our products are 100% quality tested by experts

