



WEBSTER WSP-SERIES

Submersible Pumps




Manual Pump



Auto Pump

SPECIAL FEATURES:

- FIBER REINFORCED VORTEX IMPELLER
- DOUBLE MECHANICAL SEALS
- BUILT-IN THERMAL PROTECTION
- HIGH EFFICIENCY ENERGY MOTOR
- STAINLESS STEEL AND COMPOSITE CONSTRUCTION

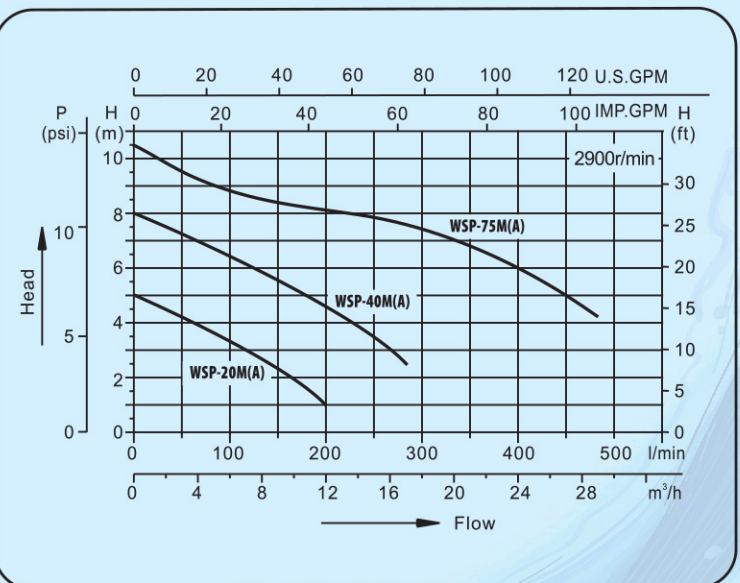

SPECIFICATION

MODEL	POWER		Hmax (m)	Qmax (m³/h)	VOLTAGE	OUTLET (mm)	G.W (kg)	DIMENSION (mm) (W x L x H)
	KW	HP						
WSP 20M	0.2	0.25	5	12	1x240V/50HZ	50 (2")	7.9	160x239x372
WSP 20MA	0.2	0.25	5	12	1x240V/50HZ	50 (2")	7.9	160x239x372
WSP 40M	0.4	0.5	8	17	1x240V/50HZ	50 (2")	8.8	160x239x372
WSP 40MA	0.4	0.5	8	17	1x240V/50HZ	50 (2")	8.8	160x239x372
WSP 75M	0.75	1.0	10.5	29	1x240V/50HZ	50 (2")	9.8	160x239x405
WSP 75MA	0.75	1.0	10.5	29	1x240V/50HZ	50 (2")	9.8	160x239x405

* A : Denotes with built-in automatic float switch!

* Power Cable : Standard 6m power cable with three pin plug

* Product designs and specifications are subject to change without prior notice.