

2.4GHz 300Mbps Hi-Power Outdoor Wireless TDMA Base Station

WIS-S2300

WiD™

TDMA protocol



Ethernet port

≈210Mbps+

real throughput




Product Overview

WIS-S2300 is a 300Mbps 2*2 MIMO Hi-Power outdoor wireless access point based on 802.11b/g/n technology. It is industry weatherproof design with incredible range, cost-effective and dedicated to high performance wireless network solutions. Featuring the revolutionary WiD TDMA technology, the WIS-S2300 is fully compatible with Wisnetworks base station and CPE thus greatly improving the network scalability in throughput and latency. With detachable antenna design, the WIS-S2300 could work seamlessly with all Wisnetworks antennas and provide flexible solutions to customers. WIS-S2300 is best applied to rural wireless Internet, wireless backhaul and other industrial wireless solutions.

Features and Benefits

- WiD TDMA greatly improves the network scalability in throughput and latency
- Seamlessly work with Wisnetworks sector/dish/omni antenna
- Compliant with 802.11b/g/n, speed up to 300Mbps
- High output transmission power and receive sensitivity optimized
- Easy deployment and adjustment with provided mounting kits
- Passive POE(24VDC) for flexible deployment
- Weatherproof design with water cover kit
- Up to 16kV ESD protection

Network Example

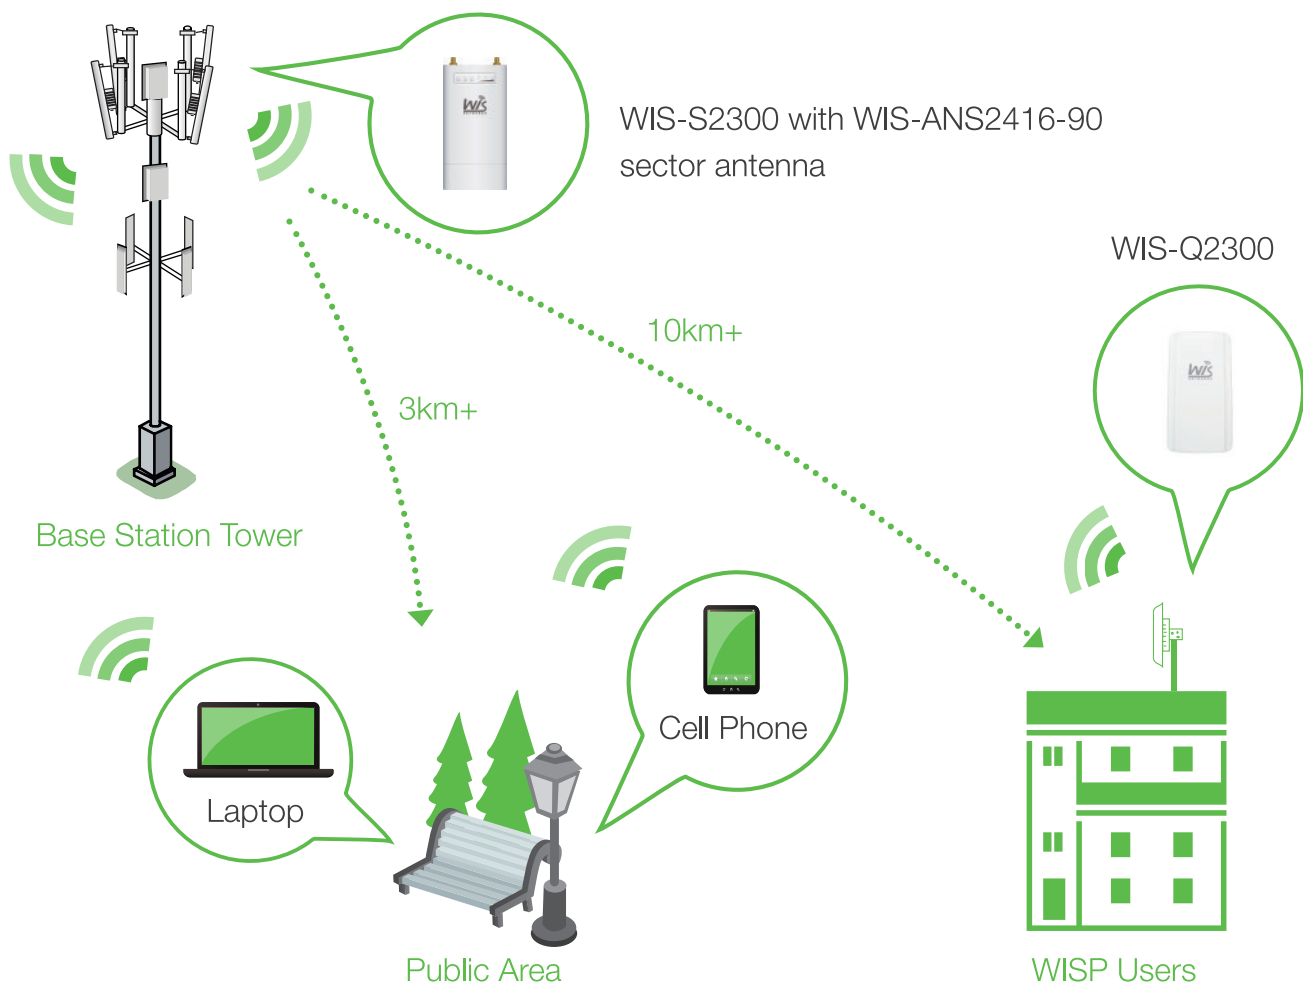

The WIS-S2300 as base station (hotspot) in WISP connection.

Specification

> Radio

- 802.11b/g/n radio (Atheros 600MHz)
- Speed up to 300 Mbps
- Frequency Range: 2.4-2.4835GHz
- Tx Power up to 27dBm
- Rx Sensitivity 300M: -73dBm@10% PER
54M: -78dBm@10% PER
1M: -98dBm@10% PER

> Antenna

- 2* RP-SMA antenna connectors

>Physical Parameters

- Dimension: 164*92*32mm
- Wight: 0.24kg
- Enclosure: Weatherproof ASA
- ESD Protection: 16kV
- Lightning Protection: 2kV
- Working Temp: -30 ~ 70°C
- Storage Temp: -40 ~85°C
- Working Humidity: 10%~95% non-condensing

> Interfaces

- 1x 10/100Base-T Ethernet (RJ45 with Passive PoE)
- Reset

> Power

- 24VDC, 0.75A
- Power Consumption: 6W

>Security

- Integrated Firewall
- WPA/WPA2;WPA-PSK/WPA2-PSK (AES/TKIP) Encryption; 64/128-bit WEP;

>LED

- Power:On/Off
- LAN:On/Off/Flashing
- WLAN:On/Off/Flashing
- RSSI Signal: 1,2,3

>Warranty

- 1 Year

>Certification

- CE, RoHS

>Package content

- WIS-S2300
- Quick Setup Guide
- Power Adapter with Passive PoE
- Mounting kits

Related Antenna



15dBi 120° Sector Antenna
WIS-ANS2415-120



16dBi 90° Sector Antenna
WIS-ANS2416-90



12dBi Omni Antenna
WIS-ANO2412