

WorkMaster 450mm Step Platform FPL 0.6

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ☑ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧴 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |


MEASUREMENTS

| | |
|--------------------------|----------------------|
| 🏋️ Weight | 12.2kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 1.5m |
| ∨ Closed Height | 1.68m |
| ⤴ Platform Height | 0.6m |
| ∟ Handrail Height | 0.9m above platform |
| ⌘ Closed Width | 0.2m |
| 📏 Number of Steps | 2 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 0.6 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |

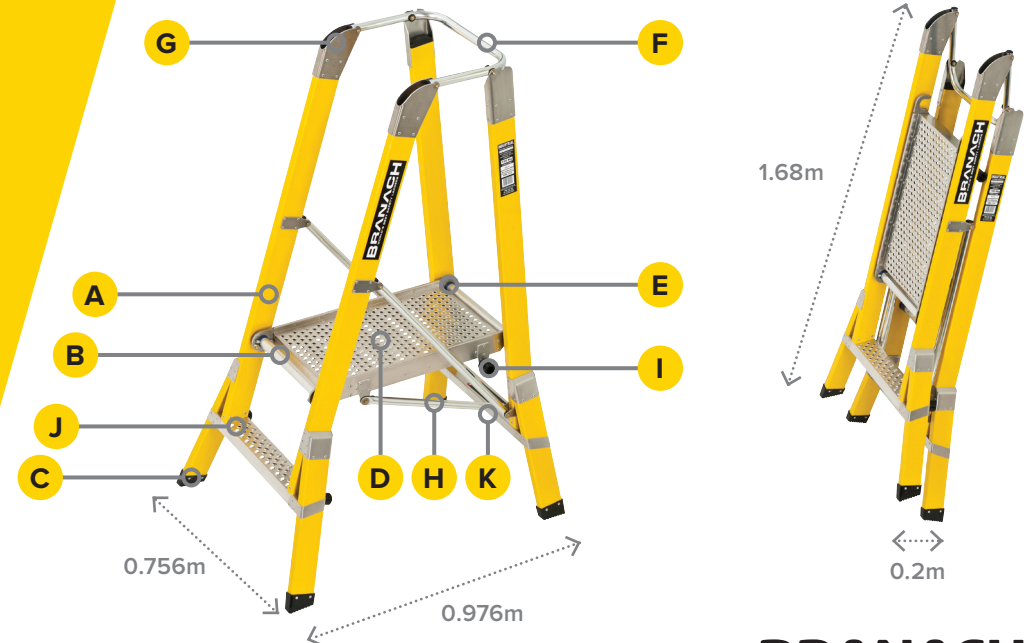

WorkMaster 450mm Step Platform FPL 0.9

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ☑ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧪 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |


MEASUREMENTS

| | |
|--------------------------|----------------------|
| 🏋️ Weight | 14kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 1.8m |
| ∨ Closed Height | 1.98m |
| ⤴ Platform Height | 0.9m |
| ⌋ Handrail Height | 0.9m above platform |
| ⌘ Closed Width | 0.2m |
| 🪜 Number of Steps | 3 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 0.9 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |

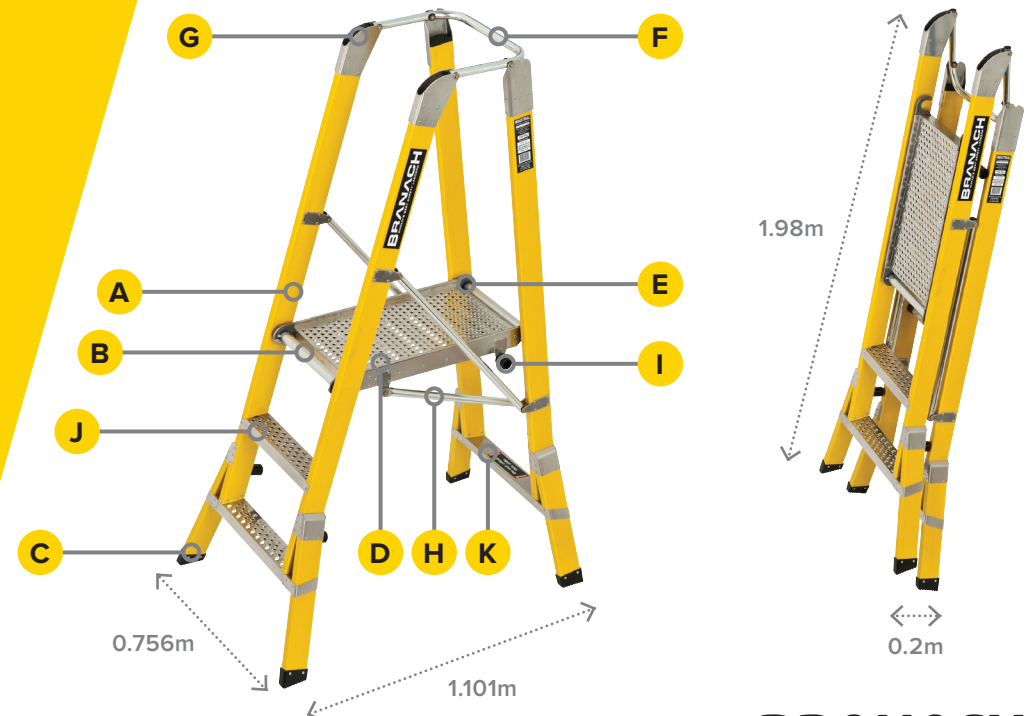

WorkMaster 450mm Step Platform FPL 1.2

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ☑ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧪 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |


MEASUREMENTS

| | |
|--------------------------|----------------------|
| 🏋️ Weight | 15.8kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 2.1m |
| ∨ Closed Height | 2.28m |
| ↗ Platform Height | 1.2m |
| ∟ Handrail Height | 0.9m above platform |
| ✂ Closed Width | 0.2m |
| 📏 Number of Steps | 4 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 1.2 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |

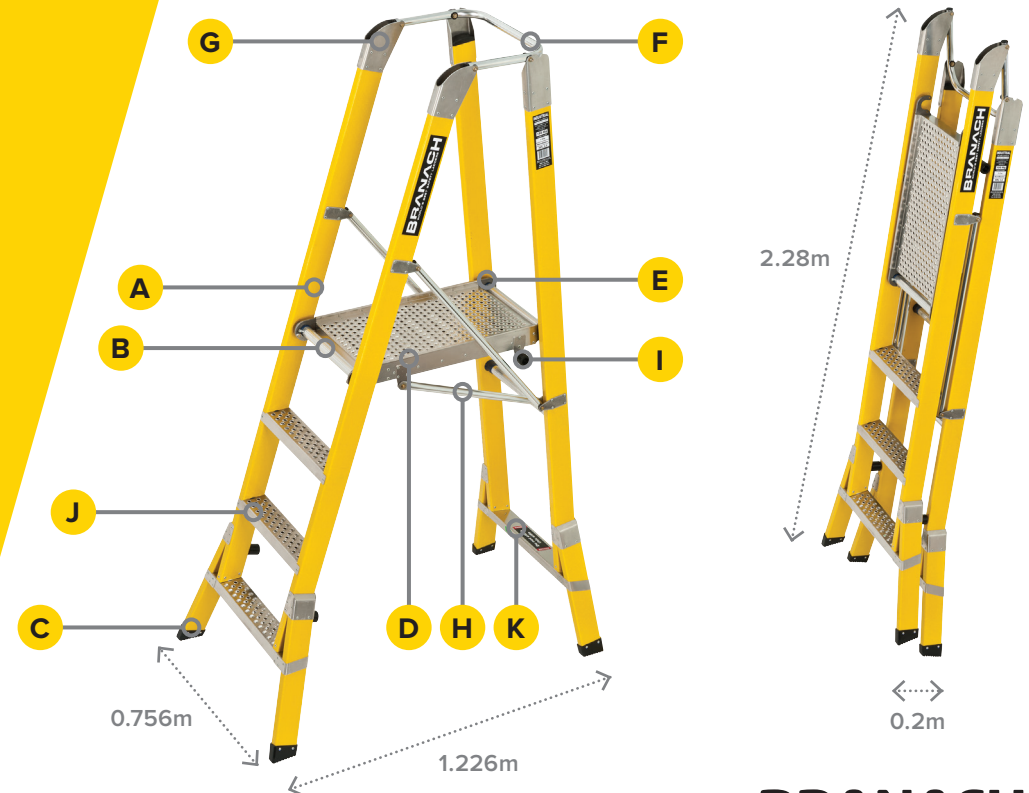

WorkMaster 450mm Step Platform FPL 1.5

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ✓ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧴 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |

MEASUREMENTS

| | |
|--------------------------|----------------------|
| 🏋️ Weight | 17.6kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 2.4m |
| ∨ Closed Height | 2.58m |
| ⤴ Platform Height | 1.5m |
| └ Handrail Height | 0.9m above platform |
| ⌘ Closed Width | 0.2m |
| 🪜 Number of Steps | 5 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 1.5 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |



WorkMaster 450mm Step Platform FPL 1.8

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ☑ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧪 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |

MEASUREMENTS

| | |
|--------------------------|----------------------|
| 🏋️ Weight | 19.4kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 2.7m |
| 📏 Closed Height | 2.88m |
| 📏 Platform Height | 1.8m |
| 📏 Handrail Height | 0.9m above platform |
| ✂ Closed Width | 0.2m |
| 📏 Number of Steps | 6 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 1.8 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |



WorkMaster 450mm Step Platform FPL 2.1

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ☑ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧴 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |

MEASUREMENTS

| | |
|--------------------------|----------------------|
| 🏋️ Weight | 21.2kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 3.0m |
| ∨ Closed Height | 3.18m |
| ⤴ Platform Height | 2.1m |
| ⌋ Handrail Height | 0.9m above platform |
| ✂ Closed Width | 0.2m |
| 🪜 Number of Steps | 7 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 2.1 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |



WorkMaster 450mm Step Platform FPL 2.4

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ☑ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧴 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |


MEASUREMENTS

| | |
|--------------------------|----------------------|
| 🏋️ Weight | 23kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 3.3m |
| ∨ Closed Height | 3.48m |
| ⤴ Platform Height | 2.4m |
| ⌋ Handrail Height | 0.9m above platform |
| ✂ Closed Width | 0.2m |
| 🪜 Number of Steps | 8 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 2.4 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |

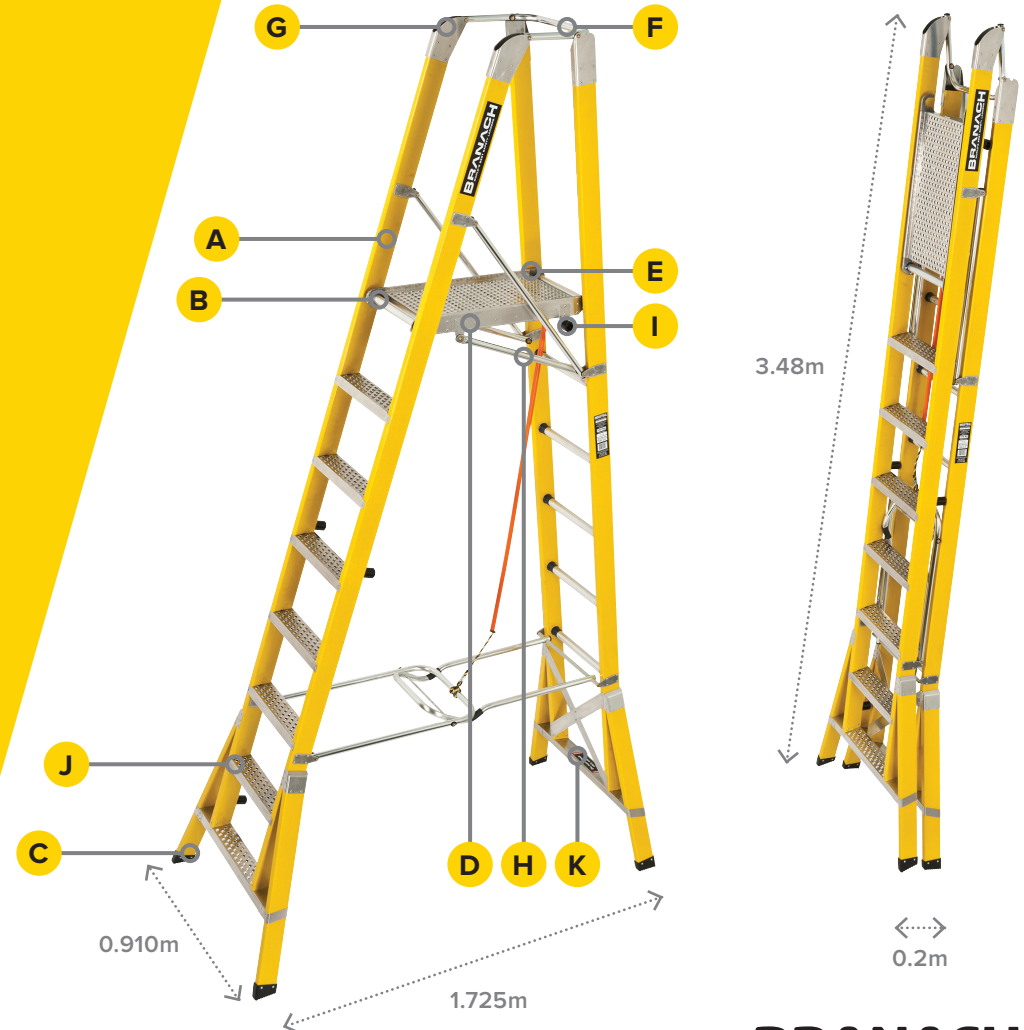

WorkMaster 450mm Step Platform FPL 3.0

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ☑ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧴 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |

MEASUREMENTS

| | |
|--------------------------|-----------------------|
| 🏋️ Weight | 26.6kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 3.9m |
| ∨ Closed Height | 4.08m |
| ↗ Platform Height | 3.0m |
| ┌ Handrail Height | 0.9m above platform |
| ⌘ Closed Width | 0.2m |
| 🪜 Number of Steps | 10 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 3.0 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |



WorkMaster 450mm Step Platform FPL 3.6

Technical Data Sheet

PROPERTIES

| | |
|-------------------------------|---------------------------------------|
| ✓ Standards | AS/NZS 1892.3 / ANSI A 14.5-2000 |
| ⚠ Load Rating | 150kg |
| ⚡ Electrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| 🔥 Heat Resistance | 130 Degrees Celsius |
| 🧴 Chemical Resistance | Tested to AS/NZS 1892.3 |
| ☁ Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🛠 Warranty | 3 years from date of manufacturing |

MEASUREMENTS

| | |
|--------------------------|-----------------------|
| 🏋️ Weight | 30.2kg |
| ↕ Distance Between Rungs | 0.305m |
| ◇ Open Height | 4.5m |
| ∨ Closed Height | 4.68m |
| ⤴ Platform Height | 3.6m |
| ⌋ Handrail Height | 0.9m above platform |
| ✂ Closed Width | 0.2m |
| 🪜 Number of Steps | 12 including platform |

COMPONENTS

| | |
|-------------------|--|
| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
| B Rungs | Round: Alloy 6060 / Mg 0.35-0.6 / Ti 0.10% |
| C Feet | Thermoplastic Polyurethane |
| D Platform Deck | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| E Platform Hooks | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| F Handrail | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| G Brackets | Alloy 5083-H116 / Mg 4.0-4.9 / Ti 0-0.15% |
| H Rods and Struts | Alloy 6463-T6 / Mg 0.3-0.9 / Ti 0% |
| I Spacer | Polyethylene |
| J Step Plates | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| K Rear Step | Alloy 5052/5251 / Mg 2.2-2.8 / Ti 0% |
| Rivets | Zinc Plated Low Carbon Steel |
| Nuts | Plated Mild Steel with gold passivate |
| Washers | Plated Mild Steel with gold passivate |

| | |
|----------------------------|--|
| Product Code | FPL 3.6 |
| Manufacturer's Name | Branach Manufacturing Pty Ltd |
| Phone Number | +613 9761 6633 |
| Certified By (Name, Title) | Pat Driscoll Business Development Manager |
| Last Updated | 5/11/2015 |



4.68m

0.910m

2.225m

0.2m