

PowerMaster Single FND 2.4

Technical Data Sheet

Product Code	FND 2.4
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


✓ Standards	AS/NZS 1892.3
⚠ Load Rating	160kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧴 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

⚖ Weight	Fly: 5.6kg / Base: 5.7kg
↕ Distance Between Rungs	0.305m
📏 Height	Fly: 2.465m / Base: 2.435m
📏 Height to Top Rung	2.090m
↔ Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	D-Rung: Aluminium 6060
C Feet	Swivel: 35% GF Nylon
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon
Rivets	Zinc Plated Low Carbon Steel

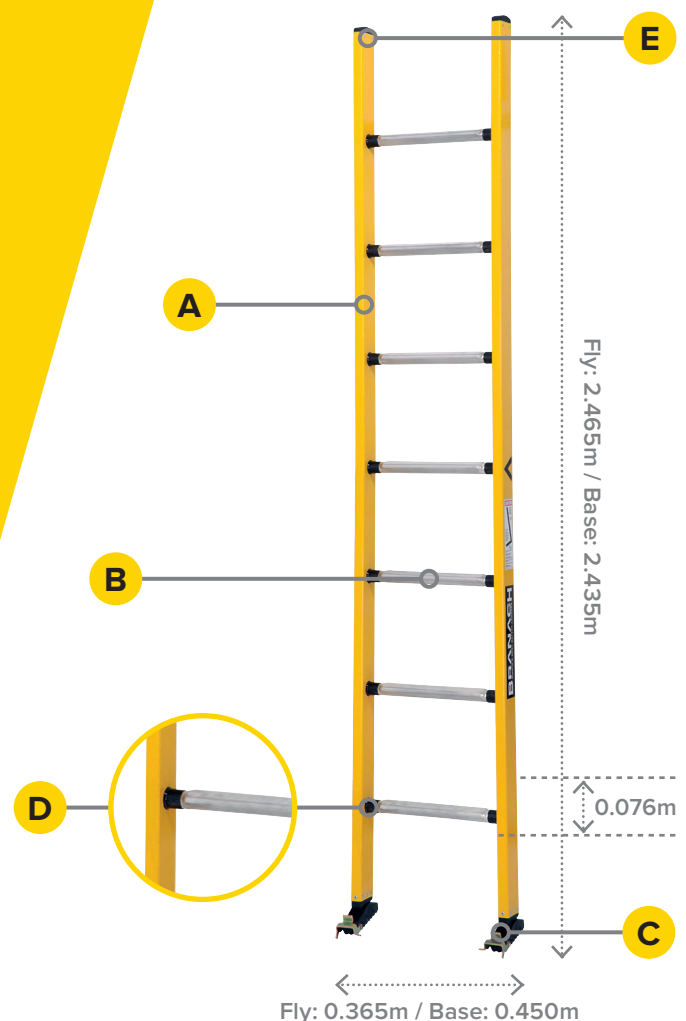







PowerMaster Single FND 3.0






Technical Data Sheet

Product Code	FND 3.0
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015






PROPERTIES


<input checked="" type="checkbox"/> Standards	AS/NZS 1892.3
 Load Rating	160kg
 Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
 Heat Resistance	130 Degrees Celsius
 Chemical Resistance	Tested to AS/NZS 1892.3
 Accelerated Weathering Test	Tested to AS 2331.3.1
 Warranty	3 years from date of manufacturing

MEASUREMENTS

 Weight	Fly: 7.1kg / Base: 7.2kg
 Distance Between Rungs	0.305m
 Height	Fly: 3.075m / Base: 3.045m
 Height to Top Rung	2.690m
 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

 A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
 B Rungs	D-Rung: Aluminium 6060
 C Feet	Swivel: 35% GF Nylon
 D Rung Wear Strip	HD Polyethylene
 E End Caps	35% GF Nylon
Rivets	Zinc Plated Low Carbon Steel

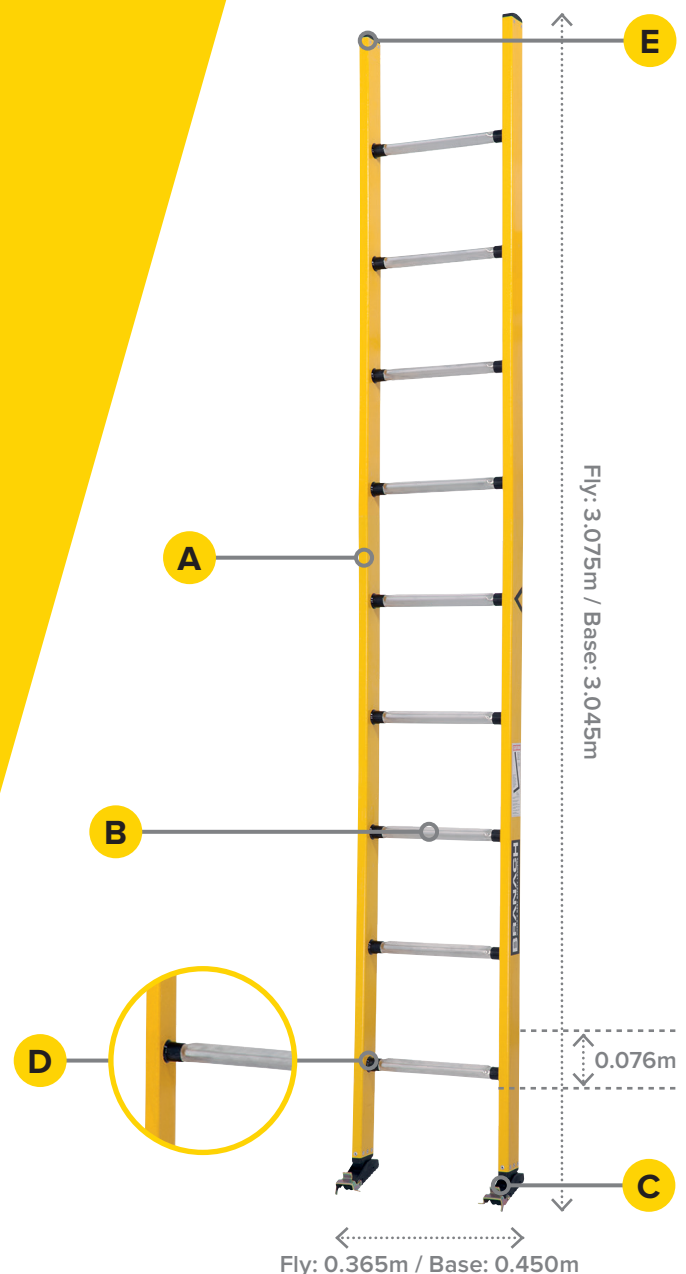

PowerMaster Single FND 3.6

Technical Data Sheet

Product Code	FND 3.6
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


✓ Standards	AS/NZS 1892.3
⚠ Load Rating	160kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧴 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

🏋 Weight	Fly: 8.6kg / Base: 8.7kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 3.685m / Base: 3.655m
📏 Height to Top Rung	3.290m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	D-Rung: Aluminium 6060
C Feet	Swivel: 35% GF Nylon
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon
Rivets	Zinc Plated Low Carbon Steel

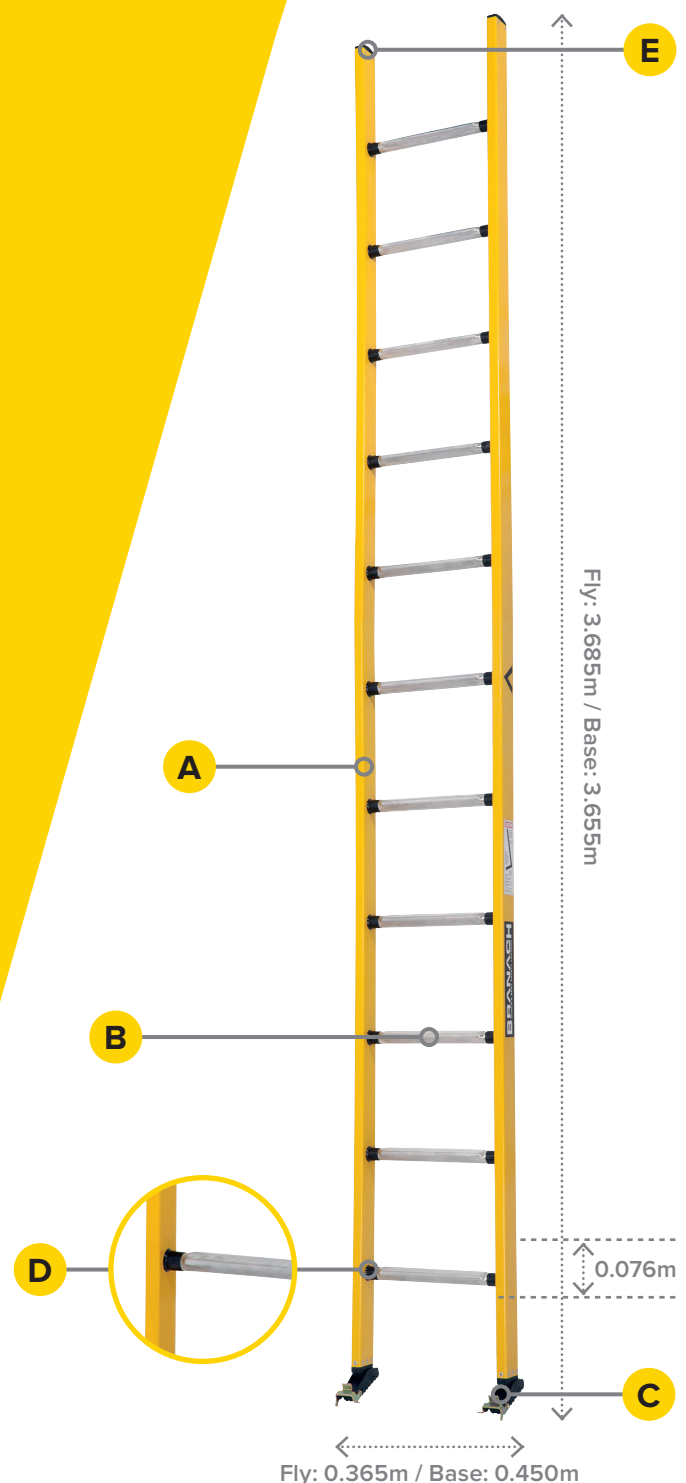

PowerMaster Single FND 4.2

Technical Data Sheet

Product Code	FND 4.2
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES

✓ Standards	AS/NZS 1892.3
⚠ Load Rating	160kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧴 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

🏋 Weight	Fly: 11.5kg / Base: 12.1kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 4.295m / Base: 4.265m
📏 Height to Top Rung	3.890m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	D-Rung: Aluminium 6060
C Feet	Swivel: 35% GF Nylon
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon
Rivets	Zinc Plated Low Carbon Steel



PowerMaster Single FND 4.8

Technical Data Sheet

Product Code	FND 4.8
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


✓ Standards	AS/NZS 1892.3
⚠ Load Rating	160kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧴 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

⚖ Weight	Fly: 13.5kg / Base: 13.8kg
📏 Distance Between Rungs	0.305m
📏 Height	Fly: 4.905m / Base: 4.875m
📏 Height to Top Rung	4.490m
📏 Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	D-Rung: Aluminium 6060
C Feet	Swivel: 35% GF Nylon
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon
Rivets	Zinc Plated Low Carbon Steel

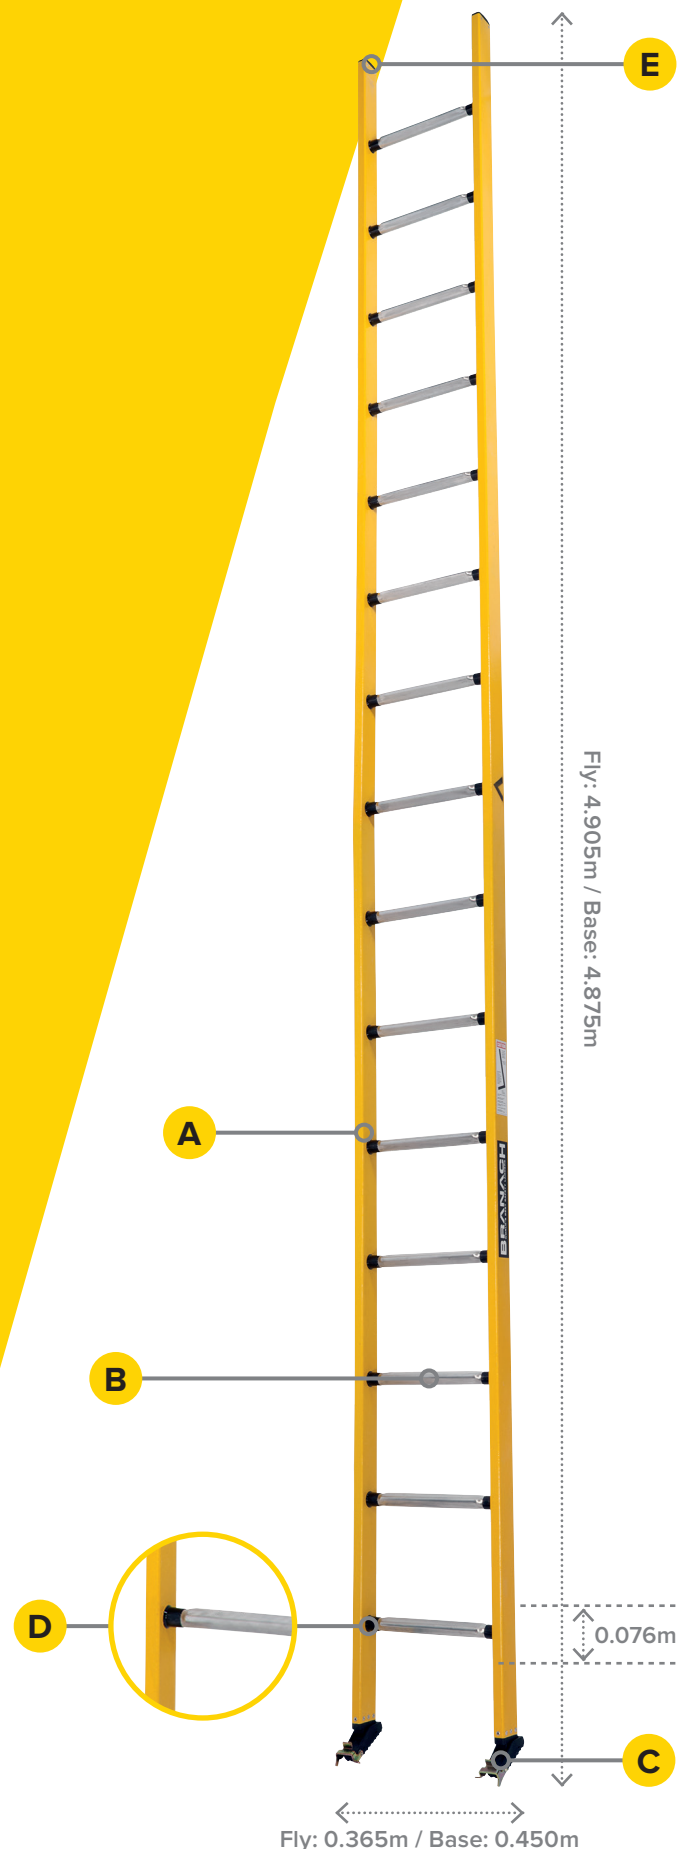

PowerMaster Single FND 5.5

Technical Data Sheet

Product Code	FND 5.5
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES

✓ Standards	AS/NZS 1892.3
⚠ Load Rating	160kg
⚡ Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
🔥 Heat Resistance	130 Degrees Celsius
🧴 Chemical Resistance	Tested to AS/NZS 1892.3
☀ Accelerated Weathering Test	Tested to AS 2331.3.1
🛠 Warranty	3 years from date of manufacturing

MEASUREMENTS

⚖ Weight	Fly: 14.9kg / Base: 15.2kg
↕ Distance Between Rungs	0.305m
📏 Height	Fly: 5.515m / Base: 5.485m
📏 Height to Top Rung	5.090m
↔ Width	Fly: 0.365m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	D-Rung: Aluminium 6060
C Feet	Swivel: 35% GF Nylon
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon
Rivets	Zinc Plated Low Carbon Steel

