



PEX-215LED

Self-Contained Emergency KELUAR Sign

PEX-215LED (Super Bright Light Emitting Diodes)



Specifications


MODEL.....	➡	PEX-215 LED
MODE.....	➡	Maintained
WEIGHT.....	➡	~1.2 kg
BATTERY.....	➡	2 x 1.2V 1.6AH nickel metal hydride (NiMH) battery
HOUSING.....	➡	Electro-galvanised sheet steel with powder coated paint
CHARGER.....	➡	Constant current
MOUNTING.....	➡	Surface mounting direct to wall or ceiling
DIMENSION.....	➡	556mm (L) x 52mm (W) x 155mm (H)
MONITORING.....	➡	Red LED indicating healthy supply and charging
COMPLIANCE.....	➡	MS 983 : 2004, MS 619 : Part 102 : Sect. 102.22 : 1985 (P); MS IEC 60598-1 : 2006 Jabatan Bomba Dan Penyelamat Malaysia certified
LIGHT SOURCE.....	➡	18 nos super bright LED (SMD)
INPUT VOLTAGE.....	➡	240 V +/- 10% 50Hz
RECHARGE PERIOD.....	➡	16 - 24 hours
BACK-UP DURATION.....	➡	3 hours
BATTERY PROTECTION.....	➡	Low voltage cut-off to prevent battery from over discharging
POWER CONSUMPTION.....	➡	< 5 VA
DEGREE OF PROTECTION.....	➡	IP-20
OPERATING TEMPERATURE.....	➡	0° C to 65° C

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)
No.3, Jln SS26/13, Taman Mayang Jaya
47301, Petaling Jaya, Selangor Darul Ehsan.
Tel : (6)03-78037488 (Hunting)
Fax : (6)03-78038509
E-mail : sales@pnesys.com.my
Website : www.pnesys.com.my

MODEL PEX-215LED

Self-Contained Emergency Keluar Sign

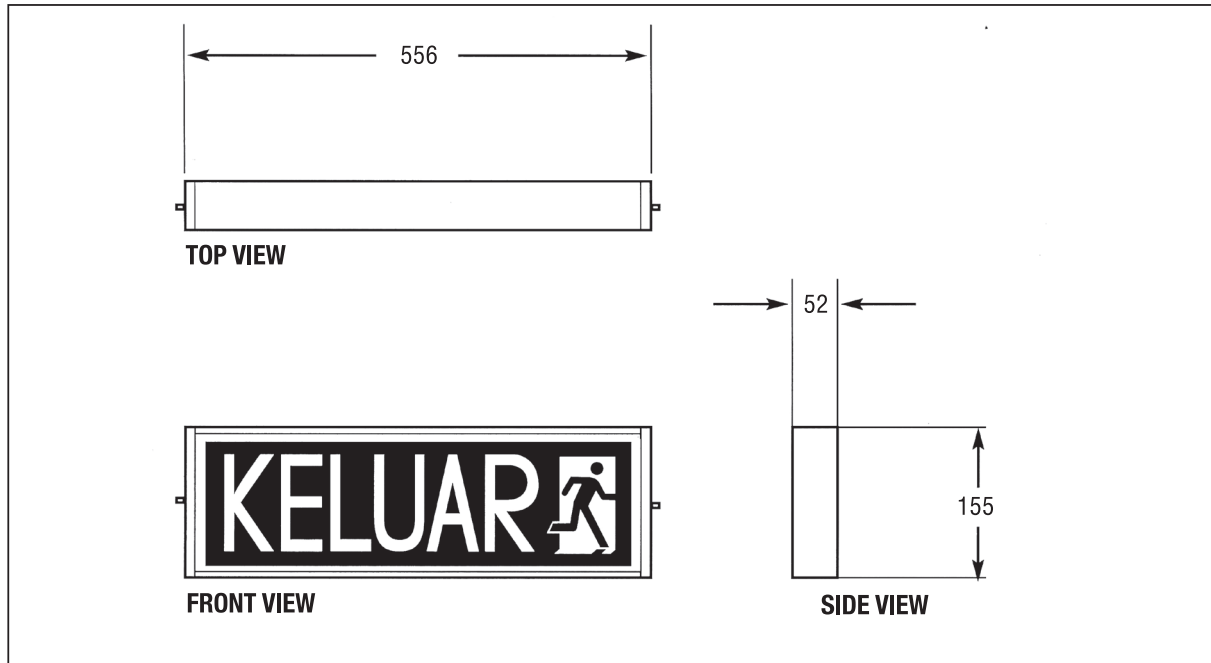

Ordering Guide

Model	PEX-215LED	Legend
Normal (Standard)	PEX-215LED	
Single-side Arrow To Right	PEX-215LED / RA	
Single-side Arrow To Left	PEX-215LED / LA	
Single-side Arrow Straight Ahead	PEX-215LED / SA	
Double-side with Arrow	PEX-215 DLED	

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)
 No. 3, Jalan SS 26/13,
 Taman Mayang Jaya, 47301 Petaling Jaya,
 Selangor Darul Ehsan.
 Tel : (6)03-78037488 (Hunting)
 Fax : (6)03-78038509
 E-mail : sales@pnesys.com.my
 Website : www.pnesys.com.my



Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.