



Self-Contained Emergency Luminaires



3.0W Power LED

PTH-322R



Specifications


MODEL.....	➡	PTH 322R
MODE.....	➡	Non-maintained
WEIGHT.....	➡	~ 600 gram
BATTERY.....	➡	3.6V, 1.6Ah Nickel Metal Hydride (NiMH) Battery
HOUSING.....	➡	ABS + Electro-galvanised sheet steel
CHARGER.....	➡	Constant Current
MOUNTING.....	➡	Ceiling recess mount
DIMENSION.....	➡	Fitting : 41.8mm (H) x 95mm (Ø) Power Pack Module : 260mm (L) x 62mm (W) x 36mm (H)
MONITORING.....	➡	Red LED indicating charging. Equipped with momentary switch to simulate power failure.
COMPLIANCE.....	➡	SIRIM MS 619 : Part 102 : Sect. 102.22, MS IEC 60598-1 : 2003 Jabatan Bomba
LIGHT SOURCE.....	➡	3W COB Power LED
INPUT VOLTAGE.....	➡	240V +/- 10% 50/60Hz
RECHARGE PERIOD.....	➡	16-24 Hours
BACK-UP DURATION.....	➡	3 Hours
BATTERY PROTECTION.....	➡	Low voltage cut-off to prevent battery from over discharging
DEGREE OF PROTECTION.....	➡	IP-20
OPERATING TEMPERATURE.....	➡	0°C to 65°C

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)
 No.3, Jln SS26/13, Taman Mayang Jaya
 47301, Petaling Jaya, Selangor Darul Ehsan.
 Tel : (6)03-78037488 (Hunting)
 Fax : (6)03-78038509
 E-mail : sales@pnesys.com.my
 Website : www.pnesys.com.my

MODEL : PTH 322R

Dimension

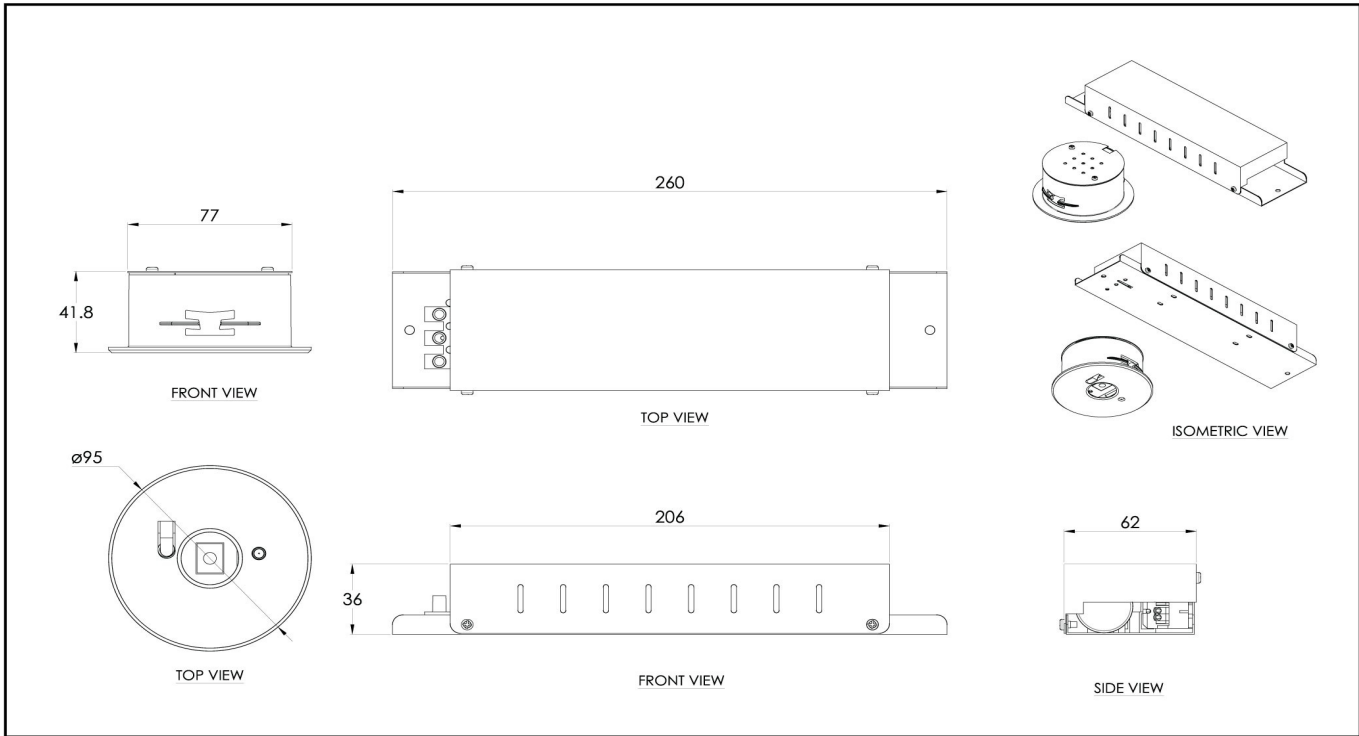

For further enquiries, please contact :-

PNE SYSTEMS SDN. BHD. (263861 D)
No. 3, Jalan SS 26/13,
Taman Mayang Jaya, 47301 Petaling Jaya,
Selangor Darul Ehsan.
Tel : (6)03-78037488 (Hunting)
Fax : (6)03-78038509
E-mail : sales@pnesys.com.my
Website : www.pnesys.com.my



Note : Due to continuous development and improvement, our company reserves the right to change specification without notice.