

S2000




order code


| model | lamp type | lamp holder | order code |
|-------------------------|-----------|-------------|-------------|
| S2000 SY MH 250W (2.1A) | tubular | E40 | S2000-M0250 |
| S2000 SY MH 400W | tubular | E40 | S2000-M0400 |
| S2000 SY HPS 250W | tubular | E40 | S2000-S0250 |
| S2000 SY HPS 400W | tubular | E40 | S2000-S0400 |

note : S2000 asymmetrical type floodlight is available upon request • specifications are subject to change without prior notice

dimension

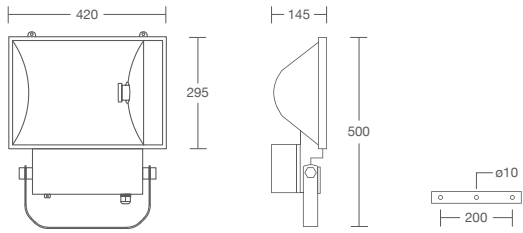

photometric curve

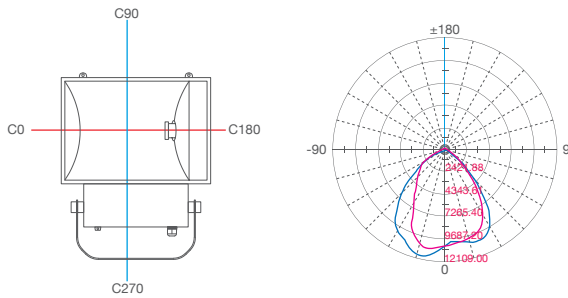

note : photometric result tested based on 32000lm MH 400W clear tube

features

electrical system

- built-in control gear suitable for HID lamps from 250W - 400W

housing

- high pressure aluminium die-cast housing with **AKzo Nobel Interpon** outdoor epoxy powder coating

reflector

- high purity anodized hammered finish aluminium reflector

glass

- thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

compliance and approvals

- degree of protection IEC60529:2001

key for standard order coding

| | | |
|--------------------------|-----------------|--|
| S2000 Sy - M 0400 | capacity code | : example = 400W |
| | lamp type | : S = high pressure sodium : M = metal halide |
| | reflector model | : Sy = symmetrical : Asy = asymmetrical |
| | casing model | |

technical data

- ingress protection • IP65
- voltage • 220 - 240 Vac 50 / 60Hz
- lamp wattage • 250W - 400W
- holder type • E40 ceramic lamp holder
- maximum weight • 9 kg
- colour of housing • black