

# S3000




## order code

model	lamp type	lamp holder	order code
S3000 MH 1000W	tubular	E40	S3000-M1000
S3000 HPS 1000W	tubular	E40	S3000-S1000
accessories	housing material	IP rated	order code
remote control gear (MH 1000W)	steel c/w epoxy powder	IP43	S5100 UC-M1000
remote control gear (HPS 1000W)	steel c/w epoxy powder	IP43	S5100 UC-S1000
remote control gear (MH 1000W)	die-cast aluminium	IP65	S5100 UA-M1000
remote control gear (HPS 1000W)	die-cast aluminium	IP65	S5100 UA-S1000

note : specifications are subject to change without prior notice

## dimension

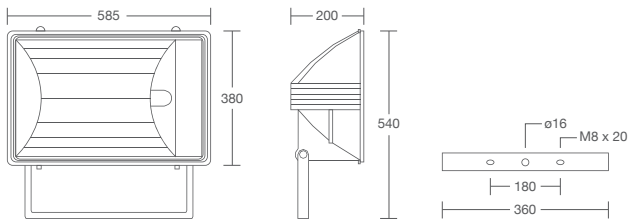

IP43



IP65

## features

### housing

- high pressure aluminium die-cast housing with **AKzo Nobel Interpon** outdoor epoxy powder coating

### reflector

- high purity anodized hammered finish aluminium reflector

### glass

- thermal resistant tempered glass

### mounting bracket

- steel mounting bracket coated with epoxy powder


### lamp holder

- E40 lamp holder conforming to EN / VDE standard

### compliance and approvals

- degree of protection IEC60529:2001


## photometric curve

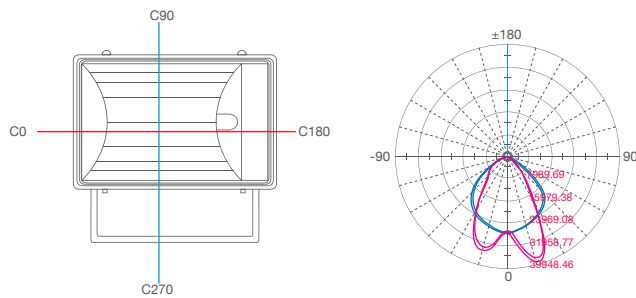


note : photometric result tested based on 85000lm MH 1000W clear tube

## accessories

S5100-UC



S5100-UA

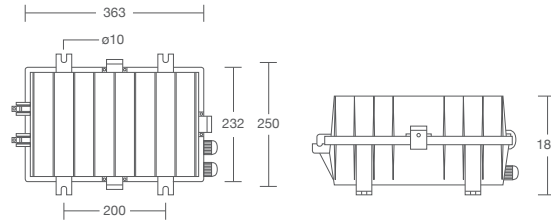

## key for standard order coding



## technical data

- ingress protection • IP65 (lamp fitting)
- voltage • 220 - 240 Vac 50 / 60Hz
- lamp wattage • MH 1000W & HPS 1000W
- holder type • E40 ceramic lamp holder
- floodlight maximum weight • 11.6 kg
- control gear maximum weight • S5100-M1000 : 14 kg / S5100-S1000 : 15.5 kg
- colour of housing • black