


## DS-7204/7208/7216HVI-SV 960H DVR

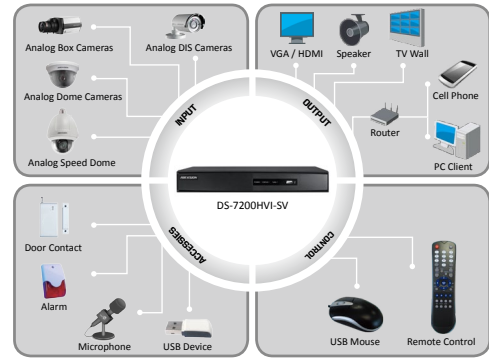

### Key features

- H.264 video compression
- CIF resolution real-time recording
- Up to WD1(960\*576) resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- Dual-stream
- Up to 4/8/16-ch synchronous playback
- NTP, SMTP, NFS, UPnP and iSCSI protocols

### Rear Panel of DS-7216HVI-SV



1. Video in
2. Video out
3. USB interface
4. HDMI interface
5. VGA interface
6. Audio in, RCA connector
7. Audio out, RCA connector
8. LAN network interface
9. RS-485 serial interface
10. 12VDC power input
11. Power switch
12. GND

### Specifications

	DS-7204HVI-SV	DS-7208HVI-SV	DS-7216HVI-SV
<b>Video/Audio input</b>			
Video compression	H.264		
Video input	4-ch	8-ch	16-ch
Video input interface	BNC (1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive		
Audio compression	G.711u		
Audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)		
<b>Video/Audio output</b>			
HDMI / VGA output	1-ch, resolution: 1080P: 1920×1080/60Hz; SXGA: 1280×1024/60Hz; 720P: 1280×720/60Hz; XGA: 1024×768/60Hz		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
Encoding resolution	WD1 / 4CIF / 2CIF / CIF / QCIF		
Frame rate	WD1 / 4CIF / 2CIF @ 12 fps(P) / 15 fps(N); CIF / QCIF @ 25 fps (P) / 30 fps (N)	WD1 / 4CIF / 2CIF @ 15 fps; CIF / QCIF @ 25 fps (P) / 30 fps (N)	WD1 @ 8 fps; 4CIF / 2CIF @ 10 fps; CIF / QCIF @ 25 fps (P) / 30 fps (N)
Video bit rate	32 Kbps ~ 3072 Kbps, or user defined (Max. 3072 Kbps)		
Audio output	1-ch, RCA (Linear, 1 kΩ)		
Audio bit rate	64 Kbps		
Dual-stream	Support; Sub-stream @ CIF / QCIF		
Stream type	Video, Video & Audio		
Synchronous playback	4-ch	8-ch	16-ch
<b>Hard disk</b>			
SATA	1 SATA interface		
Capacity	Up to 4TB capacity		
<b>External interface</b>			
Network interface	1, RJ45 10M / 100M Ethernet interface		
Serial interface	1 RS-485 interface, half-duplex		
USB interface	2, USB2.0		
<b>General</b>			
Power supply	12 VDC		
Consumption	≤ 10 W	≤ 10 W	≤ 15 W
Working temperature	-10 °C ~ +55 °C		
Working humidity	10% ~ 90%		
Chassis	Standalone 1U chassis		
Dimensions (W × D × H)	315 × 230 × 45 mm		
Weight	≤ 2 kg (without hard disk or DVD-RW)		