


Panasonic



Advanced Hybrid System Feature Guide

Model No. **KX-TEB308**



Thank you for purchasing a Panasonic Advanced Hybrid System.
Please read this manual carefully before using this product and save this manual for future use.

Introduction

About this Feature Guide

The Feature Guide is designed to serve as an overall reference describing the features of the Panasonic Advanced Hybrid System.

It explains what the PBX can do, as well as how to obtain the most of its many features and facilities.

The Feature Guide is divided into the following sections:

Section 1, Call Handling Features

Describes the features of the PBX related to making and receiving calls, and operating telephones.

Section 2, System Configuration and Administration Features

Describes the features that allow the PBX to be configured and administered to suit the needs of its users.

Section 3, Programming Instructions

Serves as an overall system programming reference for the PBX.

Section 4, Appendix

Provides tables that describe the resource capacity of the PBX, as well as its different tones and ring tones.

Index

References Found in the Feature Guide

Installation Manual References

The Installation Manual provides instructions detailing the installation and maintenance of the PBX.

Sections from the Installation Manual are listed throughout the Feature Guide for your reference.

Feature Guide References

Related sections of the Feature Guide are listed for your reference.

User Manual References

The User Manual describes how users can access commonly used PBX features and functions with their proprietary telephones (PTs), single line telephones (SLTs), and Direct Station Selection (DSS) Consoles.

Sections from the User Manual are listed throughout the Feature Guide for your reference.

PT Programming References

Commonly used settings can be programmed using a display PT (→ 2.3.2 PT Programming). These PT programming items are noted throughout the Feature Guide for your reference by title and programme number. The following is an example of a PT Programming reference:

"Idle extensions are automatically searched for according to a preprogrammed hunting type (→ Hunting Type [101])."

Links to Other Pages and Manuals

If you are viewing this Feature Guide with a PC, certain items are linked to different sections of the Feature Guide and other PBX manuals. Click on a link to jump to that section.

Linked items include:

-
- Installation Manual References
 - Feature Guide References
 - User Manual References
 - PT Programming References

Notes

- Certain PTs, features, and optional service cards are not available in some areas. Consult your certified Panasonic dealer for more information.
- Every system programming setting can be accessed using a PC and the Panasonic KX-TEB308 Maintenance Console software (→ 2.3.1 PC Programming). For programming details, refer to the on-line help that is installed along with KX-TEB308 Maintenance Console (→ 3.2.1 Installing and Starting KX-TEB308 Maintenance Console).

Trademarks

- Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- Celeron and Intel are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.
- All other trademarks identified herein are the property of their respective owners.

List of Abbreviations

A	AA	→	Automated Attendant
	APT	→	Analogue Proprietary Telephone
	ARS	→	Automatic Route Selection
B	BGM	→	Background Music
	BSS	→	Busy Station Signalling
C	COS	→	Class of Service
	CPC	→	Calling Party Control
D	DIL	→	Direct In Line
	DISA	→	Direct Inward System Access
	DND	→	Do Not Disturb
	DRD	→	Distinctive Ring Detection
	DSS	→	Direct Station Selection
	DTMF	→	Dual Tone Multi-Frequency
E	EFA	→	External Feature Access
F	FWD	→	Call Forwarding
G	G-CO	→	Group-CO
I	IRNA	→	Intercept Routing—No Answer
L	LCS	→	Live Call Screening
	LED	→	Light Emitting Diode
O	O-CO	→	Other-CO
	OGM	→	Outgoing Message
P	PF	→	Programmable Feature
	PSTN	→	Public Switched Telephone Network
	PT	→	Proprietary Telephone
S	S-CO	→	Single-CO
	SLT	→	Single Line Telephone
	SMDR	→	Station Message Detail Recording
	SMS	→	Short Message Service
T	TAM	→	Telephone Answering Machine
	TRS	→	Toll Restriction
U	UCD	→	Uniform Call Distribution
V	VM	→	Voice Mail
	VPS	→	Voice Processing System

Feature Highlights

Fixed Line SMS Terminal Support (Optional Caller ID card required)

The PBX can relay incoming calls from a Short Message Service (SMS) centre to specific single line telephones (SLTs) that support SMS. Fixed Line SMS is a service that allows text messages to be sent and received via Public Switched Telephone Network (PSTN) access. We recommend using SMS-enabled Panasonic SLTs (→ 1.17.3 Fixed Line SMS Terminal Support).

Caller ID Display on SLT (Optional Caller ID card required)

The PBX can receive Caller ID information (telephone numbers and callers' names) from calls received on outside (CO) lines. This information can be shown on the displays of SLTs that support Caller ID as well as proprietary telephones (PTs) when receiving calls (→ 1.16.1 Caller ID).

3-level Automated Attendant (AA)

3-level Automated Attendant (AA) service allows a caller to dial a single-digit number (Direct Inward System Access [DISA] AA number) following the guidance of 3-level DISA outgoing messages (OGMs), and be connected to the desired party automatically (→ 1.15.6 Direct Inward System Access (DISA)).

PC Programming

System programming settings can be accessed using a PC and the Panasonic KX-TEB308 Maintenance Console software as well as by using a PT (→ 2.3.1 PC Programming).

The PBX software can be upgraded via the Serial Interface (RS-232C port) or USB port, using the KX-TEB308 Maintenance Console software (→ 2.3.7 Firmware Upgrade).

Automatic Configuration for Outside (CO) Line Type

The dialling mode of connected outside (CO) lines is automatically configured the first time the PBX is accessed with a PC using the KX-TEB308 Maintenance Console software, or after the PBX data has been cleared (→ 2.3.5 Automatic Configuration for Outside (CO) Line Type).

Advanced Hybrid System

This PBX supports the connection of PTs^{*1}, Direct Station Selection (DSS) Consoles, and single line devices such as SLTs, fax machines, wireless telephones, and data terminals.

^{*1} In this manual, "proprietary telephone" ("PT") means an analogue proprietary telephone (APT).

Table of Contents

1	Call Handling Features.....	13
1.1	Incoming Call Features.....	14
1.1.1	Incoming Outside (CO) Line Call Features	14
1.1.1.1	Direct In Line (DIL)	14
1.1.1.2	Intercept Routing	15
1.1.2	Internal Call Features	16
1.1.3	Incoming Call Indication Features	17
1.1.3.1	Incoming Call Indication Features—OVERVIEW.....	17
1.1.3.2	Outside (CO) Line Ringing Selection.....	18
1.1.3.3	Ring Tone Pattern Selection	19
1.1.3.4	Distinctive Ring Detection (DRD) for New Zealand	20
1.1.3.5	Call Waiting	22
1.2	Receiving Group Features	23
1.2.1	Idle Extension Hunting	23
1.2.2	Uniform Call Distribution (UCD)	25
1.2.3	Direct Inward System Access (DISA) Ring	28
1.2.4	Log-in/Log-out	29
1.3	Call Forwarding (FWD)/Do Not Disturb (DND) Features	30
1.3.1	Call Forwarding (FWD)/Do Not Disturb (DND).....	30
1.3.1.1	Call Forwarding (FWD)/Do Not Disturb (DND)—OVERVIEW.....	30
1.3.1.2	Call Forwarding (FWD).....	31
1.3.1.3	Do Not Disturb (DND).....	34
1.4	Answering Features.....	35
1.4.1	Answering Features	35
1.4.1.1	Answering Features—OVERVIEW	35
1.4.1.2	Line Preference—Incoming	36
1.4.1.3	Call Pickup.....	37
1.4.1.4	Hands-free Answerback	38
1.5	Making Call Features	39
1.5.1	Intercom Call Features.....	39
1.5.1.1	Intercom Call	39
1.5.2	Outside (CO) Line Call Features	41
1.5.2.1	Outside (CO) Line Call Features—OVERVIEW.....	41
1.5.2.2	Emergency Call	42
1.5.2.3	Account Code Entry	43
1.5.2.4	Dial Type Selection	44
1.5.2.5	Reverse Circuit	45
1.5.2.6	Pause Insertion.....	46
1.5.2.7	Host PBX Access Code (Access Code to the Telephone Company from a Host PBX)	47
1.5.3	Seizing a Line Features	49
1.5.3.1	Seizing a Line Features—OVERVIEW	49
1.5.3.2	Line Preference—Outgoing	50
1.5.3.3	Outside (CO) Line Access	51
1.6	Memory Dialling Features	53
1.6.1	Memory Dialling Features	53
1.6.1.1	Memory Dialling Features—OVERVIEW	53
1.6.1.2	One-touch Dialling.....	55
1.6.1.3	KX-T7710 One-touch Dialling.....	56
1.6.1.4	Redial	57
1.6.1.5	Speed Dialling—Personal/System.....	58
1.6.1.6	Quick Dialling.....	59
1.6.1.7	Hot Line	60

1.7	Busy Line/Busy Party Features.....	61
1.7.1	Automatic Callback Busy (Camp-on).....	61
1.7.2	Executive Busy Override	62
1.7.3	Call Waiting Tone.....	63
1.8	Toll Restriction (TRS) Features	64
1.8.1	Toll Restriction (TRS).....	64
1.8.2	Toll Restriction (TRS) Override by Account Code	68
1.8.3	Extension Lock	70
1.8.4	Walking COS	71
1.9	Automatic Route Selection (ARS) Features.....	72
1.9.1	Automatic Route Selection (ARS)	72
1.10	Conversation Features.....	78
1.10.1	Hands-free Operation	78
1.10.2	Room Monitor	79
1.10.3	Microphone Mute.....	80
1.10.4	Headset Operation	81
1.10.5	Data Line Security	82
1.10.6	Flash/Recall.....	83
1.10.7	External Feature Access (EFA)	84
1.10.8	Outside (CO) Line Call Limitation.....	85
1.10.9	Paralleled Telephone	86
1.10.10	Calling Party Control (CPC) Signal Detection	87
1.11	Transferring Features.....	88
1.11.1	Call Transfer.....	88
1.12	Holding Features	90
1.12.1	Call Hold.....	90
1.12.2	Call Park.....	92
1.12.3	Call Splitting.....	93
1.12.4	Music on Hold.....	94
1.12.5	Consultation Hold	95
1.13	Conference Features	96
1.13.1	Conference Features	96
1.13.1.1	Conference Features—OVERVIEW.....	96
1.13.1.2	Conference	97
1.14	Paging Features.....	99
1.14.1	Paging	99
1.15	Optional Device Features	100
1.15.1	Doorphone Call	100
1.15.2	Door Open.....	101
1.15.3	Doorbell/Door Chime	102
1.15.4	Background Music (BGM)	104
1.15.5	Outgoing Message (OGM) for DISA/UCD	105
1.15.6	Direct Inward System Access (DISA)	106
1.16	Caller ID Features	114
1.16.1	Caller ID.....	114
1.16.2	Incoming Call Log.....	118
1.17	Message Features	121
1.17.1	Message Waiting	121
1.17.2	Absent Message.....	123
1.17.3	Fixed Line SMS Terminal Support.....	124
1.18	Proprietary Telephone (PT) Features.....	128

1.18.1	Fixed Buttons	128
1.18.2	Flexible Buttons.....	130
1.18.3	LED Indication.....	132
1.18.4	Display Information.....	134
1.19	Voice Mail Features	136
1.19.1	Voice Mail APT Integration	136
1.19.2	Voice Mail Inband (DTMF) Integration.....	141
1.20	Administrative Information Output Features.....	144
1.20.1	Station Message Detail Recording (SMDR).....	144
1.20.2	Call Log Printout for Each Extension	149
1.21	Extension Controlling Features	150
1.21.1	Extension Feature Clear	150
1.21.2	Timed Reminder.....	151
1.22	Audible Tone Features	152
1.22.1	Dial Tone	152
1.22.2	Confirmation Tone	153
2	System Configuration and Administration Features	155
2.1	System Configuration—Hardware.....	156
2.1.1	Extension Jack Configuration.....	156
2.2	System Configuration—Software	157
2.2.1	Class of Service (COS).....	157
2.2.2	Group	158
2.2.3	Time Service	160
2.2.4	Operator/Manager Features.....	163
2.3	System Data Control.....	165
2.3.1	PC Programming.....	165
2.3.2	PT Programming	168
2.3.3	Automatic Time Adjustment	170
2.3.4	Feature Numbering	171
2.3.5	Automatic Configuration for Outside (CO) Line Type	176
2.3.6	Country Setting	177
2.3.7	Firmware Upgrade	178
2.4	Fault Recovery/Diagnostics	179
2.4.1	Power Failure Transfer.....	179
2.4.2	Power Failure Restart.....	180
3	Programming Instructions.....	181
3.1	Introduction	182
3.1.1	Introduction	182
3.2	PC Programming	183
3.2.1	Installing and Starting KX-TEB308 Maintenance Console.....	183
3.3	PT Programming	184
3.3.1	Programming Instructions	184
3.3.2	Programming Procedures	189
	Date & Time [000].....	189
	System Speed Dialling Number [001].....	189
	System Password [002]	190
	DSS Console Jack Assignment [003].....	191
	Console Paired Telephone [004].....	191
	One-touch Transfer Using a DSS Button [005].....	191
	Time Service Switching Mode [006]	192

Time Service Start Time [007]	192
Operator Assignment [008]	192
Extension Number [009]	193
LCD Time Display [010]	193
System Speed Dialling Name [011]	194
Second Feature Numbering Plan [012]	194
KX-T7710 One-touch Dialling [013]	195
Hunting Group Set [100]	195
Hunting Type [101]	195
DTMF Integration Port [102]	196
DTMF Integration [103]	196
SLT Hold Mode [104]	196
Conference Tone [105]	196
External Pager Access Tone [106]	197
DTMF Receiver Check [107]	197
Flash/Recall Mode for a Locked Extension [108]	197
CO Indicator [109]	197
Flash/Recall Key Mode [110]	197
Music on Hold [111]	198
DSS Lamp Mode [112]	198
Automatic Redial Repeat Count [113]	198
Automatic Redial Interval [114]	198
Extension Ring Tone Pattern [115]	199
Conference Pattern [116]	199
Call Pickup Tone [117]	199
Pulse Restriction [118]	199
Redialling after Pulse to Tone Conversion [119]	200
Bell Frequency [120]	200
Automatic Line Access [121]	200
Automatic Rotation for CO Line Access [122]	200
Break Ratio [123]	200
TRS Check for * and # [125]	201
DSS Off-hook Mode [126]	201
Pickup Group [127]	201
Ringback Tone Pattern [128]	201
VM 1 APT Port [130]	202
SLT Ring/Silence Ratio [142]	202
SLT Ring Bell-on Time [143]	202
SMS Centre Number for Receiving [145]	203
SMS Routing Table—CO [146]	203
SMS Routing Table—Extension [147]	203
SLT Caller ID Signalling Type [150]	203
SLT Caller ID Line Access Number [151]	204
Automatic Time Adjustment [152]	204
Incoming Reverse [153]	204
Hold Recall Time [200]	204
Transfer Recall Time [201]	204
Call Forwarding Start Time [202]	205
Hot Line Waiting Time [203]	205
Call Duration Counter Start [204]	205
CO-to-CO Line Call Duration [205]	205
Dialling Start Time [206]	205
Hookswitch Flash Timing Range [207]	206
Inter-digit Time [208]	206
DTMF Time [210]	206
No Dial Disconnection [211]	206
Extension-to-CO Line Call Duration [212]	207
Bell-off Detection [213]	207
Carrier Exception Code [300]	207
TRS—System Speed Dialling Class [301]	207

TRS—COS 2-5 Denied Code [302-305].....	208
TRS—Exception Code [306]	208
Emergency Number [309].....	208
Account Code [310].....	209
Automatic Pause Insertion Code [311]	209
TRS—Extension Lock Class [312]	209
ARS Selection [350]	210
Route 1-4 Selection Code [351-354]	210
Route 1-4 Exception Code [355-358]	210
1st Carrier Selection Code [359]	210
ARS Modification—Removed Digits [360]	211
ARS Modification—Added Number [361]	211
ARS Dial Tone [362]	211
ARS Inter-digit Time [363]	211
ARS CO Line Group [364].....	212
Route 1-4 Authorisation Code [381-384]	212
Route 1-4 Itemised Billing [385-388]	212
Itemised Billing Code [389].....	213
Authorisation and Itemised Billing Code Order [390].....	213
CO Line Connection [400]	213
Dial Mode [401]	214
Pulse Speed [402]	214
Host PBX Access Code [403].....	214
CO Line Group Number [404].....	215
Flexible Outward Dialling—Day/Night/Lunch [405-407].....	215
Flexible Ringing—Day/Night/Lunch [408-410].....	216
Delayed Ringing—Day/Night/Lunch [411-413].....	216
CO Line Mode—Day/Night/Lunch [414-416]	217
Pause Time [417]	218
Flash/Recall Time [418].....	218
Automatic Designated Line Access [419]	218
CPC Signal Detection—Incoming [420].....	219
CPC Signal Detection—Outgoing [421].....	219
Disconnect Time [422].....	219
CO Line Ring Tone Pattern [423].....	220
Polarity Reverse Detection [424]	220
Collect Call Block [425] (Brazil only).....	221
Distinctive Ring Detection (DRD) [426] (New Zealand only)	221
DRD Ring Pattern 2 Extension Assignment—Day/Night/Lunch [427-429] (New Zealand only).....	222
DRD Ring Pattern 3 Extension Assignment—Day/Night/Lunch [430-432] (New Zealand only).....	222
DRD Pattern 2 and 3 Ring Tone [433-434] (New Zealand only).....	223
DISA Incoming Call Dial Mode [500]	223
DISA Built-in AA [501]	223
FAX Connection [503].....	224
DISA Delayed Answer Time [504]	224
DISA Wait Time after OGM [505]	224
DISA Busy Mode [506]	224
DISA Intercept Mode [507]	225
DISA Ring Time before Intercept [508].....	225
DISA Ring Time after Intercept [509].....	225
DISA No Dial Mode [510]	225
DISA Security Mode [511]	226
DISA Security Code [512]	226
Cyclic Tone Detection [513]	227
FAX Tone Detection [514].....	227
Intercept Time for Internal DISA [515]	227
DISA Incoming Assignment [516].....	227
DISA AA Wait Time [517]	227
DISA Tone after Security Code [518].....	228
OGM Mute Time [519].....	228

UCD Group [520]	228
UCD Busy Waiting Time [521]	228
UCD OGM Message Interval Time [522]	228
UCD Busy Mode [523]	229
UCD Intercept Mode [524]	229
UCD Ring Time before Intercept [525]	229
UCD Ring Time after Intercept [526]	229
UCD Waiting Message [527]	229
DISA Security Code Digits [530]	230
DISA Ringback Tone [531]	230
3-level AA Assignment [540-549]	230
Clear All OGMs of DISA/UCD [599]	231
Extension Group [600]	231
TRS-COS—Day/Night/Lunch [601-603]	231
Extension Name [604]	232
Account Code Mode [605]	232
Call Transfer to CO Line [606]	232
Call Forwarding to CO Line [607]	233
Executive Busy Override [608]	233
DND Override [609]	233
Parallelled Telephone [610]	234
TAM Extension [611]	234
Room Monitor [612]	234
CO Line Call Duration Limitation [613]	235
Internal Pulse Detection [614]	235
LCD Language [615]	235
Extension Name in Cyrillic [616]	236
Message Waiting for Another Extension [618]	236
SLT Message Waiting [619]	237
LCS Recording Mode Set [620]	237
BGM Control for APT [626]	238
SLT Ring Wait Time for New Call [627]	238
SLT Caller ID [628]	238
SLT Fixed Bell Pattern [629]	239
Doorphone Ringing—Day/Night/Lunch [700-702]	239
Door Opener—Day/Night/Lunch [703-705]	240
Doorphone Ring Tone Pattern [706]	240
Doorphone Access Tone [707]	241
Doorphone Ring Time [708]	241
Door Open Duration [709]	241
Doorphone Ring/Chime [710]	242
Doorphone Chime Assignment [711]	242
Doorphone Chime Pattern [712]	242
SMDR RS-232C Parameter [800]	243
SMDR Parameter [801]	243
Incoming/Outgoing Call Selection for Printing [802]	243
Secret Number SMDR Print Suppression [803]	244
System Data Dump [804]	244
SMDR Account Code [805]	245
SMDR Language [806]	245
Caller ID [900]	245
Caller ID Area Code [901]	246
Caller ID Modification for Local Calls [902]	246
Caller ID Modification for Long-distance Calls [903]	246
Caller ID Log Priority [904]	247
Caller ID Automatic 0 Addition [905]	247
Caller ID SMDR Format [906]	247
Caller ID SMDR Printout [907]	247
Common Area Call Log Check [909]	248
Caller ID Type [910]	248

Call Log Next Page [927]	248
SMDR Mode for Printing [929]	248
Call Forwarding Selection [963].....	249
TRS Check after Answering [966]	249
TRS Check Time after Answering [967]	249
KX-T7700 Series Incoming Lamp Control [968]	250
Country [995]	250
Firmware Version [998].....	250
System Data Clear [999]	250
4 Appendix	253
4.1 Capacity of System Resources.....	254
4.1.1 Capacity of System Resources	254
4.2 Tones/Ring Tones.....	256
4.2.1 Tones/Ring Tones.....	256
Index	263

Section 1

Call Handling Features

1.1 Incoming Call Features

1.1.1 Incoming Outside (CO) Line Call Features

1.1.1.1 Direct In Line (DIL)

Description

Directs incoming outside (CO) line calls to a preprogrammed destination based on the outside (CO) line carrying the call. Each outside (CO) line can have a different destination for each time service mode.

[Programming Example]

The table can be programmed for each outside (CO) line.

Outside (CO) Line No.	Distribution method and destination*					
	Day		Lunch		Night	
1	DIL	101	DIL	102	DIL	102
2	DIL	103	DIL	103	DIL	103
3	Normal	—	Normal	—	Normal	—

* → CO Line Mode—Day/Night/Lunch [414-416]

In this example:

If an outside (CO) line call is received on outside (CO) line 1:

- a) In day mode: Direct In Line (DIL) distribution is assigned. The call is routed to its DIL destination, extension 101.
- b) In lunch/night mode: DIL distribution is assigned. The call is routed to its DIL destination, extension 102.

Conditions

- To use this feature, "DIL" must be selected as the distribution method for the desired outside (CO) line port. When "Normal" is selected, an incoming outside (CO) line call is received at the extensions assigned in Flexible Ringing—Day/Night/Lunch [408-410].
- This outside (CO) line can be used by multiple extension users to make calls, but can only be used by a single extension to receive calls.
- If a DIL destination is an extension within an extension group that has enabled the Idle Extension Hunting feature and it is busy, the Idle Extension Hunting feature becomes active (→ 1.2.1 Idle Extension Hunting).

Feature Guide References

2.2.3 Time Service

1.1.1.2 Intercept Routing

Description

Redirects incoming outside (CO) line calls via the Direct Inward System Access (DISA) or Uniform Call Distribution (UCD) feature to a preprogrammed destination when the original destination does not, or cannot, answer the call. There are 2 types of Intercept Routing, described below.

Type	Description
No Dial	While or after hearing a DISA outgoing message (OGM) or after hearing a dial tone (short beep), if the caller does not dial anything or enters an unrecognised input, the call is redirected to preprogrammed intercept destinations (→ Flexible Ringing—Day/Night/Lunch [408-410]).
Intercept Routing—No Answer (IRNA)	If a called party does not answer a call within a preprogrammed time period (→ DISA Ring Time before Intercept [508], UCD Ring Time before Intercept [525]), the call is redirected to preprogrammed intercept destinations (→ Flexible Ringing—Day/Night/Lunch [408-410]).

Feature Guide References

- 1.2.2 Uniform Call Distribution (UCD)
- 1.15.6 Direct Inward System Access (DISA)

1.1.2 Internal Call Features

Description

There are 2 types of internal calls, described below.

Feature	Description	Details in
Intercom Call	A call from one extension to another.	• 1.5.1.1 Intercom Call
Doorphone Call	A call made from a doorphone to its preprogrammed destination for the current time service mode, assigned to the doorphone's port (→ 2.2.3 Time Service).	• 1.15.1 Doorphone Call

1.1.3 Incoming Call Indication Features

1.1.3.1 Incoming Call Indication Features—OVERVIEW

Description

Extension telephones can indicate an incoming call in various ways, described below.

Indication Type	Feature	Description	Details in
Ring/No Ring	Outside (CO) Line Ringing Selection	Each extension can be programmed to ring or not ring when receiving an outside (CO) line call.	• 1.1.3.2 Outside (CO) Line Ringing Selection
Ring Tone	Ring Tone Pattern Selection	A telephone rings when receiving a call. A different ring tone pattern can be assigned to each incoming call type.	• 1.1.3.3 Ring Tone Pattern Selection
Voice-calling	Alternate Receiving—Ring/Voice	Proprietary telephone (PT) users can choose how their telephones receive intercom calls, by selecting to hear ring tones or the caller's voice.	• 1.5.1.1 Intercom Call
LED (Light Emitting Diode)	LED Indication	The LED indicators on a PT can indicate the status of different lines using light patterns and colours.	• 1.18.3 LED Indication
Display (Caller Information)	Display Information	A user's PT can show a variety of information on the display, such as the outside (CO) line number, the caller's name and number, the extension number and name of the calling extension after the call is forwarded, etc.	• 1.18.4 Display Information
Tone During a Conversation	Call Waiting	When an extension user is in the middle of a call, the user can be alerted to a new call by a call waiting tone.	• 1.1.3.5 Call Waiting

1.1.3.2 Outside (CO) Line Ringing Selection

Description

An extension user can select whether the telephone will ring or not when receiving call(s) from assigned or all outside (CO) lines through personal programming.

Conditions

- System programming determines which extension(s) will ring for incoming outside (CO) line calls in each time service mode (→ Flexible Ringing—Day/Night/Lunch [408-410]).
- If an outside (CO) line call reaches a user's extension, but the extension is set to not ring, the CO button will flash. The outside (CO) line call can be answered by pressing the flashing CO button.

User Manual References


3.1.2 Changing Personal Settings Using Programming Mode

1.1.3.3 Ring Tone Pattern Selection

Description

A different ring tone pattern can be assigned to each incoming call type, such as intercom calls (→ Extension Ring Tone Pattern [115]), calls from each doorphone (→ Doorphone Ring Tone Pattern [706]), and calls from each outside (CO) line (→ CO Line Ring Tone Pattern [423]). Available ring tone patterns are as follows:

[Ring Tone Patterns]

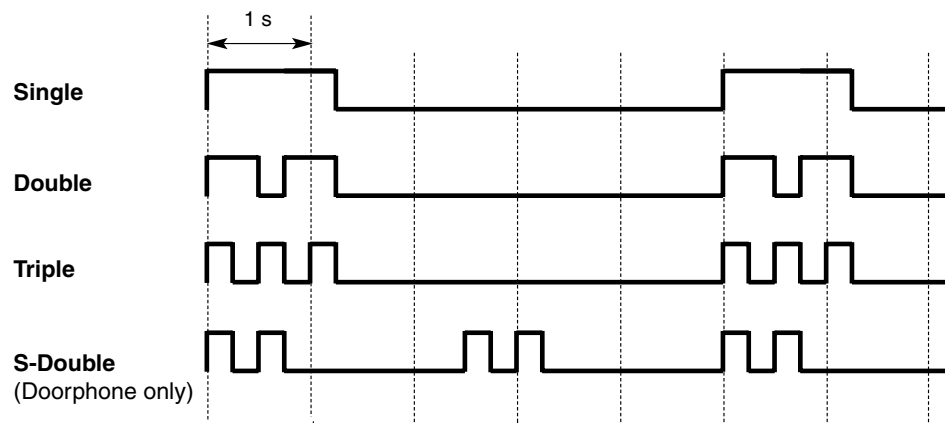

Conditions

- The ring tone pattern for incoming calls (intercom calls and outside (CO) line calls) to a single line telephone (SLT) can be fixed to "Single" or "Double" for each extension through system programming (→ SLT Fixed Bell Pattern [629]). The length of the ring tone pattern depends on the preprogrammed length of the bell-on signal (→ SLT Ring Bell-on Time [143]), combined with the ratio between the bell signals of the SLT (→ SLT Ring/Silence Ratio [142]). Depending on the type of SLT being used, the SLT may not ring properly, if the ring tone pattern of the SLT is set differently from that used by the telephone company.

Feature Guide References

- 1.1.3.2 Outside (CO) Line Ringing Selection
- 4.2.1 Tones/Ring Tones


1.1.3.4 Distinctive Ring Detection (DRD) for New Zealand

Description

Distinctive Ring Detection (DRD) is only available in New Zealand.

The PBX can detect the following 4 ring tone patterns sent from the telephone company for each outside (CO) line. When the PBX detects one of the ring tone patterns, the call will be transferred to the preprogrammed destination(s) automatically according to system programming. In addition, the extension ring tone pattern for the detected call can be assigned through system programming as shown below.

[Ring Tone Patterns Sent from the Telephone Company]

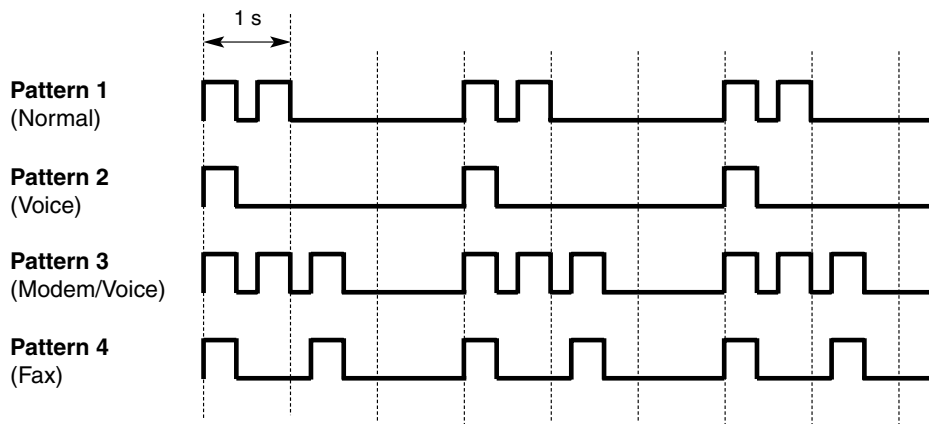

Pattern	Destination assigned in	Ring Tone Pattern assigned in
1	Flexible Ringing—Day/Night/Lunch [408-410], or sent to the Direct Inward System Access (DISA) line or Uniform Call Distribution (UCD) group	CO Line Ring Tone Pattern [423]
2	DRD Ring Pattern 2 Extension Assignment—Day/Night/Lunch [427-429] (New Zealand only)	DRD Pattern 2 and 3 Ring Tone [433-434] (New Zealand only)
3	DRD Ring Pattern 3 Extension Assignment—Day/Night/Lunch [430-432] (New Zealand only)	DRD Pattern 2 and 3 Ring Tone [433-434] (New Zealand only)
4	FAX Connection [503]	CO Line Ring Tone Pattern [423]

Conditions

- To use this feature, "UCD", "DISA", or "Normal" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]) and DRD must be enabled (→ Distinctive Ring Detection (DRD) [426] (New Zealand only)).

Feature Guide References

1.2.2 Uniform Call Distribution (UCD)

1.15.6 Direct Inward System Access (DISA)

4.2.1 Tones/Ring Tones

1.1.3.5 Call Waiting

Description

A busy extension user can be alerted to a new call by Call Waiting. The busy extension user can then answer the second call either by disconnecting the current call or placing it on hold.

If Call Waiting is enabled, a call waiting tone will be sent to the user under the following conditions:

- a) When an outside (CO) line call or a doorphone call is received, or
- b) When another extension executes the Busy Station Signalling (BSS) feature.

If disabled, a reorder tone will be sent to the extension that executed the BSS feature.

Call Waiting from the Telephone Company

Besides the Call Waiting feature provided by the PBX, you can also subscribe to your telephone company's Call Waiting service and receive call waiting tones through the telephone company's lines. This feature is available when an extension is in a conversation with an outside party, and a call is received from another outside party on the same outside (CO) line. The external call waiting tone will alert an extension user of the incoming outside (CO) line call that is waiting. The user can answer the second call by disconnecting the current call or placing it on hold. If a call waiting tone is heard but the corresponding CO button does not flash, this tone is an external call waiting tone from the telephone company. For details, consult your telephone company.

Conditions

- **Data Line Security**
When an extension user activates Data Line Security, Call Waiting is turned off (→ 1.10.5 Data Line Security).
- **Call Waiting Tone**
A proprietary telephone (PT) user can select the preferred call waiting tone through personal programming (Call Waiting Tone Type Selection).
- **Caller ID Information**
When an extension receives a call waiting tone, the caller's information will flash on the display for 5 seconds at 15-second intervals.

Feature Guide References

- 1.7.3 Call Waiting Tone
- 4.2.1 Tones/Ring Tones

User Manual References

- 1.2.4 When the Dialed Party is Busy or There is No Answer
- 1.4.4 Answering Call Waiting
- 1.7.3 Receiving Call Waiting
- 3.1.2 Changing Personal Settings Using Programming Mode



1.2 Receiving Group Features

1.2.1 Idle Extension Hunting

Description

If a called extension is busy, Idle Extension Hunting redirects the call to an idle member of the same extension group, if that group has been assigned as an idle extension hunting group through system programming (→ Hunting Group Set [100]). Idle extensions are automatically searched for according to a preprogrammed hunting type (→ Hunting Type [101]).

This feature is also known as Station Hunting.

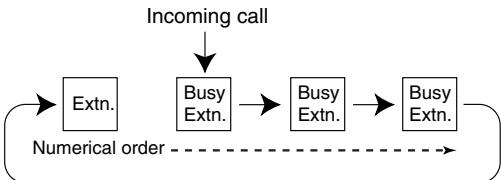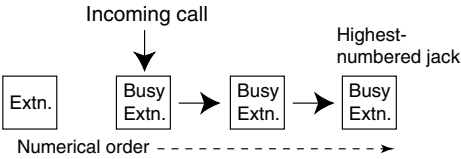Type	Description
Circular Hunting	<p>An idle extension is searched for in a circular fashion one time according to the numerical order of the jacks.</p> 
Terminated Hunting	<p>An idle extension is searched for in the numerical order of the jacks, until reaching the extension that is connected to the highest-numbered jack in the group.</p> 

Conditions

- **Idle Extension Hunting applies to:**
Intercom calls and outside (CO) line calls directed to a single extension.
- An extension can belong to only one extension group (→ Extension Group [600]). One hunting type can be programmed for each extension group.
- If all the searched extensions in an idle extension hunting group are busy, a busy tone will be heard at the extension that made the intercom call (including Direct Inward System Access [DISA] calls).
- A user can leave an idle extension hunting group temporarily by logging out of the group, and rejoin the group by logging back in (→ 1.2.4 Log-in/Log-out).
- **FWD/DND Mode**
When searching for an idle extension within an idle extension hunting group, any extension that has set FWD, DND, or Log-out will be skipped (→ 1.3.1 Call Forwarding (FWD)/Do Not Disturb (DND)). However, if the extension that receives the call first has set FWD or DND, Idle Extension Hunting will

1.2 Receiving Group Features

not function and the call will be forwarded to the preprogrammed destination (when FWD is set) or will not be received at all (when DND is set).

- **Message Waiting**

A message waiting indication will not be sent to an idle extension hunting destination.


The MESSAGE button light or Message/Ringer Lamp turns on at the original destination only (→ 1.17.1 Message Waiting).

Feature Guide References

2.2.2 Group

1.2 Receiving Group Features

[Flowchart]

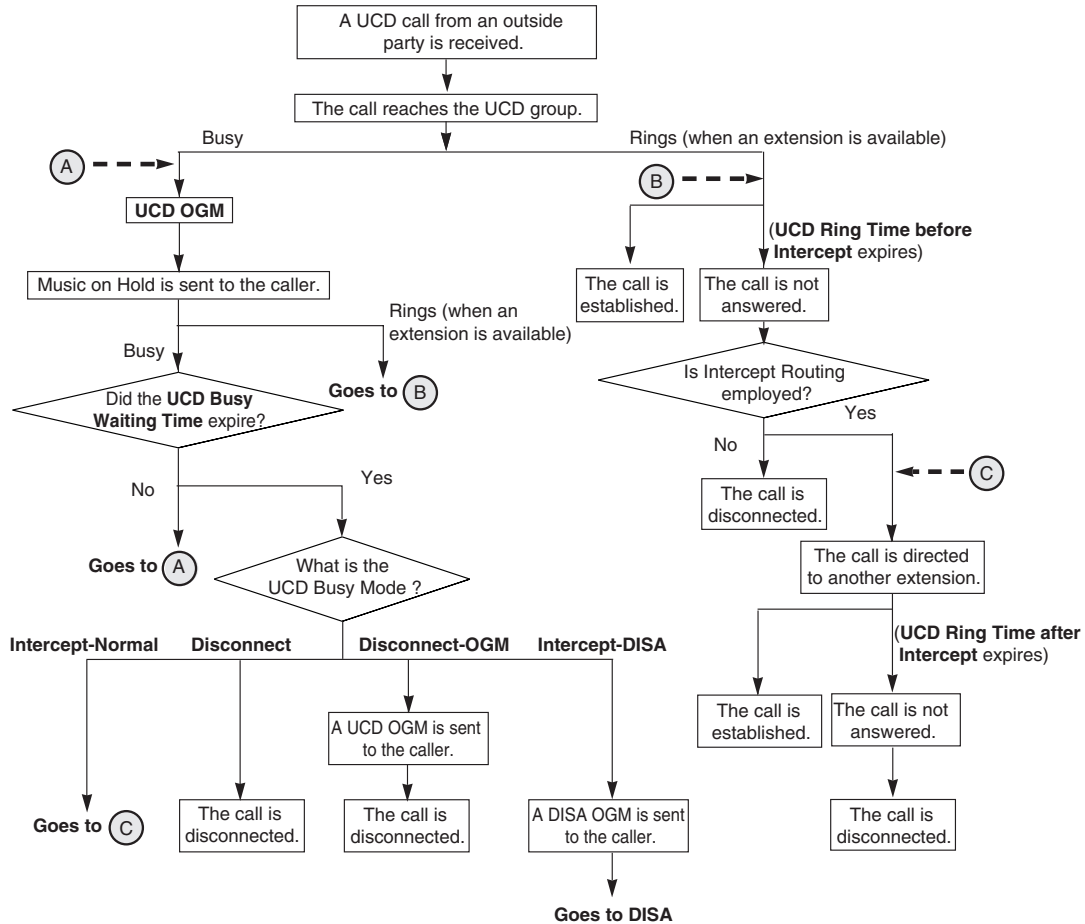

UCD Busy Mode

When all extensions in a UCD group are busy, a call will wait for a preprogrammed length of time (→ UCD Busy Waiting Time [521]). If this timer expires, the PBX will handle the call in one of the following ways according to system programming (→ UCD Busy Mode [523]):

- a) **Disconnect:** The call is disconnected immediately.
- b) **Disconnect-OGM:** The call is disconnected after a UCD outgoing message (OGM) plays (e.g., "We are still handling other calls. Please call back later.").
- c) **Intercept-Normal:** The call is directed to preprogrammed destinations (→ Flexible Ringing—Day/Night/Lunch [408-410]).
- d) **Intercept-DISA:** The call is directed to the DISA feature (→ 1.15.6 Direct Inward System Access (DISA)) and the caller hears a DISA OGM (e.g., "Thank you for calling Company A. Press 1 to speak to Sales. Press 2 to speak to Support.").

UCD Intercept Mode

When extensions in a UCD group are available but do not answer an outside (CO) line call within a preprogrammed length of time (→ UCD Ring Time before Intercept [525]), the PBX will handle the call in one of the following ways according to system programming (→ UCD Intercept Mode [524]):

- a) **Disconnect:** The call is disconnected. If a UCD OGM is not played, the call will not be disconnected until the caller goes on-hook.
- b) **Intercept:** The call is directed to preprogrammed destinations (→ Flexible Ringing—Day/Night/Lunch [408-410]). The extensions that receive the redirected call ring for a preprogrammed time period (→ UCD Ring Time after Intercept [526]). When the timer expires, the call is disconnected. If a UCD OGM is not played, the call will not be disconnected until the caller goes on-hook.

Conditions

- To use this feature, "UCD" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]).
- **UCD OGM**
It is possible to select the UCD OGM sent to the caller when a call arrives at a UCD group and all extensions in the group are busy (→ UCD Waiting Message [527]).
- The Log-in or Log-out status can be set for each extension (→ 1.2.4 Log-in/Log-out). The last member of a group cannot log out.
- **FWD/DND Mode**
When searching for an available extension, any extension that has set FWD—All Calls, FWD—Busy/No Answer, or DND will be skipped (→ 1.3.1 Call Forwarding (FWD)/Do Not Disturb (DND)).
- **UCD Busy Waiting Time**
It is possible to assign the length of time (→ UCD Busy Waiting Time [521]) the PBX holds an incoming outside (CO) line call via the UCD feature when all extensions in the UCD group are busy, and to assign the interval time between the repeated UCD OGMs (→ UCD OGM Message Interval Time [522]).

Feature Guide References

- 1.1.1.2 Intercept Routing
- 1.12.4 Music on Hold
- 2.2.2 Group


1.2.3 Direct Inward System Access (DISA) Ring

Description

A Direct Inward System Access (DISA) ring group is a specific extension group that receives DISA calls directed to the group. All extensions in the DISA ring group assigned as an Automated Attendant (AA) destination (→ DISA Built-in AA [501]) ring simultaneously.

Delayed Ringing

Each extension can be programmed for Delayed Ringing (→ Delayed Ringing—Day/Night/Lunch [411-413]), which allows extensions to be alerted to calls by flashing buttons only. Received calls can be answered by pressing the flashing button even if the extension is not ringing.

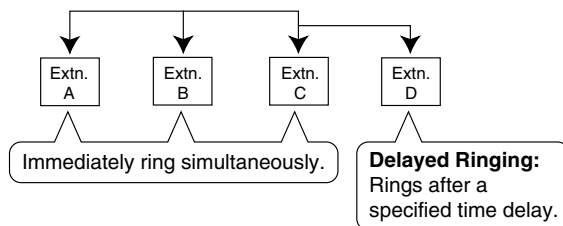

Conditions

- To use this feature, "DISA" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]), and DISA AA service must be assigned as the destination of incoming outside (CO) line calls via the DISA feature (→ DISA Incoming Call Dial Mode [500]).
- The Log-in or Log-out status can be set for each extension (→ 1.2.4 Log-in/Log-out). The last member of a group cannot log out.
- The Delayed Ringing feature does not apply to DISA or Direct In Line (DIL) calls. If the destination is a DISA ring group, this feature will function.

Feature Guide References

- 1.15.6 Direct Inward System Access (DISA)
- 2.2.2 Group

1.2.4 Log-in/Log-out

Description

Members of an idle extension hunting group, Direct Inward System Access (DISA) ring group, or Uniform Call Distribution (UCD) group can join (Log-in) or leave (Log-out) groups manually. Group members can log in at the beginning of a work shift when they are ready to answer calls, and log out at the end of the work shift.

Conditions

- The last member of a group cannot log out.
- While logged out from a group, a member extension will not receive calls to that group via the DISA, UCD, or Idle Extension Hunting features.
- **Log-in/Log-out Button**
A flexible CO button can be customised as a Log-in/Log-out button. It shows the current status as follows:

Light Pattern	Status
Red on	Logged out
Off	Logged in

Feature Guide References

- 1.2.1 Idle Extension Hunting
- 1.2.2 Uniform Call Distribution (UCD)
- 1.2.3 Direct Inward System Access (DISA) Ring
- 1.18.2 Flexible Buttons

User Manual References

- 1.5.4 Leaving a Group (Log-in/Log-out)

1.3 Call Forwarding (FWD)/Do Not Disturb (DND) Features

1.3.1 Call Forwarding (FWD)/Do Not Disturb (DND)

1.3.1.1 Call Forwarding (FWD)/Do Not Disturb (DND)—OVERVIEW

Description

When an extension user cannot answer calls (is on a call, out of the office, etc.), it is possible to forward or refuse calls directed to that extension using the following features:

1. Call Forwarding (FWD)
2. Do Not Disturb (DND)

1. FWD

Extension users can forward their incoming calls to preset destinations (→ 1.3.1.2 Call Forwarding (FWD)).

2. DND

An extension user can send a DND tone to let the caller know that he or she is not available (→ 1.3.1.3 Do Not Disturb (DND)).

Conditions

- **FWD/DND Button**

If a proprietary telephone (PT) does not have an FWD/DND button, a flexible CO button can be customised as an FWD/DND button.

[Button Status]

The FWD/DND button shows the current status as follows:

Light Pattern	Status
Red on	DND on
Slow red flashing	FWD on
Off	FWD/DND off

- Setting a new FWD mode, such as All Calls or Busy/No Answer, or the DND feature, clears the status of the previous FWD mode or DND feature.

Feature Guide References

1.18.1 Fixed Buttons


1.18.2 Flexible Buttons

1.3.1.2 Call Forwarding (FWD)

Description

Extension users can forward their calls to preset destinations. There are 4 Call Forwarding (FWD) modes, described below.

Mode	Description
All Calls	All calls are forwarded to another extension.
Busy/No Answer	All calls are forwarded to another extension when the extension user's line is busy, or when the user does not answer within a preprogrammed time period (→ Call Forwarding Start Time [202]).
To Outside (CO) Line	All calls are forwarded to an outside party, provided this feature is enabled for each extension through system programming (→ Call Forwarding to CO Line [607]).
Follow Me	When an extension user fails to set this feature before leaving his or her desk, this feature can be set from the destination extension.

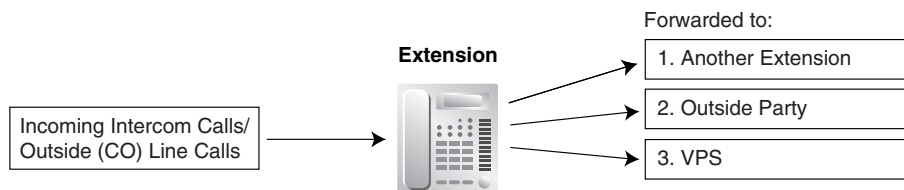

[Available Destinations]

Destination	Availability
Extension (proprietary telephone [PT]/single line telephone [SLT])	—
Automatic Line Access no. + Phone no.	Only available when FWD to Outside (CO) Line is enabled for the extension through system programming (→ Call Forwarding to CO Line [607]).
Outside (CO) Line Group Access no. + Outside (CO) Line Group no. + Phone no.	Only available when FWD to Outside (CO) Line is enabled for the extension through system programming (→ Call Forwarding to CO Line [607]).
Voice Processing System (VPS)	—

Conditions

[General]

- This feature does not apply to calls from Hold Recall, Camp-on Recall, and Timed Reminder.
- The types of calls that are forwarded by this feature are:


1.3 Call Forwarding (FWD)/Do Not Disturb (DND) Features

Call Type	
Outside (CO) line calls	Normal except FWD to Outside (CO) Line, Direct In Line (DIL), Direct Inward System Access (DISA)
Intercom calls	Extension, Transfer


- **Uniform Call Distribution (UCD)**

When searching for an available extension within a UCD group, any extension that has set FWD will be skipped. However, if the last extension that can receive a call has set FWD, the call will be forwarded to that extension's call forwarding destination. The last member of a UCD group cannot log out.

- When a call is forwarded, the corresponding message waiting indication is not forwarded. The MESSAGE button light or Message/Ringer Lamp turns on only at the originally called extension (→ 1.17.1 Message Waiting).
- It is programmable whether the calls received on outside (CO) lines programmed as "Normal" (→ CO Line Mode—Day/Night/Lunch [414-416]) are forwarded for each extension or not (→ Call Forwarding Selection [963]). If FWD is enabled for an extension whose FWD destination is a VPS or Telephone Answering Machine (TAM) and the extension has been assigned to ring with other extensions, the VPS or TAM may answer the call before other extensions can answer it. To prevent this, disable FWD.
- A call can only be automatically forwarded one time. In the example below, extension A's calls are being forwarded to extension B. If extension B tries to set FWD to extension C, the extension B user hears a reorder tone and the setting is denied. If extension B has already set FWD to extension C, and extension A tries to set FWD to extension B, the setting is also denied.

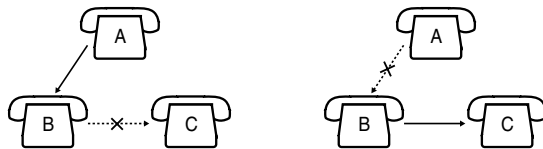

- The destination of an extension's forwarded calls can call or transfer calls to the original extension.

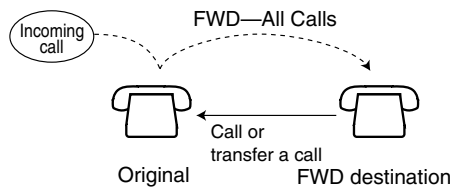

[Busy/No Answer]

- **No Answer Time**

The length of time before calls are forwarded is programmable (→ Call Forwarding Start Time [202]).

[To Outside (CO) Line]

- **FWD to Outside (CO) Line**

System programming determines the extensions that can forward all intercom calls and certain outside (CO) line calls to an outside party (→ Call Forwarding to CO Line [607]). These outside (CO) line calls must arrive on outside (CO) lines whose programming (→ CO Line Mode—Day/Night/Lunch [414-416]) is one of the following:

- a) DIL
- b) DISA (only when the call is directly sent to an extension, not intercepted)

- c) UCD** (when only one member belongs to the group)
- **Outside (CO) Line Call Duration**
If a call between 2 outside parties is established, the call duration will be restricted by a system timer (→ CO-to-CO Line Call Duration [205]). Both parties will hear a warning tone 15 seconds before the timer expires. When the timer expires, the call is disconnected (→ 1.10.8 Outside (CO) Line Call Limitation).
- If a CPC (Calling Party Control) signal or reverse signal is received from an outside (CO) line, the corresponding call between 2 outside parties will be disconnected.

User Manual References

- 1.5.1 Forwarding Your Calls (Call Forwarding [FWD])
- 1.8.3 If a Voice Processing System is Connected

1.3.1.3 Do Not Disturb (DND)

Description

Extension users can use this feature to prevent calls from ringing at their extension. The calling extension will hear a Do Not Disturb (DND) tone.

Conditions

- **DND Override**
An extension in DND mode can be called by extensions that are allowed to override DND through system programming (→ DND Override [609]).
- This feature does not apply to calls from Hold Recall, Camp-on Recall, and Timed Reminder.
- Calls from outside (CO) lines programmed as "Normal" or "DIL" (→ CO Line Mode—Day/Night/Lunch [414-416]) can be received at a user's extension, but the telephone will not ring. The corresponding CO button will flash when an outside (CO) line call is received, and the user can answer the call by pressing this button.

User Manual References

- 1.2.4 When the Dialed Party is Busy or There is No Answer
- 1.7.2 Refusing Incoming Calls (Do Not Disturb [DND])

1.4 Answering Features

1.4.1 Answering Features

1.4.1.1 Answering Features—OVERVIEW

Description

An extension user can answer incoming calls using the following methods:

Called Extension	Feature	Description	Details in
A user's own extension (proprietary telephone [PT])	Line Preference—Incoming	A user can select the method to answer incoming calls.	• 1.4.1.2 Line Preference—Incoming
	Direct One-touch Answering	A user can answer an incoming call simply by pressing the flashing CO or INTERCOM button.	–
	Hands-free Answerback	A user can answer calls automatically and establish a hands-free conversation.	• 1.4.1.4 Hands-free Answerback
A user's own extension (single line telephone [SLT])	Receiving Calls	A user can answer an incoming call simply by going off-hook.	–
Another extension	Call Pickup	A user can pick up a call to a specific extension, a call within the user's extension group, or a call received by a Telephone Answering Machine (TAM) extension.	• 1.4.1.3 Call Pickup

1.4.1.2 Line Preference—Incoming

Description

A proprietary telephone (PT) user can select the method used to answer incoming calls from the following 3 line preferences.

Each of these line preferences can be selected by each extension through personal programming (Line Preference—Incoming).

Type	Description
No Line	A user can select a line by pressing the desired Outside (CO) Line Access button to answer an incoming call after going off-hook.
Prime Line	A user can answer a call arriving at a flexible CO button (assigned as the "Prime Line") simply by going off-hook.
Ringling Line (default)	A user can answer a call ringing at one's own telephone simply by going off-hook.

Conditions

- Ringing methods can be selected from among immediate, delayed, no ringing, or no incoming calls (disable) through system programming (→ Flexible Ringing—Day/Night/Lunch [408-410], Delayed Ringing—Day/Night/Lunch [411-413]).
- A single line telephone (SLT) user can select "Ringling Line" mode only.
- A flexible CO button should be assigned as an Outside (CO) Line Access button (Single-CO [S-CO], Group-CO [G-CO] or Other-CO [O-CO]) before selecting a line preference.
- Setting a new line preference clears the previous line preference.
- In "Prime Line" mode, if a PT user receives an incoming call on a line other than the "Prime Line", the user must go off-hook and then press the corresponding flashing CO button to answer the call.

User Manual References

3.1.2 Changing Personal Settings Using Programming Mode

1.4.1.3 Call Pickup

Description

An extension user can answer a call ringing at another extension by entering the appropriate feature numbers.

The following types of Call Pickup are available:

Type	Description
Directed Call Pickup	A call to a specific extension is answered.
Group Call Pickup	A call to an extension in the same extension group (→ Extension Group [600]) is answered.
Call Retrieving from a Telephone Answering Machine (TAM)	A call received by a preprogrammed TAM extension (→ TAM Extension [611]) is answered.

Call Pickup Deny

An extension user can prevent other extensions from picking up calls ringing at his or her own extension. If this feature is enabled, other users will hear a reorder tone when trying to pick up calls.

Conditions

[Directed/Group Call Pickup]

- **Call Pickup applies to:**
Intercom calls, outside (CO) line calls, and doorphone calls.
- An extension user will hear a confirmation tone when he or she picks up the call with the Directed Call Pickup or Group Call Pickup feature. It is possible to eliminate the tone through system programming (→ Call Pickup Tone [117]).
- Calls from Hold Recall and Camp-on Recall cannot be picked up with the Directed/Group Call Pickup feature.

[Group Call Pickup]

- By setting system programming (→ Pickup Group [127]) in advance, an extension user can pick up a call to another extension in the same extension group simply by going off-hook, even if his or her extension is not ringing.

User Manual References

1.3.3 Answering a Call Ringing at Another Telephone (Call Pickup)

1.4.1.4 Hands-free Answerback

Description

A user with a speakerphone-equipped proprietary telephone (PT) can answer intercom calls automatically without lifting the handset. When a call is received at an extension that is in Hands-free Answerback mode, the caller hears a confirmation tone and the called extension hears a beep tone. Then the conversation is automatically established.

Conditions

- **Hands-free Answerback applies to:**
Intercom calls (not including outside (CO) line calls or doorphone calls)
- When an intercom call/outside (CO) line call is transferred to an extension, this feature is overridden and a ring tone is heard.

Feature Guide References

1.5.1.1 Intercom Call

User Manual References

1.3.2 Answering Hands-free (Hands-free Answerback)

1.5 Making Call Features

1.5.1 Intercom Call Features

1.5.1.1 Intercom Call

Description

An extension user can call another extension user.

Conditions

- **Extension Number/Name Assignment**
Extension numbers (→ Extension Number [009]) and names (→ Extension Name [604], Extension Name in Cyrillic [616]) can be assigned to all extensions. During intercom calls, the number and name of the other extension are shown on the displays of proprietary telephones (PTs).
- **DSS Button**
It is possible to call another extension simply by pressing the corresponding Direct Station Selection (DSS) button (→ DSS Off-hook Mode [126]). A flexible CO/DSS/MESSAGE button can be customised as a DSS button.
The DSS buttons on a DSS Console can also be used.
- **Alternate Receiving—Ring/Voice**
A PT user can select to receive intercom calls by ring tone or by voice, through personal programming (Alternate Receiving—Ring/Voice). If a user selects voice-calling, the calling party can talk to the user immediately after hearing a confirmation tone.
- **Alternate Calling—Ring/Voice**
A caller can change the called party's preset call receiving method (ring tone or voice). By doing so, ring-calling is switched to voice-calling, or vice versa, at the called party. This setting is active for the current call only, after which it reverts to the called party's previous setting.
- The extension ring tone pattern for incoming intercom calls can be selected through system programming (→ Extension Ring Tone Pattern [115]). The ringback tone pattern for outgoing intercom calls and for incoming outside (CO) line calls can also be selected through system programming (→ Ringback Tone Pattern [128]).
- **Tone after Dialling**
After dialling an extension number, a user will hear one of the following:

Type	Description
Ringback Tone	Indicates the call is being received at the called party's extension.
Confirmation Tone	Indicates the called party has set voice-calling.
Busy Tone	Indicates the called party's extension is busy.
DND Tone	Indicates the called party has set Do Not Disturb (DND).

Feature Guide References

- 1.18.2 Flexible Buttons
- 4.2.1 Tones/Ring Tones

User Manual References

- 1.2.1 Basic Calling
- 1.2.5 Switching the Calling Method (Alternate Calling—Ring/Voice)
- 3.1.2 Changing Personal Settings Using Programming Mode

1.5.2 Outside (CO) Line Call Features

1.5.2.1 Outside (CO) Line Call Features—OVERVIEW

Description

An extension user can use the following features when making an outside (CO) line call:

Feature	Description	Details in
Emergency Call	A user can dial preprogrammed emergency numbers regardless of the restrictions imposed on the extension.	• 1.5.2.2 Emergency Call
Account Code Entry	A user can enter an account code to identify outgoing calls for accounting and billing purposes.	• 1.5.2.3 Account Code Entry
Pulse to Tone Conversion	A user can temporarily switch from Pulse mode to DTMF (Dual Tone Multi-Frequency) mode if necessary.	• 1.5.2.4 Dial Type Selection
Pause Insertion	A dialling pause can be manually inserted by pressing the PAUSE button, or can be automatically inserted after a user-dialled code, such as a Host PBX Access code or Automatic Pause Insertion code. The length of the pause can be specified through system programming.	• 1.5.2.6 Pause Insertion • 1.5.2.7 Host PBX Access Code (Access Code to the Telephone Company from a Host PBX)

1.5.2.2 Emergency Call

Description

An extension user can dial preprogrammed emergency numbers (→ Emergency Number [309]) after seizing an outside (CO) line regardless of the restrictions imposed on the extension.

Conditions

- If the PBX is installed behind an existing host PBX, an extension user must dial the Host PBX Access code after the Outside (CO) Line Access number.
- This feature will function even when:
 - In Account Code—Verify-All/Verify-Toll/Forced mode (→ 1.5.2.3 Account Code Entry)
 - Restricted by the current class of service (COS) (→ 1.8.1 Toll Restriction (TRS))
 - In Extension Lock (→ 1.8.3 Extension Lock)

1.5.2.3 Account Code Entry

Description

An account code is used to identify outgoing outside (CO) line calls for accounting and billing purposes. Account codes are appended to SMDR call records (→ 1.20.1 Station Message Detail Recording (SMDR)), and have several uses. For example, a firm can use an account code for each client to determine which calls were made for which client, and can submit a bill to the client according to the client's account code as shown on the SMDR call record.

There are 4 methods of entering account codes, explained below. One method is assigned to each extension through system programming (→ Account Code Mode [605]).

Mode	Description
Option	An extension user can (but is not required to) enter a 4-digit account code during a conversation or within 30 seconds after a conversation ends when a record is needed.
Forced	An extension user must always enter a 4-digit account code within 5 seconds after seizing an outside (CO) line. This method ensures that extension users will not forget to enter account codes.
Verify-All	An extension user must always enter a preprogrammed account code (→ Account Code [310]) within 5 seconds after seizing an outside (CO) line. If the entered code does not match any preprogrammed code, the user will hear a reorder tone.
Verify-Toll	An extension user can enter a preprogrammed account code (→ Account Code [310]) within 5 seconds after seizing an outside (CO) line to override TRS (→ 1.8.2 Toll Restriction (TRS) Override by Account Code). Classes of service (COSs) 3 through 5 will be changed temporarily to COS 2. COSs 1 and 2 will not be affected. If the entered account code is also registered as an extension password, the extension password feature will be given priority. The COS of the corresponding extension will be applied.

Conditions

- An account code can be stored in Memory Dialling (One-touch Dialling, Hot Line, Speed Dialling—System/Personal, Call Forwarding (FWD) to Outside (CO) Line, etc.). In this case, the Account Code feature number and specified account code must be entered after the Outside (CO) Line Access number.
- An extension user does not need to enter an account code for incoming outside (CO) line calls.
- Even in Forced/Verify-All/Verify-Toll mode, emergency calls can be made without an account code (→ 1.5.2.2 Emergency Call).

User Manual References

1.2.1 Basic Calling

1.5.2.4 Dial Type Selection

Description

The dialling mode can be selected for each outside (CO) line through system programming (→ Dial Mode [401]) regardless of the originating extension (dependent on the contract with the telephone company).

Mode	Description
DTMF (Dual Tone Multi-Frequency)	Numbers dialled by an extension user are transmitted to the outside (CO) line using tones. If this PBX is installed behind an existing host PBX, select this mode as necessary. If your telephone company or a host PBX can receive both DTMF and Pulse signals but the contract specifies DTMF lines, select this mode.
Pulse (Rotary)	Numbers dialled by an extension user are transmitted to the outside (CO) line using pulses.
Call Blocking	If your telephone company or a host PBX can receive both DTMF and Pulse signals but the contract specifies Pulse lines, select this mode. When dialling with a touch-tone telephone, only Pulse signals will be sent to the telephone company.

Conditions

- Automatic Configuration for Outside (CO) Line Type**
 The dialling mode of connected outside (CO) lines is automatically assigned after restarting the PBX using the System Clear Switch or through system programming (→ System Data Clear [999]). No system programming in Dial Mode [401] and Pulse Speed [402] is required unless the dialling mode of the connected outside (CO) lines is Call Blocking. If your telephone company can receive both DTMF and Pulse signals, the PBX selects an outside (CO) line type according to the following priority: DTMF → Pulse (High) → Pulse (Low)
- Pulse to Tone Conversion**
 It is possible for an extension user to temporarily switch from Pulse mode to DTMF mode in order to access special services such as computer-accessed long-distance calling or voice mail services. To switch to DTMF mode, wait for a preprogrammed time period after the outside (CO) line is connected, or press the "*#" key. This feature functions only on outside (CO) lines set to "Pulse" or "Call Block" mode (→ Dial Mode [401]). DTMF mode cannot be changed to Pulse mode.
- The pulse rate for outside (CO) lines that have been set to "Pulse" or "Call Block" mode (→ Pulse Speed [402]) should be selected depending on your telephone company or a host PBX. There are 2 pulse rates: Low (10 pps) and High (20 pps).
- It is possible to assign the minimum duration of the DTMF signal sent to outside (CO) lines that have been set to "DTMF" mode (→ DTMF Time [210]).
- It is programmable whether DTMF dialling is sent to the telephone company when an extension user redials after changing from Pulse mode to DTMF mode by pressing the "*#" key (→ Redialling after Pulse to Tone Conversion [119]).

User Manual References

1.4.9 Changing the Dialling Mode (Pulse to Tone Conversion)

1.5.2.5 Reverse Circuit

Description

The PBX can detect the reverse signal sent from the telephone company when an extension user tries to make an outside (CO) line call. This detects the start (the called party goes off-hook) and end (the called party goes on-hook) of an outgoing outside (CO) line call. The duration of the call can be verified with SMDR using this feature (→ 1.20.1 Station Message Detail Recording (SMDR)).

This feature is also known as Polarity Reverse Detection.

Conditions

- If Reverse Signal Detection is enabled for an outside (CO) line (→ Polarity Reverse Detection [424]), the PBX will automatically start the timer (→ Call Duration Counter Start [204]) immediately after the outside party answers the call.

1.5.2.6 Pause Insertion

Description

A dialling pause of a preprogrammed length can be inserted manually or automatically when dialling.

Manual Pause Insertion: A pause can be manually inserted by pressing the PAUSE button.

Automatic Pause Insertion: A pause will be automatically inserted after the user dials any one of the following numbers:

- a) Outside (CO) Line Access number
- b) Automatic Pause Insertion code
- c) Host PBX Access code (→ 1.5.2.7 Host PBX Access Code (Access Code to the Telephone Company from a Host PBX))

Conditions

- The pause length is programmable for each outside (CO) line (→ Pause Time [417]).
- When a dialled telephone number matches one of the Automatic Pause Insertion codes assigned through system programming (→ Automatic Pause Insertion Code [311]), a pause will be automatically inserted after the code. This is particularly convenient if a second dial tone is sent from your telephone company.
- This feature functions for Speed Dialling, One-touch Dialling, Last Number Redial, Saved Number Redial, Hot Line, and Call Forwarding—To Outside (CO) Line, as well as for normal calls.

Conditions

- Access to the host PBX during a conversation is also possible (→ 1.10.7 External Feature Access (EFA)).
- **TRS**
TRS checks only the dialled telephone number, excluding the Host PBX Access code, when accessing the telephone company through the host PBX (→ 1.8.1 Toll Restriction (TRS)).
- **SMDR**
The Host PBX Access code can be logged by SMDR along with the dialled number when accessing the telephone company through the host PBX (→ 1.20.1 Station Message Detail Recording (SMDR)).

1.5.3 Seizing a Line Features

1.5.3.1 Seizing a Line Features—OVERVIEW

Description

A proprietary telephone (PT) user can select the line that is seized in order to make a call, using one of the following features:

Feature	Description	Details in
Line Preference—Outgoing	A user can select the line to be seized when going off-hook.	• 1.5.3.2 Line Preference—Outgoing
Outside (CO) Line Access	A user can select the Outside (CO) Line Access method used when making outside (CO) line calls.	• 1.5.3.3 Outside (CO) Line Access

1.5.3.2 Line Preference—Outgoing

Description

Through personal programming, a proprietary telephone (PT) user can select the preferred method of seizing a line (Line Preference—Outgoing) to be used each time the user goes off-hook.

Method	Description
Idle Line	When a user goes off-hook, an idle outside (CO) line is selected automatically from among the assigned outside (CO) lines (→ Automatic Designated Line Access [419]).
No Line	When a user goes off-hook, no line is selected. In order to make a call, the user must select the desired line manually.
Prime Line	When a user goes off-hook, the preset line is selected automatically.

Conditions

- A flexible CO button should be assigned as an Outside (CO) Line Access button (Single-CO [S-CO], Group-CO [G-CO], or Other-CO [O-CO]) before selecting a line preference.
- Setting a new line preference clears the previous line preference.
- **Line Preference Override**
A user can override the preset line preference temporarily by pressing the desired Outside (CO) Line Access button or INTERCOM button before going off-hook.
- System programming determines the extension users that can make outside (CO) line calls in each time service mode (→ Flexible Outward Dialling—Day/Night/Lunch [405-407]).
- It is possible to specify which outside (CO) lines are connected to the PBX (→ CO Line Connection [400]). This prevents extension users from trying to select or making calls using outside (CO) lines that are not connected.

User Manual References

3.1.2 Changing Personal Settings Using Programming Mode

1.5.3.3 Outside (CO) Line Access

Description

There are 3 methods of accessing an outside (CO) line.

Method	Description	Operation
Automatic Line Access (Local Access)	Selects an idle outside (CO) line automatically from the assigned outside (CO) lines (→ Automatic Designated Line Access [419]). If Idle Line Preference (→ 1.5.3.2 Line Preference—Outgoing) is set on the extension through personal programming, the user can access an idle line simply by going off-hook.	Dial the Automatic Line Access number (9/0)* (→ Automatic Line Access [121]). Note * For New Zealand, the Automatic Line Access number may be either 1 or 9.
Outside (CO) Line Group Access	Selects an idle outside (CO) line from the corresponding outside (CO) line group.	Dial the Outside (CO) Line Group Access number and an outside (CO) line group number, or press a Group-CO (G-CO) button.
S-CO Line Access	Selects the desired outside (CO) line directly.	Press the Single-CO (S-CO) button.

Line Access Using the Other-CO (O-CO) Button

To select an idle outside (CO) line from among the outside (CO) lines that are not assigned to S-CO or G-CO buttons, the proprietary telephone (PT) user can press the O-CO button.

Conditions

- The PBX waits for a preprogrammed length of time (→ Dialling Start Time [206]) after seizing an outside (CO) line before dialling.
- Button Assignment**

A flexible CO button can be customised as an S-CO, G-CO, or O-CO button as follows:

Type	Assignable parameter
Single-CO (S-CO)	A specified outside (CO) line is assigned (Default: CO 1–CO 3).
Group-CO (G-CO)	An outside (CO) line group is assigned (→ CO Line Group Number [404]).
Other-CO (O-CO)	Outside (CO) lines that are not assigned to S-CO or G-CO buttons are assigned.

The same outside (CO) line group can be assigned to more than one G-CO button on the same PT. The same outside (CO) line can be assigned to an S-CO button and a G-CO button.

Dialling the Outside (CO) Line Access number selects a CO button according to the following priority:

S-CO → G-CO → O-CO

Once a flexible CO button is assigned as an Outside (CO) Line Access button, it indicates line status with a variety of light patterns (→ 1.18.3 LED Indication).

- Direct Outside (CO) Line Access**

If a PT user is on-hook when pressing an idle CO button, the PT automatically enables hands-free

1.5 Making Call Features

operation mode. The user can dial without lifting the handset or pressing the SP-PHONE or MONITOR button.

- **Outside (CO) Line Hunting Order for Automatic Line Access**
The outside (CO) line hunting sequence (from highest-numbered outside (CO) line, or in rotation) for Automatic Line Access can be determined through system programming (→ Automatic Rotation for CO Line Access [122]).
- System programming determines the extension users that can make outside (CO) line calls in each time service mode (→ Flexible Outward Dialling—Day/Night/Lunch [405-407]).
- It is possible to specify which outside (CO) lines are connected to the PBX (→ CO Line Connection [400]). This prevents extension users from trying to select or making calls using outside (CO) lines that are not connected.

Feature Guide References

1.18.2 Flexible Buttons

User Manual References

1.2.1 Basic Calling

1.6 Memory Dialling Features

1.6.1 Memory Dialling Features

1.6.1.1 Memory Dialling Features—OVERVIEW

Description

An extension user can store frequently dialled numbers in the PBX. A stored number can be dialled by a simple operation.

1. Features

Feature		Storage Method	Details in
One-touch Dialling		Personal Programming, System Programming	• 1.6.1.2 One-touch Dialling
KX-T7710 One-touch Dialling		System Programming	• 1.6.1.3 KX-T7710 One-touch Dialling
Redial	Last Number	The last or most recently dialled number is automatically stored.	• 1.6.1.4 Redial
	Saved Number	While in a conversation with an outside party or while hearing a busy tone, the current telephone number can be manually stored and redialled afterwards.	
Speed Dialling	Personal	Personal Programming with the Feature Number	• 1.6.1.5 Speed Dialling—Personal/System
	System	System Programming	
Quick Dialling		System Programming	• 1.6.1.6 Quick Dialling
Hot Line		Personal Programming with the Feature Number	• 1.6.1.7 Hot Line
Incoming Call Log		Caller ID information is automatically stored.	• 1.16.2 Incoming Call Log

2. Valid Input

Input	Displayed while Entering	Description
0–9/*/#	0–9/*/#	Store digits, *, and # by pressing the corresponding buttons.
PAUSE (Pause)	P	Store a dialling pause by pressing the PAUSE button (→ 1.5.2.6 Pause Insertion).

1.6 Memory Dialling Features

Input	Displayed while Entering	Description
FLASH/RECALL (Hooking)* ¹	F	Store an EFA signal (EFA mode) by pressing the FLASH/RECALL button at the beginning of the number (→ 1.10.7 External Feature Access (EFA)).
INTERCOM (Secret)* ¹	[/]	Prevent all or part of a System Speed Dialling number or One-touch Dialling number from being displayed when a call is made, by pressing the INTERCOM button at the beginning and at the end of the number to be hidden (Secret Dialling). It is programmable whether the hidden part will be shown on SMDR (→ 1.20.1 Station Message Detail Recording (SMDR)).
CONF (Hyphen)* ²	-	Store a hyphen by pressing the CONF button.

*¹ Available only when in system/personal programming mode

*² Available only when in system programming mode

[Example of Secret Dialling]

When storing the number "91234567890", to prevent the telephone number "1234567890" from being displayed when making a call:

Enter [9] → [INTERCOM] → [1][2][3][4][5][6][7][8][9][0] → [INTERCOM].

Notes

- The characters for secret code, "[" and "]" (entered by pressing the INTERCOM button), are counted as one digit each.
- It is not possible to hide the Outside (CO) Line Access number (9/0*, or 81 through 83) by pressing the INTERCOM button before dialling it.
 - * For New Zealand, the Automatic Line Access number may be either 1 or 9.

Conditions

- **Outside (CO) Line Access by Memory Dialling (One-touch Dialling/System Speed Dialling)**
A specific Outside (CO) Line Access number can be stored along with the telephone number in Memory Dialling. However, if Memory Dialling is performed after selecting an outside (CO) line, the stored Outside (CO) Line Access number is ignored and the telephone number is sent using the selected outside (CO) line.

1.6.1.2 One-touch Dialling

Description

A proprietary telephone (PT) user can make a call or access a feature with a one-touch operation. This is possible by storing the number (up to 24 digits), such as an extension number, telephone number, account code, or feature number, in a One-touch Dialling button.

Conditions

- **One-touch Dialling Button**
A flexible CO/Direct Station Selection (DSS)/Programmable Feature (PF)/MESSAGE button can be customised as a One-touch Dialling button.
- A number consisting of 25 digits or more can be stored by dividing it and storing it in 2 One-touch Dialling buttons. In this case, the Outside (CO) Line Access number should be stored in the first button.
- Speed Dialling, One-touch Dialling, and manual dialling can be used in combination.
- Personal Speed Dialling numbers (0 through 9) correspond to the numbers (F1 through F10) of the PF buttons assigned as One-touch Dialling numbers.
Assigning a One-touch Dialling number to PF button "F1" will override Personal Speed Dialling number "0", and vice versa.

Feature Guide References

1.18.2 Flexible Buttons

User Manual References

1.2.2 Easy Dialling

1.6.1.3 KX-T7710 One-touch Dialling

Description

The MESSAGE button and each of the 8 One-touch buttons on the KX-T7710 single line telephone (SLT) can be customised to dial an extension number, telephone number, or feature number (up to 24 digits) when the user presses that button. To allow easy configuration of multiple extensions, every KX-T7710 connected to the PBX can be customised with the same settings at once, through system programming (→ KX-T7710 One-touch Dialling [013]). This is useful for hotel room extensions or similar applications.

The KX-T7710 has 2 modes, "NORMAL" mode and "PBX" mode, selected by a switch on the telephone. This feature is available only when the KX-T7710 is in "PBX" mode.

[Programming Example: KX-T7710 One-touch Dialling]

Location No.	Button	Desired Number
1	One-touch Dial 01	100 (Front Desk)
2	One-touch Dial 02	76XX (Wake-up Call)
3	One-touch Dial 03	102 (Restaurant)
(Cont.) :	:	:
:	:	:
9	MESSAGE	784#

Conditions

- System programming determines the SLTs that can receive the message waiting notifications left by another extension (→ SLT Message Waiting [619]).
- If a user goes off-hook with an SLT that has messages waiting, a special dial tone (dial tone 3) will be heard. The user can call a caller back or listen to the message simply by pressing the MESSAGE button because the button includes the default value of Message Waiting Answer feature number.
- Any feature number can be stored in a One-touch button. However, the feature numbers for Personal Speed Dialling, System Speed Dialling, and Quick Dialling do not function.
- KX-T7710 One-touch Dialling is available to users while hearing a dial tone.
- KX-T7710 One-touch Dialling is not available to users when the KX-T7710 is connected in parallel with a proprietary telephone (PT).
- Please refer to the Quick Reference Guide of the KX-T7710 for additional information.

Feature Guide References

1.18.2 Flexible Buttons

1.6.1.4 Redial

Description

There are 2 types of Redial, described below.

Type	Description
Last Number Redial	Every extension automatically saves the last external telephone number dialled, allowing the same number to be easily redialled.
Saved Number Redial	A proprietary telephone (PT) user can save a telephone number while in a conversation with an outside party or while hearing a busy tone, and then easily redial the number later. The saved number is kept until a new number is stored.

Automatic Redial

If Last Number Redial or Saved Number Redial is performed in hands-free mode and the called party is busy, the number will be automatically redialled a preprogrammed number of times (→ Automatic Redial Repeat Count [113]) at a preprogrammed interval (→ Automatic Redial Interval [114]). This feature is only available on PT models that have an SP-PHONE or MONITOR button.

Conditions

[General]

- Up to 64 digits plus the Outside (CO) Line Access number can be stored and redialled for each Redial type.
- Automatic Redial is cancelled if any other number is dialled, or if an incoming call is answered.
- Headset users cannot use the Automatic Redial feature.
- Automatic Redial is not available for some countries/areas.

[Last Number Redial]

- The stored telephone number is replaced whenever a new number is dialled.

[Saved Number Redial]

- **Save Button**
A flexible CO button can be customised as a Save button.

Feature Guide References

1.18.2 Flexible Buttons

User Manual References

1.2.3 Redialling

1.6.1.5 Speed Dialling—Personal/System

Description

An extension user can use short numbers to frequently dialled numbers that are stored in the PBX, either in the extension's Personal Speed Dialling or in System Speed Dialling.

Personal Speed Dialling is also known as Station Speed Dialling.

Conditions

[General]

- Any number, such as a telephone number or feature number, can be stored in Personal Speed Dialling (up to 24 digits) and System Speed Dialling (up to 32 digits).
- This feature is not available on rotary single line telephones (SLTs).

[Personal Speed Dialling]

- Personal Speed Dialling numbers (0 through 9) correspond to the numbers (F1 through F10) of the Programmable Feature (PF) buttons assigned as One-touch Dialling numbers. Assigning a One-touch Dialling number to PF button "F1" will override Personal Speed Dialling number "0", and vice versa.
- An SLT user can check the stored number by exchanging the SLT with a PT. PF buttons (F1 through F10) correspond to Personal Speed Dialling numbers (0 through 9). Press the desired PF button to check the number.

[System Speed Dialling]

- **TRS for System Speed Dialling** (→ TRS—System Speed Dialling Class [301])
Calls made using System Speed Dialling are restricted depending on the class of service (COS) of System Speed Dialling numbers and the COS assigned to each extension (→ 1.8.1 Toll Restriction (TRS)).
- System Speed Dialling numbers (→ System Speed Dialling Number [001]) and names (→ System Speed Dialling Name [011]) can be assigned through system programming. The assigned name will be shown on the display of a proprietary telephone (PT) when an extension user makes calls using this feature.
- **Caller's Name**
If the dialled number matches a number stored in the System Speed Dialling table with an assigned name, the assigned name will be shown on the display (→ 1.16.1 Caller ID).
- System Speed Dialling, One-touch Dialling, and manual dialling can be used in combination.

User Manual References

1.2.2 Easy Dialling

3.3.2 System Programming

1.6.1.6 Quick Dialling

Description

Using Quick Dialling, an extension user can make a call or access a feature easily. This is possible by storing the number (up to 10 digits), such as extension number, telephone number, or feature number, for Quick Dialling through system programming (→ Second Feature Numbering Plan [012]).

[Programming Example: Quick Dialling]

Code No.	Desired Number
50	#34
51	#43
(Cont.) :	:
:	:
59	912345678

In this example:

- a) The feature number for Paging—External, "#34", is stored with the code number "50". Users can make paging announcements by going off-hook and then dialling "50".
- b) The feature number for Paging—Answer, "#43", is stored with the code number "51". Users can answer paging announcements by going off-hook and then dialling "51".
- c) A telephone number, "912345678", is stored with the code number "59". Users can call this outside number by going off-hook and then dialling "59".

Conditions

- This feature is available when "Plan 2" or "Plan 3" is selected in Extension Number [009] (→ 2.3.4 Feature Numbering).

User Manual References

1.2.2 Easy Dialling

1.6.1.7 Hot Line

Description

A single line telephone (SLT) user can make an outgoing call to a previously stored telephone number (up to 32 digits) simply by going off-hook. If the Hot Line feature is set and the user goes off-hook, a special dial tone (dial tone 2) is generated for a preprogrammed time period (→ Hot Line Waiting Time [203]), and then dialling starts. During this waiting time, the user can dial another party, overriding the Hot Line feature.

This feature is also known as Pickup Dialling.

Conditions

- This feature cannot be programmed on rotary SLTs.
- This feature will not function when the extension user goes off-hook to answer an incoming call or retrieve a call on hold.

User Manual References

1.2.2 Easy Dialling

1.7 Busy Line/Busy Party Features

1.7.1 Automatic Callback Busy (Camp-on)

Description

If the dialled extension or outside (CO) line is busy when a call is made, the caller can choose to be informed by a callback ring (Camp-on Recall) when the extension or outside (CO) line becomes free.

When the user answers the callback ring:

For an intercom call: The called extension starts ringing without the user having to redial.

For an outside (CO) line call: The line is seized.

Conditions

- If the callback ring is not answered within 10 seconds (4 rings), the callback is cancelled.
- More than one extension user can set this feature to monitor the same destination extension or outside (CO) line at the same time.

User Manual References

1.2.4 When the Dialled Party is Busy or There is No Answer

1.7.2 Executive Busy Override

Description

An extension user can interrupt an existing call to establish a 3-party conference call.

Executive Busy Override Deny

It is possible for extension users to prevent their calls from being interrupted by another extension user.

Conditions

- System programming determines extension users who can use Executive Busy Override (→ Executive Busy Override [608]).
- This feature will not function when the busy extension has set Executive Busy Override Deny or Data Line Security (→ 1.10.5 Data Line Security).
- When a 2-party conversation is changed to a 3-party conference call, a confirmation tone will be sent to all parties (→ 1.13.1.2 Conference). It is possible to eliminate the tone through system programming (→ Conference Tone [105]).

User Manual References

1.2.4 When the Dialed Party is Busy or There is No Answer

1.7.4 Preventing Other People from Joining Your Conversation (Executive Busy Override Deny)

1.7.3 Call Waiting Tone

Description

When an extension user attempts to call a busy extension (i.e., an extension that is ringing or having a conversation), a call waiting tone will be sent to the called extension to indicate another call is waiting.

Conditions

- This feature functions only if the called extension has activated Call Waiting. If it is activated, the calling extension will hear a ringback tone.
- One of 2 call waiting tones (Tone 1 or Tone 2) can be selected through personal programming (Call Waiting Tone Type Selection). For doorphone calls, Tone 1 is used as a call waiting tone (not changeable). Tone 2 depends on the assignments in CO Line Ring Tone Pattern [423] for outside (CO) line calls and in Extension Ring Tone Pattern [115] for intercom calls.

Feature Guide References

- 1.1.3.5 Call Waiting
- 4.2.1 Tones/Ring Tones

User Manual References

- 3.1.2 Changing Personal Settings Using Programming Mode

1.8 Toll Restriction (TRS) Features

1.8.1 Toll Restriction (TRS)

Description

Toll Restriction (TRS) can prohibit certain extension users from making unauthorised outside (CO) line calls. Every extension is assigned to one of 5 classes of service (COSs) for each time service mode (→ TRS—COS—Day/Night/Lunch [601-603]); COS 1 grants the highest level of authorisation, allowing all outside (CO) line calls to be made, and COS 5 grants the lowest level of authorisation. COSs 2 through 5 are used to restrict calls with a combination of preprogrammed Denied and Exception Code Tables, explained below.

Denied Code Tables (→ TRS—COS 2-5 Denied Code [302-305])

Denied Code Tables are preprogrammed lists containing the telephone numbers that are restricted. All outgoing outside (CO) line calls made by COS 2 through 5 users are compared to the applicable Denied Code Table(s), and when the leading number of a dialled telephone number (not including the Outside (CO) Line Access number) matches an entry found in an applicable table, the call is denied. Up to a total of 80 denied codes, each consisting of up to 11 digits, can be stored.

Exception Code Tables (→ TRS—Exception Code [306])


Exception Code Tables are preprogrammed lists of leading digits or complete telephone numbers that are checked against every dialled number prohibited by a Denied Code Table. When a dialled number is prohibited by a Denied Code Table, it is compared to the applicable Exception Code Table(s). If the dialled number matches an entry found in an applicable Exception Code Table, the call is permitted. Up to 80 exception codes, each consisting of up to 11 digits, can be stored. The available number of codes depends on the COS assigned to each extension.

Applicable tables by COS

The Denied Code Tables and Exception Code Tables that apply to each COS are listed below.

COS No.	Denied Code Tables	Exception Code Tables
1	No restriction. (Not Programmable)	No restriction. (Not Programmable)
2	20 denied codes programmed in [302]. (Table for Class 2)	80 exception codes (code numbers 01–80) programmed in [306]. (Tables for Classes 2 through 5)
3	40 denied codes programmed in [302] and [303]. (Tables for Classes 2 and 3)	60 exceptions codes (code numbers 01–60) programmed in [306]. (Tables for Classes 3 through 5)
4	60 denied codes programmed in [302] through [304]. (Tables for Classes 2 through 4)	40 exception codes (code numbers 01–40) programmed in [306]. (Tables for Classes 4 and 5)
5	80 denied codes programmed in [302] through [305]. (Tables for Classes 2 through 5)	20 exception codes (code numbers 01–20) programmed in [306]. (Table for Class 5)

COS 1	All outside (CO) line calls permitted.	
COS 2	Class 2 restriction	Class 2 – 5 exceptions
COS 3	Class 2 – 3 restrictions	Class 3 – 5 exceptions
COS 4	Class 2 – 4 restrictions	Class 4 – 5 exceptions
COS 5	Class 2 – 5 restrictions	Class 5 exception

 Calls are restricted
  Calls are permitted


TRS for System Speed Dialling (→ TRS—System Speed Dialling Class [301])

Calls made using System Speed Dialling are restricted depending on the COS of System Speed Dialling numbers and the COS assigned to each extension. If, for example, the COS of System Speed Dialling numbers is assigned as "2", the PBX will allow System Speed Dialling calls for the extensions with COSs 1 and 2, but not allow System Speed Dialling calls for the extensions with COSs 3, 4, and 5 according to TRS as follows:

COS No.	System Speed Dialling Class				
	1	2	3	4	5
1	✓	✓	✓	✓	✓
2		✓	✓	✓	✓
3			✓	✓	✓
4				✓	✓
5					✓

✓ Permitted

[Flowchart]

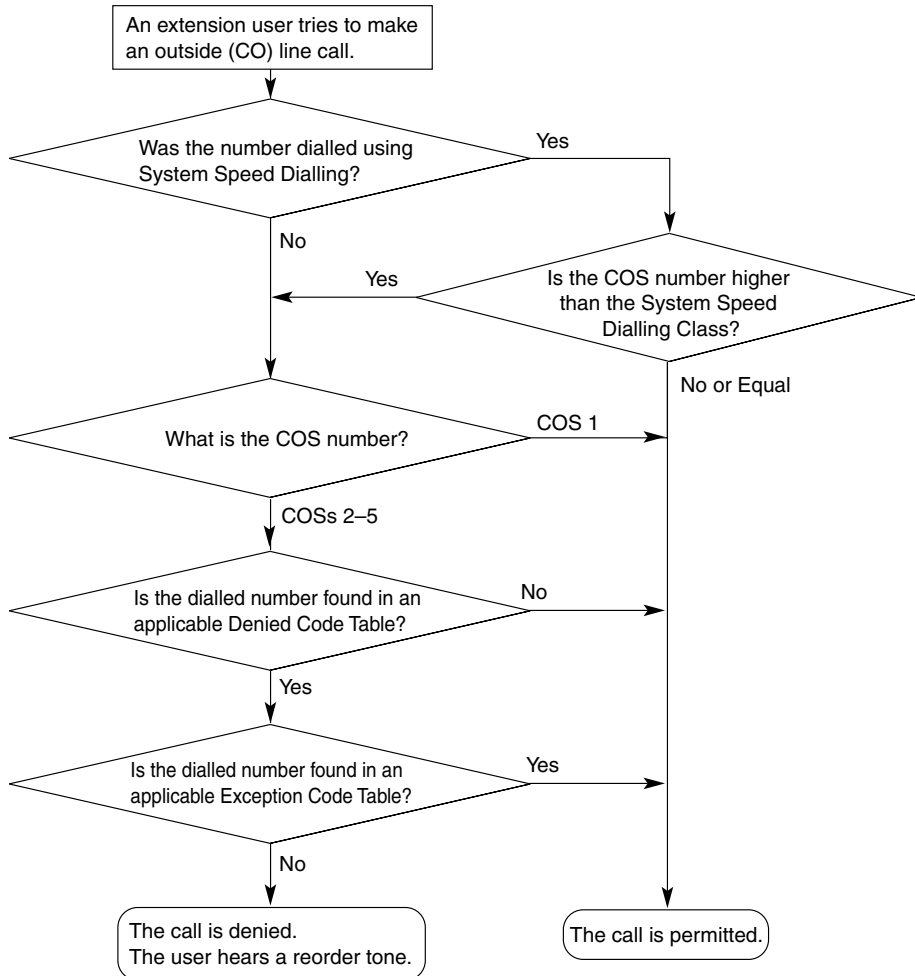

Conditions

WARNING

The software contained in the TRS feature to allow user access to the network must be upgraded to recognise newly established network area codes and exchange codes as they are placed into service.

Failure to upgrade the on-premise PBXs or peripheral equipment to recognise the new codes as they are established will restrict the customer and users of the PBX from gaining access to the network and to these codes.

KEEP THE SOFTWARE UP TO DATE WITH THE LATEST DATA.

- Emergency numbers, such as the police or fire services, should be stored (→ Emergency Number [309]) so that they are not barred by TRS.
- **Host PBX Access Code/Carrier Exception Code**
TRS checks can be carried out on telephone numbers dialed using a Host PBX Access code (→

1.5.2.7 Host PBX Access Code (Access Code to the Telephone Company from a Host PBX)) or Carrier Exception code.

Access Code Type	Access Code is stored in the PBX		Access Code is not stored in the PBX
	Access Code is dialled	Access Code is not dialled	
Host PBX Access Code *1	TRS ignores the code and checks the remaining digits.	Number dialled is not an outside (CO) line call, so TRS does not check the number.	TRS checks the entire number.
Carrier Exception Code *2	TRS ignores the code and checks the remaining digits.	TRS checks the entire number.	TRS checks the entire number.

*1 → Host PBX Access Code [403]

*2 → Carrier Exception Code [300]

- The inter-digit timer (→ Inter-digit Time [208]) applies until the TRS check is completed. When the timer expires, the outgoing outside (CO) line call is disconnected while dialling, if enabled through system programming (→ No Dial Disconnection [211]). For a single line telephone (SLT), an outgoing outside (CO) line call will be released from the DTMF (Dual Tone Multi-Frequency) receiver when the inter-digit timer expires.
- **TRS—Extension Lock Class**
The COS of extensions locked by the Extension Lock or Remote Extension Lock feature (→ 1.8.3 Extension Lock) can be assigned (→ TRS—Extension Lock Class [312]) so that even a locked extension can make outside (CO) line calls. The higher COS number will take precedence. If, for example, COS 3 is assigned to an extension (→ TRS-COS—Day/Night/Lunch [601-603]) and the COS of locked extensions is assigned as "4", when the extension is locked, the PBX allows the extension user to make outside (CO) line calls using COS 4.
- The PBX can also be programmed to perform a TRS check for numbers that contain nondigits (* or #) (→ TRS Check for * and # [125]). If TRS check is disabled, the PBX ignores any nondigits that are dialled when checking, which is useful in preventing some unauthorised calls.

Feature Guide References

1.6.1.5 Speed Dialling—Personal/System


2.2.1 Class of Service (COS)

1.8.2 Toll Restriction (TRS) Override by Account Code

Description

An extension user can override TRS temporarily to make a toll call from a toll-restricted telephone (→ 1.8.1 Toll Restriction (TRS)). The extension user can carry out this feature by entering the appropriate account code before dialling the telephone number (→ Account Code [310]).

[Flowchart]

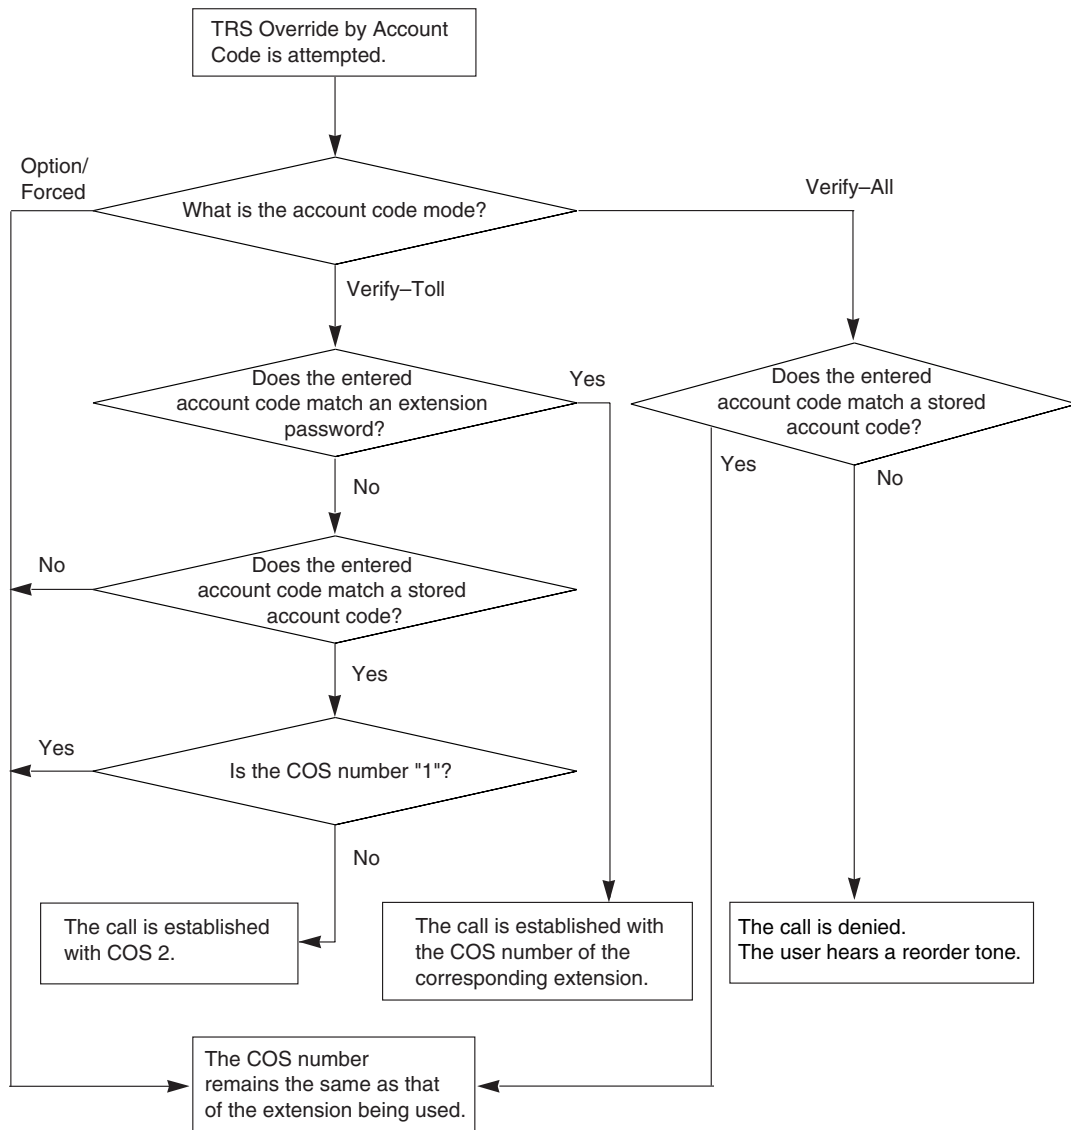

Conditions

- This feature functions only for extensions whose:
 - Account code mode is set to "Verify-Toll" (→ Account Code Mode [605]).
 - Class of service (COS) number is set to 3 through 5.
- If the extension user does not enter an account code or enters an invalid account code, an ordinary TRS check is performed.
- System programming determines whether SMDR (→ 1.20.1 Station Message Detail Recording (SMDR)) logs the 4-digit account code or the 2-digit index of the account code when an extension user makes a call using this feature (→ SMDR Account Code [805]).
- It is also possible to override TRS at another extension using the Walking COS feature (→ 1.8.4 Walking COS).

Feature Guide References

1.5.2.3 Account Code Entry

1.8.3 Extension Lock

Description

Extension users can lock their telephones to prevent unauthorised use. This is useful for situations when extension users must leave their desks temporarily. Any 4-digit code can be used to lock and unlock an extension.

This feature is also known as Electronic Station Lockout.

Conditions

- **Remote Extension Lock**
An extension assigned as the operator or manager extension can remotely lock or unlock an extension using a Direct Station Selection (DSS) Console. This feature functions only if the operator or manager has set the extension password. When the operator or manager locks an extension remotely, the extension's user cannot unlock it. When a user locks an extension, the operator or manager extension can override the lock and unlock the extension.
This feature is also known as Remote Station Lock Control.
- **TRS—Extension Lock Class**
The class of service (COS) of extensions locked by the Extension Lock or Remote Extension Lock feature can be assigned (→ TRS—Extension Lock Class [312]) so that even a locked extension can make outside (CO) line calls. The higher COS number will take precedence. If, for example, COS 3 is assigned to an extension (→ TRS-COS—Day/Night/Lunch [601-603]) and the COS of locked extensions is assigned as "4", when the extension is locked, the PBX allows the extension user to make outside (CO) line calls using COS 4.
- **Extension Lock—CANCEL ALL**
The operator or manager can cancel this feature for all extensions simultaneously.
- **Extension Lock Button**
A flexible DSS button on a DSS Console can be customised as an Extension Lock button.
- This feature also functions as Incoming Call Log Display Lock (→ 1.16.2 Incoming Call Log).
The Incoming Call Log for the common area can only be locked or unlocked by the operator and manager.
- This feature will not block Emergency Calls (→ 1.5.2.2 Emergency Call).

Feature Guide References

- 1.8.1 Toll Restriction (TRS)
- 1.18.2 Flexible Buttons

User Manual References

- 1.5.3 Preventing Other People from Using Your Telephone (Extension Lock)
- 2.1.1 Locking Other Extensions (Remote Extension Lock)
- 2.1.6 Changing System Settings Using Programming Mode
- 3.1.3 Customising the Buttons

1.8.4 Walking COS

Description

Extension users can temporarily assign their own class of service (COS) to another extension, allowing them to make calls as if from their own telephones.

This feature is useful when a manager or supervisor needs to borrow another employee's telephone to make a call. The superior enters the extension password followed by the Walking COS feature number and his or her extension number, and then makes the call. The same privileges and restrictions normally applied to a user are applied when using Walking COS.

Conditions

- When making a call with Walking COS, the extension number of the Walking COS user's extension is also logged by SMDR (→ 1.20.1 Station Message Detail Recording (SMDR)).

Feature Guide References

2.2.1 Class of Service (COS)

User Manual References

1.2.6 Using Your Calling Privileges at Another Extension (Walking COS)


2.1.6 Changing System Settings Using Programming Mode

1.9 Automatic Route Selection (ARS) Features

1.9.1 Automatic Route Selection (ARS)

Description

The PBX automatically selects the least expensive route (carrier) available at the time a long-distance call is made on an outside (CO) line that has Automatic Route Selection (ARS) enabled. In order to use ARS effectively, various ARS-related tables must be preprogrammed to tell the PBX which calls should be placed using which carriers.

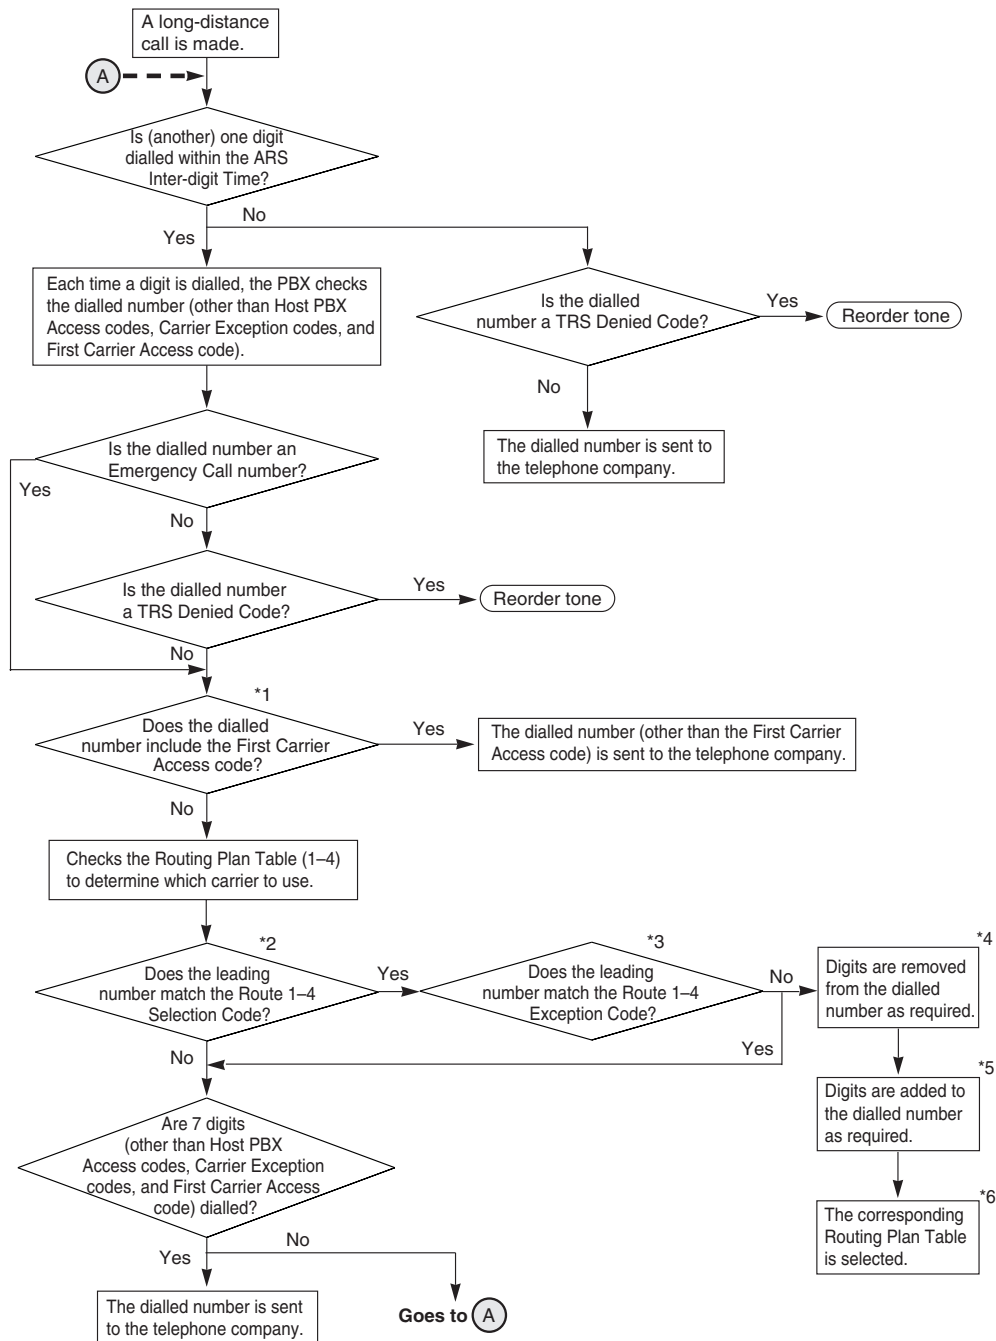[Flowchart]

1.9 Automatic Route Selection (ARS) Features

[Programming Procedures]

1. ARS Mode (→ ARS Selection [350])

Turn on ARS for each outside (CO) line.

2. First Carrier Access Code*¹

Enter the carrier's access code, such as the Host PBX Access code (→ Host PBX Access Code [403]), Carrier Exception code (→ Carrier Exception Code [300]), or First Carrier Access code (→ 1st Carrier Selection Code [359]). For example, if the dialled number is "000-93-425-9477" and the First Carrier Access code is assigned as "000", the modified number is "93-425-9477". Consult your carrier for more information.

3. Routing Plan Table

Leading Number*² (→ Route 1-4 Selection Code [351-354])

Store the leading numbers of telephone numbers that should be routed by ARS.

Leading Number Exception*³ (→ Route 1-4 Exception Code [355-358])

Store the telephone numbers that will bypass ARS here.

Note that the Outside (CO) Line Access number is always ignored by ARS and does not need to be programmed here.

Calls that are exempt from ARS are connected via the default carrier for that line.

Removed Number of Digits*⁴ (→ ARS Modification—Removed Digits [360])

There may be circumstances where the user-dialled number must be modified in order for the carrier to connect the call. In this case, store the number of digits to be removed automatically from the beginning of the dialled number here.

Added Number*⁵ (→ ARS Modification—Added Number [361])

Store the number to be added automatically to the beginning of the dialled number here.


ARS Outside (CO) Line Group*⁶ (→ ARS CO Line Group [364])

When making outside (CO) line calls using the Automatic Line Access number (9/0)*, assign the outside (CO) line group(s) for each Routing Plan number here.

An outside (CO) line belonging to the assigned outside (CO) line group(s) is automatically seized when making calls using the Automatic Line Access number, and the dialled number is applied to one of the Routing Plan numbers.

Note

* For New Zealand, the Automatic Line Access number may be either 1 or 9.

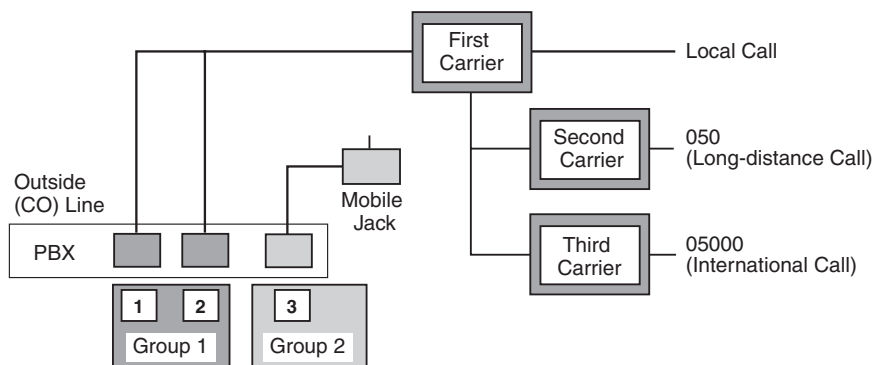

[Programming Example: Routing Plan Table]

Routing Plan No.	Leading No.*1	Leading No. Exception*2	Modification		ARS Outside (CO) Line Group*5
			Removed No. of Digits*3	Added No.*4	
1	4,5	07	0	050	All
2	9,0	07	0	050	1
3	07	Not Stored	2	05000	1
4	6	Not Stored	0	Not Stored	2

*1 → Route 1-4 Selection Code [351-354]

*2 → Route 1-4 Exception Code [355-358]

*3 → ARS Modification—Removed Digits [360]

*4 → ARS Modification—Added Number [361]

*5 → ARS CO Line Group [364]

In this example:

Dialled Number	Modified Number	Description
9-43-425-9477	050-43-425-9477	A long-distance call is made using Routing Plan 1 when the Automatic Line Access number is assigned to "9".
9-54-123-4567	050-54-123-4567	A long-distance call is made using Routing Plan 1 when the Automatic Line Access number is assigned to "9".
9-93-425-9477	050-93-425-9477	A long-distance call via outside (CO) line group 1 is made using Routing Plan 2.
9-04-123-4567	050-04-123-4567	A long-distance call via outside (CO) line group 1 is made using Routing Plan 2.
9-07-81-92-477-1450	050-00-81-92-477-1450	An international call via outside (CO) line group 1 is made using Routing Plan 3.
9-6-123456	6-123456	A mobile telephone call via outside (CO) line group 2 is made using Routing Plan 4.

4. Authorisation Code & Itemised Billing Code Table**Authorisation Code** (→ Route 1-4 Authorisation Code [381-384])

An Authorisation code for each carrier can be assigned for each outside (CO) line, if required by the carrier. The registered codes are not shown on proprietary telephone (PT) displays or System Data Dump printouts (→ System Data Dump [804]) after programming, but "Already Set" will be shown instead.

Itemised Billing Code (→ Itemised Billing Code [389])

An Itemised Billing code can be assigned for each extension. It is possible to add the Itemised Billing code assigned to an extension to the Authorisation code for the carrier for each outside (CO) line through system programming (→ Route 1-4 Itemised Billing [385-388]).

1.9 Automatic Route Selection (ARS) Features

Sequence of Transmitted Code (→ Authorisation and Itemised Billing Code Order [390])

The sequence of transmitted codes (C: Carrier Access Code; A: Authorisation Code; I: Itemised Billing Code; H: Telephone Number) can be selected. When "C.I.A.H" is selected, the dialled numbers of Itemised Billing Code (I) and Authorisation Code (A) are shown on the displays of PTs and SMDR (→ 1.20.1 Station Message Detail Recording (SMDR)).

[Programming Example: Authorisation & Itemised Billing Code Table]

Routing Plan No.	Leading No.	Modification		Authorisation Code*1	Itemised Billing*2
		Removed No. of Digits	Added No.		
1	8	0	11223344	0123456789 (on CO 1/2)	Enable (on CO 1/2) (Itemised Billing Code: Extn. 101)
2	5	0	11223344PPPP ×#012345 (PPPP: 6 s, ×#: Pulse to Tone Conversion (→ 1.5.2.4 Dial Type Selection))	67890123456 789 (on CO 1)	Enable (on CO 1) (Itemised Billing Code: Extn. 101)

*1 → Route 1-4 Authorisation Code [381-384]

*2 → Route 1-4 Itemised Billing [385-388]

In this example:

Dialled Number	Modified Number	Description
9-893-425-9477 (Extn. 101)	<p>11223344-P*2-0123456789-101-893-425-9477</p> <p>Added No. Authorisation Code Itemised Billing Code Telephone No.</p> <p>Pulse*1 (→ Dial Mode [401]) P (Pause)*2 (→ Pause Time [417])</p>	<p>A call via provider access is made using Routing Plan 1 when the Automatic Line Access number is assigned to "9".</p> <p>The Authorisation code and the Itemised Billing code are transmitted in tone mode.</p> <p>The pause time is automatically inserted before entering the Authorisation code.</p>
9-593-425-9477 (Extn. 101)	<p>11223344-PPPP-012345-P-67890123456789-101-593-425-9477</p> <p>Added No. Authorisation Code Itemised Billing Code Telephone No.</p>	<p>A call via provider access is made using Routing Plan 2 when the Automatic Line Access number is assigned to "9".</p>

Conditions

WARNING

The software contained in the ARS feature to allow user access to the network must be upgraded to recognise newly established network area codes and exchange codes as they are placed into service.

Failure to upgrade the on-premise PBXs or peripheral equipment to recognise the new codes as they are established will restrict the customer and users of the PBX from gaining access to the network and to these codes.

KEEP THE SOFTWARE UP TO DATE WITH THE LATEST DATA.

- **ARS Inter-digit Time**

The inter-digit time used while the PBX is checking the dialled number for the ARS feature can be specified through system programming (→ ARS Inter-digit Time [363]).

- **TRS**

TRS checks are performed before ARS number modification, so programme TRS Denied Code Tables and Exception Code Tables accordingly (→ 1.8.1 Toll Restriction (TRS)).

- If an extension user makes calls using the Automatic Line Access number, and the leading number of a dialled telephone number does not match any entries found in the Leading Number, an outside (CO) line enabled in Automatic Designated Line Access [419] is automatically seized.
- The PBX checks the number repeatedly until 7 digits have been dialled.
- If an extension user makes an outside (CO) line call by directly pressing a Single-CO (S-CO), Group-CO (G-CO), or Other-CO (O-CO) button or by dialling an assigned Outside (CO) Line Group Access number, and the seized outside (CO) line has been enabled in ARS Selection [350], the call is made with the ARS feature.

1.10 Conversation Features

1.10.1 Hands-free Operation

Description

A proprietary telephone (PT) user can talk to another party without lifting the handset. Pressing specific buttons automatically activates hands-free mode.

Conditions

- **PTs with the MONITOR Button**
PTs with the MONITOR button can dial in hands-free mode but cannot have hands-free conversations.
- Hands-free mode is cancelled if an extension user does not start dialling within 10 seconds.
- This feature can be used by pressing the following buttons when the indicator of the SP-PHONE/ MONITOR button is off:
 - SP-PHONE button
 - MONITOR button
 - INTERCOM button
 - CO button

User Manual References

1.4.8 Talking to Another Party without Lifting the Handset (Hands-free Operation)

1.10.2 Room Monitor

Description

An extension user can monitor a room or a door through another proprietary telephone (PT) or a doorphone without the destination party knowing.

Conditions

- To monitor using this feature, an extension must have a PT with an AUTO ANS/MUTE button or a single line telephone (SLT) with a MUTE button. To be monitored using this feature, an extension must have a PT with an AUTO ANS/MUTE button.
- System programming determines the extensions that can be monitored using this feature (→ Room Monitor [612]).
- A doorphone access tone will be sent to a monitored doorphone before monitoring starts (→ 1.15.1 Doorphone Call). If an extension user wants to monitor a doorphone without informing the other party, it is possible to eliminate the tone through system programming (→ Doorphone Access Tone [707]).
- Access tones will not be sent to a monitored PT. Paging tones will also not be received by a monitored PT.

User Manual References

1.7.9 Monitoring a Room (Room Monitor)

1.10.3 Microphone Mute

Description

During a conversation, a proprietary telephone (PT) user can disable the built-in microphone to consult privately with others in the room while listening to the other party on the phone through the built-in speaker. When Microphone Mute is active, the user can hear the other party's voice, but the user's voice is muted.

Conditions

- This feature is only available on PTs that have an AUTO ANS/MUTE button.

User Manual References

1.4.6 Muting a Microphone (Microphone Mute)

1.10.4 Headset Operation

Description

This PBX supports headset-compatible proprietary telephones (PTs). A PT user can talk to another party without lifting the handset by using an optional headset.

For connection and operation, refer to the Operating Instructions for the headset.

This feature is also known as Handset/Headset Selection.

Conditions

- Headset users cannot use the Automatic Redial feature (→ 1.6.1.4 Redial).
- To set headset mode on a PT, use the handset/headset selector located on the telephone and/or on the headset.
- If headset mode is on, pressing the SP-PHONE button activates the headset, not the built-in speaker.

User Manual References

1.4.7 Using the Headset (Headset Operation)

1.10.5 Data Line Security

Description

Once Data Line Security is set on an extension, communication between the extension and the other party is protected from signals such as Call Waiting, Hold Recall, and Executive Busy Override. Extensions that have devices such as modems, fax machines, or Voice Processing Systems (VPSs) connected to them may set this feature to maintain secure data transmission, by blocking tones or other interruptions during communication.

User Manual References

1.7.6 Protecting Your Line against Notification Tones (Data Line Security)

1.10.6 Flash/Recall

Description

A proprietary telephone (PT) user can use the FLASH/RECALL button to disconnect the current call and start another call without hanging up. For example, if this button is used to disconnect an outside (CO) line, the extension user will hear a new dial tone from the same outside (CO) line.

Conditions

- **FLASH/RECALL Button Mode**
One of the following modes can be selected through system programming (→ Flash/Recall Key Mode [110]):
 - a) **MODE 1: EFA mode** (→ 1.10.7 External Feature Access (EFA))
An EFA signal is sent for the specified duration (→ Flash/Recall Time [418]).
 - b) **MODE 2: Flash/Recall mode**
A flash/recall signal is sent when the FLASH/RECALL button is pressed if the length of time that the button is pressed is longer than the specified duration (→ Flash/Recall Time [418]). If the length of time that the button is pressed is shorter than the specified duration, an EFA signal will be sent for the specified duration.
- This feature functions only if the FLASH/RECALL button is set to "MODE 2: Flash/Recall mode".
- **Disconnect Time**
The amount of time between successive accesses to the same outside (CO) line is programmable for each outside (CO) line (→ Disconnect Time [422]).
- Pressing the FLASH/RECALL button restarts the conversation duration, outputs an SMDR call record (→ 1.20.1 Station Message Detail Recording (SMDR)) and checks the Toll Restriction (TRS) class of service (COS) number again. The notation "F/" will be logged along with the new dial number on SMDR.

1.10.7 External Feature Access (EFA)

Description

An extension user can access features of a host PBX or the telephone company, such as Call Waiting. An EFA (External Feature Access) signal is sent to the host PBX or the telephone company. This feature is only available during outside (CO) line calls, including Host PBX Access (→ 1.5.2.7 Host PBX Access Code (Access Code to the Telephone Company from a Host PBX)).

Conditions

- This feature functions only if the FLASH/RECALL button is set to "MODE 1: EFA mode" (→ 1.10.6 Flash/Recall). It is also possible to perform this feature by entering the EFA feature number when the current call is placed on consultation hold (→ 1.12.5 Consultation Hold).
- **Flash/Recall Time**
The length of an EFA signal can be selected for each outside (CO) line (→ Flash/Recall Time [418]).

User Manual References

1.8.2 If a Host PBX is Connected

1.10.8 Outside (CO) Line Call Limitation

Description

Outside (CO) line calls are limited by the following features:

Feature	Description
Extension-to-Outside (CO) Line Call Duration	When a call between an extension user and an outside party is established, the call duration is restricted by a timer (→ Extension-to-CO Line Call Duration [212]). Both parties will hear a warning tone at 5-second intervals 15 seconds before the timer expires. When the timer expires, the call is disconnected. System programming determines which extensions have calls limited by this feature (→ CO Line Call Duration Limitation [613]). This timer applies to outside (CO) line calls that are made via the PBX.
Outside-to-Outside (CO-to-CO) Line Call Duration	When a call between 2 outside parties is established, the call duration is restricted by a timer (→ CO-to-CO Line Call Duration [205]). Both parties will hear a warning tone 15 seconds before the timer expires. When the timer expires, the call is disconnected.

Conditions

- **Lockout**
If one party in a conversation goes on-hook, the call between both parties will be disconnected. A reorder tone is sent to the off-hook party before the call is disconnected. No operation is necessary.
- When an extension user seizes an outside (CO) line and then transfers the call to another extension user who can use this feature, the Extension-to-Outside (CO) Line Call Duration timer starts after the transferred call is answered by the outside party.
- The Outside-to-Outside (CO-to-CO) Line Call Duration feature applies to the following calls:
 - Calls forwarded by the FWD to Outside (CO) Line feature (→ 1.3.1.2 Call Forwarding (FWD))
 - Calls transferred by the Call Transfer to Outside (CO) Line feature (→ 1.11.1 Call Transfer)
 - Calls using the DISA feature (→ 1.15.6 Direct Inward System Access (DISA))
 - Calls using the Unattended Conference feature (→ 1.13.1.2 Conference)

1.10.9 Paralleled Telephone

Description

Any proprietary telephone (PT) can be connected in parallel with a single line device, such as a single line telephone (SLT), fax machine, or modem.

When parallel mode is used, the 2 telephones function as follows:

- Both share one extension number.
- Either telephone or device can make or answer calls.

Conditions

- System programming determines the SLTs that can be connected in parallel with a PT (→ Paralleled Telephone [610]).
- When the SLT is in operation, the display and LED (Light Emitting Diode) indicator on the paired PT will function in the same way as when the PT is in operation.
- The following features cannot be used with an SLT connected in parallel with a PT:
 - Call Splitting
 - Conference
 - Door Open while connected to the doorphone
 - External Feature Access (EFA)
 - Hot Line
- An SLT connected in parallel with a PT will not ring if the PT is:
 - In Hands-free Answerback mode (→ 1.4.1.4 Hands-free Answerback).
 - In Voice-calling mode (Alternate Receiving—Ring/Voice) (→ 1.5.1.1 Intercom Call).
- An extension user cannot make a call from the SLT if the PT is:
 - Playing background music (BGM)
 - Receiving a paging announcement over the built-in speaker
 - In programming mode
- Both the PT and the SLT will ring for incoming calls (if the ringer is turned on).
- If one telephone goes off-hook while the other telephone is having a call, a 3-party conference call will be established. If one telephone goes on-hook, the other telephone will continue with the call.

Installation Manual References

2.5.2 Connecting Extensions in Parallel

1.10.10 Calling Party Control (CPC) Signal Detection

Description

A CPC (Calling Party Control) signal is an on-hook indication (disconnect signal) sent from an outside (CO) line when the other party hangs up. To maintain efficient utilisation of outside (CO) lines, the PBX monitors each line's status and when a CPC signal is detected on a line, the PBX disconnects the line and alerts the extension with a reorder tone.

Conditions

- CPC Signal Detection is programmable for incoming outside (CO) line calls (→ CPC Signal Detection—Incoming [420]) and for outgoing outside (CO) line calls (→ CPC Signal Detection—Outgoing [421]).
- If a CPC signal is detected during a call between a caller using the DISA feature (→ 1.15.6 Direct Inward System Access (DISA)) and an extension or an outside party, the call will be disconnected.
- It is possible to select whether the PBX detects the reverse signal from incoming outside (CO) line calls for the duration (→ CPC Signal Detection—Incoming [420]) specified through system programming (→ Incoming Reverse [153]).

1.11 Transferring Features

1.11.1 Call Transfer

Description

An extension user can transfer a call to another extension or to an outside party. The following features are available:

Feature	Transferring method
With Announcement	Transfer is completed after announcing the transfer to the destination party.
Without Announcement	Transfer is completed without an announcement. After dialling the destination extension number and hearing a ringback tone or busy tone, the originator can replace the handset.

Call Transfer with Announcement is also known as Call Transfer—Screened.

Call Transfer without Announcement is also known as Call Transfer—Unscreened.

Conditions

- System programming determines the extensions that are able to transfer calls to an outside party (→ Call Transfer to CO Line [606]). Single line telephone (SLT) users cannot transfer calls to an outside party.
- Transfer Recall for Call Transfer without Announcement**
If the transfer destination extension does not answer within a preprogrammed time period (→ Transfer Recall Time [201]), the call will return to the extension that transferred the call. If there is no answer for 30 minutes after Transfer Recall starts, the call will be disconnected.
- Camp-on Transfer for Call Transfer without Announcement**
Call Transfer without Announcement is possible while hearing a busy tone, or while hearing a ringback tone after executing Busy Station Signalling (BSS). When the destination extension becomes idle, the transferred call starts ringing automatically at that extension. This is called Camp-on Transfer.
- One-touch Transfer**
Direct Station Selection (DSS) Console users and proprietary telephone (PT) users can hold an outside (CO) line call and quickly transfer it to an extension by pressing the DSS button directly (→ One-touch Transfer Using a DSS Button [005]).
A flexible CO/DSS/MESSAGE button can also be customised as a DSS button.
- Music, if available, is sent to the held outside party while the call is being transferred (→ 1.12.4 Music on Hold). An internal audio source, external audio source, or tone can be selected as the Music on Hold through system programming (→ Music on Hold [111]).
- Outside (CO) Line Call Duration**
If an outside (CO) line call is transferred to an outside party, the call duration will be restricted by a system timer (→ CO-to-CO Line Call Duration [205]). Both parties will hear a warning tone 15 seconds before the timer expires (→ 1.10.8 Outside (CO) Line Call Limitation). The extension that transferred the call will also hear a ring tone or an alarm tone 50 seconds before the timer expires (→ 1.12.1 Call Hold). When the timer expires, the call is disconnected unless the extension joins the conversation again.
- If a CPC (Calling Party Control) signal or reverse signal is received from an outside (CO) line, the corresponding call between 2 outside parties will be disconnected.

- **Consultation Hold**

When a transferring party presses the TRANSFER button on a PT or the Recall/hookswitch on an SLT, the transferred party is automatically placed on consultation hold (→ 1.12.5 Consultation Hold).

Feature Guide References

1.18.2 Flexible Buttons

User Manual References

1.4.1 Transferring a Call (Call Transfer)

1.12 Holding Features

1.12.1 Call Hold

Description

An extension user can put a call on hold. The following Call Hold features are available:

Feature	Description
General Call Hold	Any extension user can retrieve a held call.
Exclusive Call Hold	Only the proprietary telephone (PT) user who held the call can retrieve it.

Pressing the HOLD button multiple times alternates between General and Exclusive Call Hold.

Conditions

- Using the Call Hold feature, a PT user can have one intercom call and multiple outside (CO) line calls on hold at the same time. To hold multiple intercom calls, the user should use the Call Park feature (→ 1.12.2 Call Park). Using the Call Hold feature, a single line telephone (SLT) user can have either one intercom call or one outside (CO) line call on hold. To hold multiple calls, the user should use the Call Park feature.
- If an outside party is placed on hold and the call is not retrieved within 30 minutes, the call is automatically disconnected.
- Music on Hold**
Music, if available, is sent to the outside party on hold (→ 1.12.4 Music on Hold). An internal audio source, external audio source, or tone can be selected as the Music on Hold through system programming (→ Music on Hold [111]).
- Doorphone calls cannot be put on hold.
- Hold Recall**
If a call on hold is not retrieved within a preprogrammed time period (→ Hold Recall Time [200]), a ring tone will be heard at the extension that put the call on hold. If the extension is engaged in a call when the timer expires, an alarm tone will be heard. If the hold recall time is set to "Disable", no tone will be heard. Going off-hook after the hold recall time has expired automatically re-establishes the conversation with the call on hold.
- SLT Hold Mode**
It is possible to choose how to hold and transfer a call with an SLT, if the length of time that the Recall/hookswitch is pressed is shorter than a specified duration (→ Hookswitch Flash Timing Range [207]). The following methods (→ SLT Hold Mode [104]) are available:

Mode	Hold	Transfer to Extension
Hold-1	Pressing the Recall/hookswitch + Going on-hook	Pressing the Recall/hookswitch + Extension No.

Mode	Hold	Transfer to Extension
Hold-2	Pressing the Recall/hookswitch + Call Hold Feature No. + Going on-hook	Pressing the Recall/hookswitch + Extension No.
Hold-3	Pressing the Recall/hookswitch + Call Hold Feature No. + Going on-hook	Pressing the Recall/hookswitch + Call Hold Feature No. + Extension No.

In some cases, a call is not disconnected when an SLT user goes on-hook. Instead, the call is mistakenly placed on hold. After a specified time expires, the Hold Recall tone is heard. When the SLT user answers this, the user hears a cyclic tone (like a reorder tone). To avoid this problem, select "Hold-2" or "Hold-3". In either of these modes, all calls are disconnected when going on-hook, unless the Call Hold feature number is entered after pressing the Recall/hookswitch.

It is possible to set each SLT not to receive pulse signals through system programming (→ Internal Pulse Detection [614]). This setting helps the PBX to avoid mistaking pulse signals sent by dialling "1" for hooking, in the countries/areas where the length of time that the Recall/hookswitch is pressed is set to "MODE 1: 50–180 ms" in Hookswitch Flash Timing Range [207].

Feature Guide References

4.2.1 Tones/Ring Tones

User Manual References

1.4.2 Holding a Call

1.12.2 Call Park

Description

An extension user can hold a call by placing it into a common parking zone of the PBX. A parked call can be retrieved by any extension user. This feature is useful when an extension user wants to hold more than one intercom call with a proprietary telephone (PT), or more than one intercom call or outside (CO) line call with a single line telephone (SLT).

Conditions

- **Call Park Recall**
If a parked call is not retrieved within a preprogrammed time period (→ Hold Recall Time [200]), a ring tone will be heard at the extension that parked the call. If the destination is engaged in a call when the timer expires, an alarm tone will be heard.
- If a parked call is not retrieved within 30 minutes, it is automatically disconnected.
- **Retry**
If the specified parking zone is occupied, the extension user will hear a busy tone. While hearing a busy tone, the user can retry by selecting another parking zone.

User Manual References

1.4.2 Holding a Call

1.12.3 Call Splitting

Description

An extension user can speak alternately with 2 parties. Placing the current call on hold allows the user to speak with the other party.

Conditions

- This feature does not apply to calls from doorphones or paging announcements.
- **Consultation Hold**
When the extension user presses the HOLD button on a proprietary telephone (PT) or the Recall/hookswitch on a single line telephone (SLT), the held party is automatically placed on consultation hold (→ 1.12.5 Consultation Hold).

User Manual References

1.4.3 Talking to 2 Parties Alternately (Call Splitting)

1.12.4 Music on Hold

Description

An outside party on hold will hear audio to inform the party that the call is still on hold. The following types of audio are available depending on the user's country/area:

- a) Internal audio source
- b) External audio source
- c) Tone

The audio sources (internal and external) can also be used for BGM (→ 1.15.4 Background Music (BGM)).

Conditions

- **Hardware requirement:** A user-supplied audio device, such as a CD player or radio for External audio source.
- The audio can be selected through system programming (→ Music on Hold [111]).
- Operations such as Call Hold (→ 1.12.1 Call Hold) and Call Transfer (→ 1.11.1 Call Transfer) activate Music on Hold.

Installation Manual References

2.8.1 Connecting Peripherals

1.12.5 Consultation Hold

Description

When an extension user is on a call and performs Call Transfer (→ 1.11.1 Call Transfer), Call Splitting (→ 1.12.3 Call Splitting), or tries to establish a conference call (→ 1.13.1.2 Conference), the call is automatically placed on consultation hold. When the operation is completed or cancelled, the consultation hold is released.

1.13 Conference Features

1.13.1 Conference Features

1.13.1.1 Conference Features—OVERVIEW

Description

The following features are available to establish a conference call:

Feature	Description	Details in
Conference	An extension user can establish a 3-party or 5-party conference call.	• 1.13.1.2 Conference
Executive Busy Override	An extension user can interrupt an existing call to establish a 3-party conference call.	• 1.7.2 Executive Busy Override

1.13.1.2 Conference

Description

An extension user can establish a conference call. The following Conference features are available:

Feature	Description
3-party Conference	During a 2-party conversation, an extension user can add a third party to the conversation, thereby establishing a 3-party conference call. Unattended Conference: The proprietary telephone (PT) user who originated a conference with 2 outside parties can leave the conference and allow the other parties to continue the conversation. The user may return to the conference at any time, if he or she desires.
5-party Conference	A PT user can establish a 3-party to 5-party conference call by entering the 5-party Conference feature number.

Conditions

[General]

- **Conference call arrangement**
The following configurations of 3-party or 5-party conference calls are possible at the same time through system programming (→ Conference Pattern [116]):
 - 3-party conference calls between 3 extensions: Up to 3
 - 3-party conference calls between one extension and 2 outside parties: Up to 4
 - 3-party conference calls between 2 extensions and one outside party: Up to 4
 - 5-party conference call with up to 3 extensions when using Voice Mail Inband (DTMF) Integration, with up to 4 extensions when not using Voice Mail Inband (DTMF) Integration, or with a combination of extensions and up to 2 outside parties: One
- **Conference Button**
On a PT that does not have a CONF (Conference) button, a flexible CO button can be customised as a Conference button.
- **Consultation Hold**
When an extension user tries to establish a conference call, the current call is automatically placed on consultation hold until the conference is established (→ 1.12.5 Consultation Hold).

[3-party Conference]

- A confirmation tone will be sent to all parties when a 2-party conference call is changed to a 3-party conference call. It is possible to eliminate the tone through system programming (→ Conference Tone [105]).
- **Unattended Conference Recall**
The duration of unattended conferences is restricted by a system timer (→ CO-to-CO Line Call Duration [205]).
A ring tone or an alarm tone is heard at the conference originator's extension 50 seconds before the timer expires.
A warning tone starts to be heard by parties in the unattended conference 15 seconds before the timer expires.
If the originator returns to the conference before the unattended conference call is disconnected, the

1.13 Conference Features

timer will be cancelled. If not, the ring tone or alarm tone and the warning tone will continue to be heard until the unattended conference call is disconnected (→ 1.10.8 Outside (CO) Line Call Limitation).

- An unattended conference cannot be established unless the extension is allowed to transfer a call to an outside party through system programming (→ Call Transfer to CO Line [606]).

[5-party Conference]

- The following features will not function during a 5-party conference call:
 - Call Hold
 - Call Park
 - Call Splitting
 - Call Transfer
 - Executive Busy Override
 - Unattended Conference
- A confirmation tone will be sent to all parties when a 5-party conference call is established and when a 5-party conference call is changed to a 4-party conference call or vice versa. It is possible to eliminate the tone through system programming (→ Conference Tone [105]).

Feature Guide References

1.18.1 Fixed Buttons

1.18.2 Flexible Buttons

User Manual References

1.4.5 Talking to Multiple Parties (Conference)

1.14 Paging Features

1.14.1 Paging

Description

An extension user can make a paging announcement to several people at once. The announcement is heard through the built-in speakers of proprietary telephones (PTs) and/or an external pager (loudspeaker), depending on the type of Paging that is performed as follows:

Type	Paging method
All Extensions	The page is heard through the built-in speakers of all PTs.
External	The page is heard through an external pager.
Group	The page is heard through the built-in speakers of the PTs that belong to a certain extension group (→ Extension Group [600]).
All Extensions & External	The page is heard through the built-in speakers of all PTs and an external pager simultaneously.

The paged person can answer the page from a nearby telephone. It is possible to page with a call on hold in order to transfer the call.

Paging Deny

It is possible for each extension to deny being paged.

Conditions

- **Hardware Requirement:** A user-supplied external pager.
- A confirmation tone will be sent to the external pager before the paging announcement. It is possible to eliminate the tone through system programming (→ External Pager Access Tone [106]).
- Only one person can use this feature at a time.
- Extensions that cannot be paged are:
 - Ringing or busy PTs
 - PTs in Paging Deny mode
 - PTs in DND mode (→ 1.3.1.3 Do Not Disturb (DND))

Installation Manual References

2.8.1 Connecting Peripherals

User Manual References

1.6.1 Paging

1.6.2 Answering/Denying a Paging Announcement

1.15 Optional Device Features

1.15.1 Doorphone Call

Description

A visitor can use a doorphone to call its preprogrammed destination. Extension users can call a doorphone. Doorphones can also be used for the Room Monitor feature (→ 1.10.2 Room Monitor).

Conditions

- **Hardware Requirement:** An optional doorphone, and doorphone card.
- A doorphone access tone will be sent to a monitored doorphone before monitoring starts. If an extension user wants to monitor a doorphone without informing the other party, it is possible to eliminate the tone through system programming (→ Doorphone Access Tone [707]).
- **Ring Duration**
If an incoming doorphone call is not answered within a preprogrammed time period (→ Doorphone Ring Time [708]), ringing stops and the call is cancelled.
An extension user can choose the preferred ring tone pattern for doorphone calls through system programming (→ Doorphone Ring Tone Pattern [706]).
- **Call Destination**
System programming determines the extensions that can receive calls from each doorphone for each time service mode (→ Doorphone Ringing—Day/Night/Lunch [700-702]).
- **Door Open**
While on a doorphone call, an extension user can unlock the door to let the visitor in (→ 1.15.2 Door Open).
- When a doorphone call is received at a proprietary telephone (PT), a tone is heard instead of ringing.

Installation Manual References

- 2.3.3 2-Port Doorphone Card (KX-TE82460)
- 2.6 Connecting Doorphones and Door Openers

Feature Guide References

- 4.2.1 Tones/Ring Tones

User Manual References

- 1.8.1 If a Doorphone/Door Opener is Connected

1.15.2 Door Open

Description

Using an extension telephone, an extension user can unlock a door for a visitor.

The door can be unlocked by extension users who are allowed through system programming to unlock the door for each time service mode (→ Door Opener—Day/Night/Lunch [703-705]). While on a doorphone call, any extension user can unlock a door to let a visitor in (→ 1.15.1 Doorphone Call).

Conditions

- **Hardware Requirement:** A user-supplied door opener installed on each door, optional doorphone, and doorphone card.
- A door opener can unlock a door even if no doorphone is installed.
- **Door Open Duration**
An opened door will remain unlocked for a preprogrammed length of time (→ Door Open Duration [709]).

Installation Manual References

2.3.3 2-Port Doorphone Card (KX-TE82460)

2.6 Connecting Doorphones and Door Openers

User Manual References

1.8.1 If a Doorphone/Door Opener is Connected

1.15.3 Doorbell/Door Chime

Description

Extension users can choose how their telephones receive doorphone calls, by selecting to hear ringing, a chime, or both, provided a doorbell/door chime connected to a door opener is connected to the PBX. They can recognise which doorphone is ringing by selecting a different doorphone chime pattern for each doorphone.

[Programming Example]

In order for an extension connected to extension jack 01 (extension 101) to be able to receive a doorphone call from a doorbell/door chime connected to Relay 2, programme as follows:

Programming	Doorphone	
	1	2
Doorphone Ringing* ¹	Enable (extrn. 101)	Enable (extrn. 101)
Doorphone Ring/Chime* ²	Chime	Chime
Doorphone Chime Assignment* ³	Relay 2	Relay 2
Doorphone Chime Pattern* ⁴	Pattern 1	Pattern 2

*¹ → Doorphone Ringing—Day/Night/Lunch [700-702]

*² → Doorphone Ring/Chime [710]

*³ → Doorphone Chime Assignment [711]

*⁴ → Doorphone Chime Pattern [712]

In this example

When a visitor presses the Call button of Doorphone 2:

- A doorbell/door chime, connected to Relay 2, chimes with Pattern 2.
- Because Doorphone Ring/Chime is set to "Chime", extension 101 does not ring.
- The extension user who is allowed to receive a call from Doorphone 2 can answer the doorphone call by going off-hook within a preprogrammed time period (→ Doorphone Ring Time [708]). If the user is allowed to unlock the door (→ Door Opener—Day/Night/Lunch [703-705]), he or she can then unlock the door by entering the Door Open feature number.
- If the called extension is busy and has set Call Waiting, the extension user hears a call waiting tone and the call information flashes on the display.

Conditions

- **Hardware Requirement:** A user-supplied doorbell/door chime connected to each door opener.

Installation Manual References

2.7 Connecting Doorbell or Door Chime

Feature Guide References

4.2.1 Tones/Ring Tones

User Manual References

1.8.1 If a Doorphone/Door Opener is Connected

1.15.4 Background Music (BGM)

Description

A proprietary telephone (PT) user can listen to background music (BGM) through the built-in speaker while on-hook and idle.

Conditions

- **Hardware requirement:** A user-supplied external audio device, such as a CD player or radio for External audio source.
- The music heard through the PT is interrupted when going off-hook, receiving a call, or receiving a paging announcement.
- The audio can be selected through system programming (→ Music on Hold [111]).
- This feature can be turned on and off by dialling "1" while the extension is on-hook and idle, if BGM is enabled through system programming (→ BGM Control for APT [626]).

Installation Manual References

2.8.1 Connecting Peripherals

User Manual References

1.7.5 Turning on the Background Music (BGM)

1.15.5 Outgoing Message (OGM) for DISA/UCD

Description

An extension assigned as the operator or manager extension can record outgoing messages (OGMs) for the following features:

Feature	Usage	Details in
Direct Inward System Access (DISA)	When a call arrives on a DISA line, the caller will hear a DISA OGM.	• 1.15.6 Direct Inward System Access (DISA)
3-level Automated Attendant (AA)	When the DISA AA service is active, the caller will hear a DISA OGM. The DISA AA service supports up to 3 levels of DISA OGMs.	• 1.15.6 Direct Inward System Access (DISA)
Uniform Call Distribution (UCD)	When a call arrives at a UCD group and all extensions in the group are busy, the caller will hear a UCD OGM (→ UCD Waiting Message [527]).	• 1.2.2 Uniform Call Distribution (UCD)

Conditions

- To use this feature, "DISA" or "UCD" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]).
- The operator or manager can record a maximum of 32 messages (8 messages for DISA/UCD and 24 messages for 3-level AA).
- After recording messages, the operator or manager can also play them back for confirmation. In addition, the operator or manager can erase messages for DISA/UCD.
- When the operator or manager tries to record or play back a message, he or she will hear an alarm tone if the message channel is in use.
- When a call between 2 outside parties is established or when Automatic Configuration for Outside (CO) Line Type is being executed, the operator or manager cannot record or play back a message.
- Prerecorded messages will not be cleared by a system restart. To clear them, use system programming (→ Clear All OGMs of DISA/UCD [599]).

User Manual References

2.1.6 Changing System Settings Using Programming Mode

1.15.6 Direct Inward System Access (DISA)

Description

Direct Inward System Access (DISA) allows outside callers to be connected to their desired PBX destinations without the use of the operator. Callers can listen to a DISA outgoing message (OGM) instructing them as to which numbers to dial to be connected to the person or department they would like to speak with. DISA can also give PBX users access to PBX features, such as making outside (CO) line calls, when they are outside the office.

This DISA OGM can guide callers and allow them to:

- Call an extension by dialling the extension number.
- Call another outside party via the outside (CO) lines of the PBX.
- Access the desired extension simply by dialling a single-digit number (DISA Automated Attendant [AA] number) using DISA AA service.

DISA OGM

When a call arrives on a DISA line, callers will hear a DISA OGM or a short beep. When the DISA AA service is active, this DISA OGM will direct callers to dial the appropriate digit (DISA AA number) to be connected to a specified destination. To access other PBX features, such as making intercom or outside (CO) line calls, the caller may dial the appropriate numbers while the DISA OGM is playing.

An extension assigned as the operator or manager extension can record a DISA OGM (→ 1.15.5 Outgoing Message (OGM) for DISA/UCD).

DISA AA Service

DISA AA service allows a caller to dial a single-digit number (DISA AA number) and be connected to the desired party automatically. The PBX can store up to 10 destinations that can be called by dialling a DISA AA number (0–9) for each DISA OGM (→ DISA Built-in AA [501]). These destinations can be an extension number (→ Extension Number [009]), an extension group number (→ Extension Group [600]), or the DISA AA number of a 3-level DISA OGM (→ 3-level AA Assignment [540-549]).

During or after the DISA OGM announcement (→ DISA Wait Time after OGM [505]), or after a short beep (→ Intercept Time for Internal DISA [515]), the caller may dial a DISA AA number as directed by the DISA OGM (e.g., "Press 1 to speak to Sales. Press 2 to speak to Support.").

Each DISA AA number directs the call to a preprogrammed location.

Since DISA AA numbers are single digits, if the caller dials a second digit within a preprogrammed time period (→ DISA AA Wait Time [517]), DISA AA service will be bypassed because the PBX will assume the caller is trying to access a specific feature.

When the DISA AA service is used, Incoming Dial Mode must be set to "With AA" through system programming (→ DISA Incoming Call Dial Mode [500]). When "With AA" is selected, the PBX regards caller-dialled digits "0" through "9" as DISA AA numbers. If no destination is assigned to "9" or "0", the PBX regards the number (9/0)* as the Automatic Line Access number (→ Automatic Line Access [121]) or Operator Call number.

Note

* For New Zealand, the Automatic Line Access number may be either 1 or 9.

[Programming Example: 1-level (DISA) AA Table]

In order for a caller to be able to access Mike Smith (extension 102) using 1-level (DISA) AA, programme as follows:

Outside (CO) Line No.	Distribution method*1		
	Day	Lunch	Night
1	DISA OGM1	DISA OGM1	DISA OGM1
2, 3	Normal	Normal	Normal

DISA AA No. for 1-level AA*2									
0	1	2	3	4	5	6	7	8	9
—	Mike Smith (102)	Extn. 103	Extn. 104	Extn. 105	Extn. 106	Extn. 107	Extn. 108	Extn. Group 1	—

*1 → CO Line Mode—Day/Night/Lunch [414-416]

*2 → DISA Built-in AA [501]

[Programming Example: 3-level AA Table]

In order for a caller to be able to access Mike Smith of the Software Support Team (extension 102) using 3-level AA, programme as follows:

Outside (CO) Line No.	Distribution method*1		
	Day	Lunch	Night
1–3	DISA OGM1	DISA OGM2	DISA OGM3

1.15 Optional Device Features

1-level AA

DISA AA No.*2									
0	1	2	3	4	5	6	7	8	9
–	Extn. Group 1	Extn. Group 2	2-level AA*3	–	–	–	–	–	–

2-level AA

DISA AA No.*4						
0	1	2	3	4	5	6
–	Extn. Group 3	3-level AA*5	Extn. Group 4	–	–	–

3-level AA

DISA AA No.*4						
0	1	2	3	4	5	6
Extn. 101	Mike Smith (102)*6	–	–	–	–	–

*1 → CO Line Mode—Day/Night/Lunch [414-416]

*2 → DISA Built-in AA [501]

*3 2-level AA: Select "3-level AA" for AA number "3" in DISA Built-in AA [501]

*4 → 3-level AA Assignment [540-549]

*5 3-level AA: Select "3-level AA" for "second AA number 2" and for "third AA number ×" in the [543] of 3-level AA Assignment [540-549]

*6 Mike Smith (102): Select "Jack 02" for "second AA number 2" and for "third AA number 1" in the [543] of 3-level AA Assignment [540-549]

In this example:

- 1) After or while listening to the AA first-level DISA OGM (e.g., "Press 1 to speak to Sales. Press 2 to speak to Service. Press 3 to speak to Support."), caller dials a DISA AA number, "3", as directed by the DISA OGM.
- 2) Next, the AA second-level DISA OGM (e.g., "Press 1 to speak to Hardware Team. Press 2 to speak to Software Team.") directs the caller to dial another DISA AA number. The caller dials "2".
- 3) Finally, the AA third-level DISA OGM (e.g., "Press 1 to speak to Mike Smith. Press 0 to speak to the Operator.") directs the caller to dial a DISA AA number, "1", to be connected to a specified destination, extension 102.

Note

When the type of a destination from 2-level AA or 3-level AA to another setting is changed, any associated DISA OGM will also be cleared. In addition, any items within the AA menu being removed will also be removed.

DISA Busy Mode

If the destination of a DISA call is busy, the call will be redirected to an idle extension (→ Hunting Group Set [100]) in the destination's idle extension hunting group (→ 1.2.1 Idle Extension Hunting). If no extension in the group is available, or if the destination of the DISA call is not a member of an idle extension hunting group, the call will be handled in one of the following ways, according to system programming (→ DISA Busy Mode [506]):

- a) **Disconnect:** The caller hears a busy tone and the call is disconnected.
- b) **Call Waiting:** The called extension hears a call waiting tone if the extension has set Call Waiting.
- c) **DISA:** The following procedure is performed:
 - 1) If the assigned DISA OGM (busy message) has been recorded, the caller hears the DISA OGM (e.g., "The party you called is unavailable..."). If the assigned DISA OGM has not been recorded, the caller hears a busy tone and the call is disconnected.
 - 2) After the busy message has been played, the DISA OGM that was sent before the busy message is sent to the caller again.
 - 3) The PBX waits for the caller to enter a new destination. In this case, the PBX does not accept any Outside Line Access number regardless of the security type.

If the destination is a member of a DISA ring group, DISA Busy Mode will not function for the call. The PBX regards it as unanswered.

DISA Intercept Mode

If the destination of a DISA call does not answer the call within a preprogrammed time period (→ DISA Ring Time before Intercept [508]), the call will be handled in one of the following ways, according to system programming (→ DISA Intercept Mode [507]):

- a) **Disconnect:** The call is disconnected.
- b) **Intercept:** The call is redirected to preprogrammed intercept destinations (→ Flexible Ringing—Day/Night/Lunch [408-410]).
This is useful for business calls. For example, the call can be forwarded to the operator or a Voice Processing System (VPS) automatically.

DISA No Dial Mode

If the PBX does not receive either DTMF (Dual Tone Multi-Frequency) signals or a fax (CNG) tone within a preprogrammed time period (→ DISA Wait Time after OGM [505]), or if the PBX does not receive DTMF signals within a preprogrammed time period (→ Intercept Time for Internal DISA [515]), the call will be handled in one of the following ways, according to system programming (→ DISA No Dial Mode [510]):

- a) **Disconnect:** The call is disconnected.
- b) **Intercept:** The call is redirected to preprogrammed intercept destinations (→ Flexible Ringing—Day/Night/Lunch [408-410]).

DISA Security Mode

Security can be enabled for the PBX to control the types of calls that can be made by callers using DISA. When the DISA security mode is set to "All Security" or "Trunk Security" (→ DISA Security Mode [511]), a caller is required to enter a DISA security code (→ DISA Security Code [512]) before making intercom and outside (CO) line calls, or outside (CO) line calls only, respectively. The DISA security code and the number of digits required for the DISA security code (→ DISA Security Code Digits [530]) can be assigned by the manager. After entering a DISA security code, if the code is the same as one of the preprogrammed security codes, the caller will hear a short beep. It is possible to eliminate the tone through system programming (→ DISA Tone after Security Code [518]).

If the DISA security code is entered incorrectly 3 times when using DISA, a reorder tone will be sent to the caller and the call will be disconnected.

1.15 Optional Device Features


Security Mode	Intercom Calls	Outside (CO) Line Calls
All Security		
Trunk Security	✓	
No Security	✓	✓

✓ Permitted

Outside-to-Outside (CO-to-CO) Line Calls through DISA

DISA callers can use DISA to make outside (CO) line calls when allowed by the DISA security mode. If a call between 2 outside parties is established via DISA, the length of the call can be limited to a preprogrammed duration (→ CO-to-CO Line Call Duration [205]). A timer will activate when the call is connected, and a warning tone will be heard 15 seconds before the timer expires. When the timer expires, the call is disconnected (→ 1.10.8 Outside (CO) Line Call Limitation). To detect the end of an outside-to-outside (CO-to-CO) line call, Calling Party Control (CPC) Signal Detection can be assigned through system programming (→ CPC Signal Detection—Incoming [420], CPC Signal Detection—Outgoing [421]).

[Flowchart]

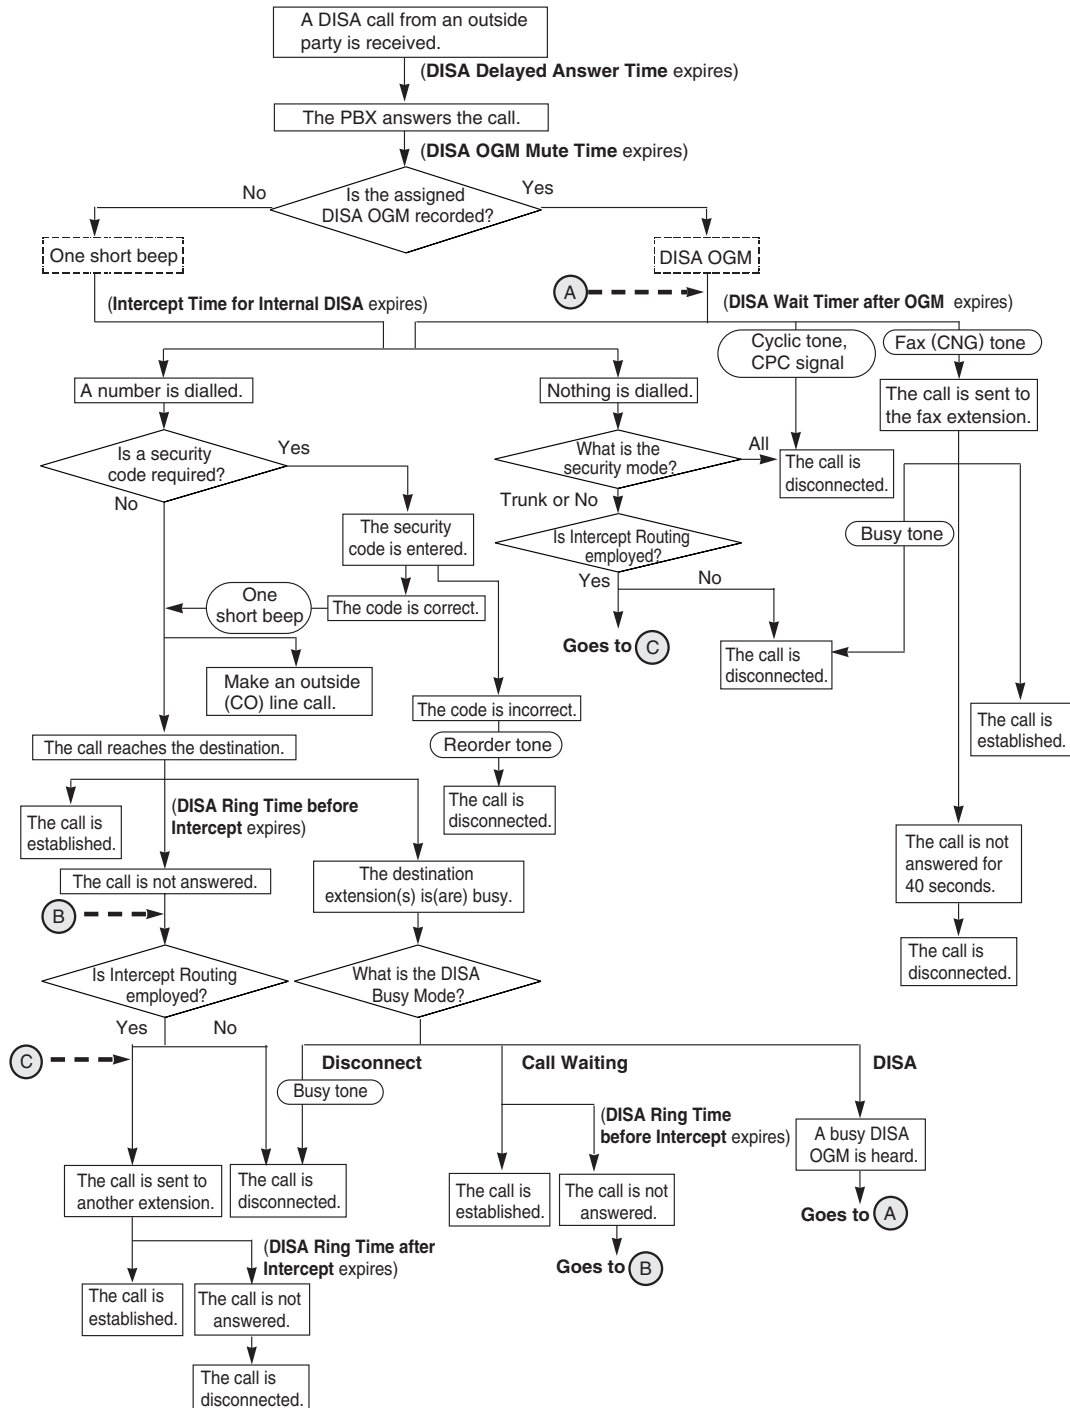

Conditions

WARNING

There is a risk that fraudulent telephone calls will be made using the Outside-to-Outside (CO-to-CO) Line Call feature of DISA.

The cost of such calls will be billed to the owner/renter of the PBX.

To protect the PBX from this kind of fraudulent use, we strongly recommend:

- a) **Enabling DISA security (Trunk Security or All Security).**
 - b) **Maintaining the secrecy of passwords.**
 - c) **Selecting passwords that are complex and random, so that they cannot be easily guessed.**
 - d) **Changing passwords regularly.**
- The maximum recording time of each message is 3 minutes.
 - The preinstalled DISA/UCD OGM card can play only one message at a time and the total recording time of the PBX for DISA/UCD OGMs is 3 minutes.
 - To use this feature, "DISA" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]).
 - **DISA Delayed Answer Time**
It is possible to set the DISA Delayed Answer time (→ DISA Delayed Answer Time [504]) so that the caller will hear a ringback tone for a preprogrammed length of time before hearing a DISA OGM or a short beep.
 - **Call Forwarding (FWD) to Outside (CO) Line**
When a DISA call is forwarded to an outside party, the caller is not required to enter a DISA security code regardless of the security mode.
 - **DISA OGM Mute Time**
Certain DTMF signals, such as Caller ID information, may be sent from the telephone company when a call is first connected. Because these signals may interfere with DISA, the PBX can be programmed to ignore DTMF signals for a specified amount of time (→ OGM Mute Time [519]) after a call is connected. After the DISA OGM Mute Time passes, DTMF signals are recognised by the PBX and the DISA OGM begins playing or a short beep is sent.
 - **SMDR**
The following are logged by SMDR for DISA calls (→ 1.20.1 Station Message Detail Recording (SMDR)):
 - The destination of the DISA call
 - DISA security code status
 - **Call Deny**
System programming determines which extensions can receive DISA calls (→ DISA Incoming Assignment [516]). If a DISA call is received at an extension that has Call Deny set, the caller will hear a reorder tone and the call will be disconnected automatically. If a DISA call is received by a DISA ring group, this programme does not function for extensions in that DISA ring group and these extensions will still ring.
 - **Cyclic Tone Detection**
It is possible to select the number of times a cyclic tone must be detected while the DISA OGM is sent (→ Cyclic Tone Detection [513]). Cyclic Tone Detection can be used to disconnect an outside-to-outside (CO-to-CO) line call via DISA.
 - **Fax Connection**
System programming determines the extensions that are able to receive fax data when the PBX receives a fax (CNG) tone via the DISA feature (→ FAX Connection [503]). The preprogrammed extension will automatically have the Data Line Security feature set.
 - **Fax Tone Detection**
It is possible to select the number of times the fax (CNG) tone must be detected while the DISA OGM

is sent before the PBX recognises the incoming signal as fax data (→ FAX Tone Detection [514]). If the DISA OGM is short (0–5 s), in some cases the fax (CNG) tone may not be detected. In this case, it is recommended to set the length of time the PBX continues to search for a fax (CNG) tone after completing a DISA OGM to "10 s" or "15 s" through system programming (→ DISA Wait Time after OGM [505]). If the assigned DISA OGM has not been recorded, it is recommended to set the length of time to "6 s" or "9 s" through system programming (→ Intercept Time for Internal DISA [515]).

- It is programmable whether a ringback tone (→ Ringback Tone Pattern [128]) or Music on Hold (→ Music on Hold [111]) is sent to the caller when a DISA call is received (→ DISA Ringback Tone [531]).

Feature Guide References

1.1.1.2 Intercept Routing

User Manual References

1.2.7 Accessing Another Party Directly from Outside (Direct Inward System Access [DISA])

3.3.1 Programming Information

1.16 Caller ID Features

1.16.1 Caller ID

Description

The PBX can receive Caller ID information (telephone numbers and callers' names) from calls received on outside (CO) lines. This information can be shown on the displays of proprietary telephones (PTs) as well as some single line telephones (SLTs) when receiving calls. Additionally, Caller ID information is logged in the Incoming Call Log of the extension that received the call, allowing the caller to view a record of incoming calls or make a call to a person in the call log later.

The PBX can be programmed to modify a caller's telephone number when it is received by, for example, adding an Outside (CO) Line Access number or adding/deleting certain digits of incoming telephone numbers automatically. This allows an extension user to make a call later to a telephone number logged in his or her call log without worrying about Outside (CO) Line Access numbers, area codes, etc.

Notes

- The term "Caller ID" used in this Feature Guide refers to features that can receive caller information sent from the telephone company and received on outside (CO) lines. Your network provider may use a different name for this type of service.
- To receive Caller ID information, you must subscribe to the telephone company's Caller ID service and enable Caller ID for the appropriate outside (CO) lines through system programming (→ Caller ID [900]).
- Caller ID signalling type, FSK (Bell 202 or V.23) or DTMF, can be selected to match the type used by your telephone company through system programming (→ Caller ID Type [910]).

Caller ID Display on SLT

This feature is available only for SLTs compatible with either FSK-type Caller ID or DTMF (Dual Tone Multi-Frequency)-type Caller ID.

Notes

- This feature complies with ETSI (European Telecommunications Standards Institute)-type FSK and Bellcore-type FSK.
- This feature does not comply with methods using DT-AS signal or line reversal signal.

1. Caller ID-Related Feature

Feature	Description	Details in
Incoming Call Log	Caller ID information is automatically recorded in the call log of the extension that received the call. This information can be used to view a record of incoming calls or make calls to any number in the call log.	• 1.16.2 Incoming Call Log

2. Caller ID Automatic 0 Addition

When a call containing Caller ID information is received, the PBX can add "0"¹ to the caller's telephone number as a leading number if it does not begin with "0", through system programming (→ Caller ID Automatic 0 Addition [905]).

¹ For New Zealand, "0" can be added to the received telephone number when the maximum length of a telephone number is 8 or 9 digits, and "00" can be added to the received telephone number when the maximum length is 10 digits or more.

3. Automatic Caller ID Number Modification

When Caller ID information is checked, the PBX can automatically modify the caller's telephone number according to a preprogrammed set of rules (Caller ID Modification Table). This modified number allows the extension user to make a call to this number later without worrying about Outside (CO) Line Access numbers, area codes, etc.

[Programming Example: Caller ID Modification Table]


Call Type	Code No.	Area Code* ¹	Removed No. of Digits	Added No.
Local Call* ²	1	212	3	Not Stored
	2	011	3	001
	:	:	:	:
	5			
Long-distance Call* ³	[Not programmable]		0	1

*¹ → Caller ID Area Code [901]

*² → Caller ID Modification for Local Calls [902]

*³ → Caller ID Modification for Long-distance Calls [903]

<Modification Flowchart>

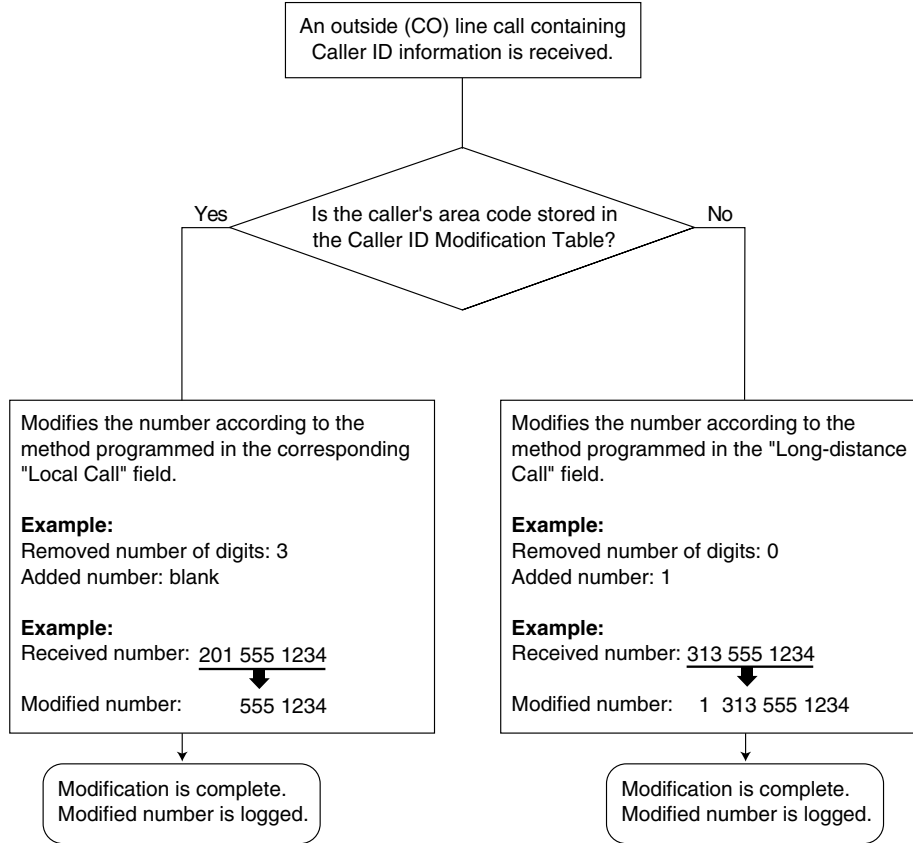

4. Displaying the Caller's Name

When a call containing Caller ID information is received, the PBX will search for the caller's name in the following order, then show that name on the display.

- 1) The System Speed Dialling Table
- 2) The Caller ID information received from the telephone company

If a caller's name is not stored in the PBX or sent from the telephone company, it will not be displayed.

Conditions

[General]

- **Hardware Requirement:** An optional Caller ID card.

[Caller ID Display on SLT]

- **Caller ID Display on SLT feature applies to:**
Intercom calls and outside (CO) line calls.
Intercom calls include forwarded calls, calls from Transfer Recall and Hold Recall.
Outside (CO) line calls include calls directed to Uniform Call Distribution (UCD) or Direct Inward System

Access (DISA) ring groups, forwarded calls, intercepted calls, or calls from extensions that placed outside (CO) line calls on consultation hold.

- SLT Caller ID signalling type can be selected through system programming (→ SLT Caller ID Signalling Type [150]).
- Each SLT (including an SLT connected in parallel with a PT) can be programmed to receive Caller ID information through system programming (→ SLT Caller ID [628]).
- When the caller's telephone number is sent to an SLT, an Outside (CO) Line Access number can be automatically added to the telephone number through system programming (→ SLT Caller ID Line Access Number [151]), to be used when calling the caller back.
- If a call is transferred, forwarded, or intercepted via Intercept Routing to an SLT, the original caller's information will be shown on the SLT.
- During a conversation, Caller ID information will not be shown on the SLT.
- When FSK-type Caller ID information is received, the caller's telephone number (max. 20 digits), name (max. 16 characters), date and time, or the reason for nondisplay of Caller ID information such as "Private", "Out of Area", or "Long Distance" will be shown on the SLT. If the caller's telephone number exceeds 20 digits, the SLT receives only the first 20 digits. If the caller's name exceeds 16 characters, the SLT receives only the first 16 characters.
- When DTMF-type Caller ID information is received, the caller's telephone number (max. 16 digits) or the reason for nondisplay of Caller ID information will be shown on the SLT. If the caller's telephone number exceeds 16 digits, the SLT receives only the first 16 digits. However, when a value less than "1500 ms" is set through system programming (→ SLT Ring Bell-on Time [143]), the SLT receives only the first 10 digits.
- Depending on the type of SLT being used, caller names and the dates and times that calls were received may not be able to be shown on the SLT.
- If an outside caller disconnects a call to an SLT on which the call's Caller ID information is displayed, and the SLT receives another outside (CO) line call directly after, the SLT will wait until a preprogrammed time has passed (→ SLT Ring Wait Time for New Call [627]) before it starts to ring, and the new caller's Caller ID information will be shown on the SLT. A certain amount of time may be required between calls for an SLT to receive Caller ID information correctly.
- To enable the Caller ID feature, it may be necessary to set the same ring tone pattern (→ SLT Fixed Bell Pattern [629]) as used by the telephone company.
- When an SLT is programmed to receive Caller ID information, the ringing of calls with Caller ID on that SLT is delayed for a few seconds. Therefore, the length of time before calls are forwarded or intercepted, and the length of time that intercepted calls ring at the destination SLT, may be slightly shorter than the duration specified through system programming.

Installation Manual References

2.3.2 3-Port Caller ID Card (KX-TE82493)

Feature Guide References

1.6.1.5 Speed Dialling—Personal/System

1.20.1 Station Message Detail Recording (SMDR)

4.2.1 Tones/Ring Tones

1.16.2 Incoming Call Log

Description

When a call containing Caller ID information is received by an extension, the information is shown on the telephone display, notifying the extension user of the caller's identity.

This information is also automatically logged in the Incoming Call Log of the extension, and can be viewed later or used to call that caller back.


There are 2 types of call log areas available in the PBX. One is the personal area, which stores logs of calls received by each extension when a call arrives at a certain proprietary telephone (PT).

The other is the common area, which stores a log of calls arriving at multiple PTs or via the Direct Inward System Access (DISA) Intercept Routing feature. Caller ID information can be logged by the following methods:

- Logged automatically when no one answers calls.
- Logged automatically if an extension user presets logging of the caller's information when answering calls.
- Logged manually by pressing the Caller ID Indication button during a conversation.

[Example]

If the information is stored in record "002",

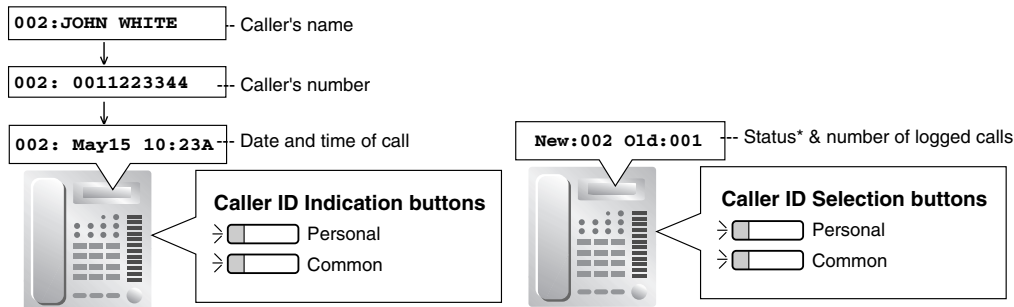

* "New" is displayed for call records that have not previously been viewed;
 "Old" is displayed for call records that have previously been viewed.
 Both new and old call records are stored in each personal and common area.

Conditions

• Caller ID Indication—Personal/Common Button

A flexible CO button can be customised as a Caller ID Indication—Personal/Common button, and will indicate the status of the Incoming Call Log for the extension, as shown below.

Light pattern	Status of the corresponding call log
Red on	There are new call records since the last time the call log was viewed.
Off	There are no new call records in the call log, or the call log has been already viewed.

The Caller ID Indication—Personal/Common button will alert an extension user to any missed (unanswered) calls.

The Caller ID Indication—Personal/Common button is also used to store the information of an incoming call during a conversation, and to view caller information while on-hook and then call back a caller.

If a Caller ID Indication—Common button is not assigned to any PT, the calls will be logged in the personal area of the PT that is connected to the lowest-numbered jack, and its Caller ID Indication—Personal button light will turn red.

- **Caller ID Selection—Personal/Common Button**

A flexible CO button can be customised as a Caller ID Selection—Personal/Common button. The Caller ID Selection—Personal/Common button is used to display the number of logged calls while on-hook, to display and cycle through the information of an incoming call during a conversation, while receiving a call, or while viewing caller information, and to inform an extension user that the personal or common area call log is full. The user may also change the displayed information by pressing the "#" key instead of the Caller ID Selection—Personal/Common button while receiving a call, or while viewing caller information.

- It is programmable whether the user can view call logs stored in the common area or not (→ Common Area Call Log Check [909]). If this programme is enabled, the Caller ID Indication—Common button and Caller ID Selection—Common button can be assigned.

- **Incoming Call Log Memory**

The total number of incoming calls that can be logged by the PBX is limited (→ 4.1.1 Capacity of System Resources). When a call log is full (personal area: 20 calls, common area: 300 calls), the Caller ID Selection—Personal/Common button light will turn red.

It is possible for an extension user (or the operator/manager) to select whether the oldest call in the personal area (or common area) will be replaced each time a call is received, or whether the new call information will be discarded, by entering the 21st Incoming Call Logged in the Personal Area (or 301st Incoming Call Logged in the Common Area) feature number.

Caller records for all call logs of an extension are numbered sequentially as they are received, regardless of which call log the information is stored in. For example, information on the first call received will be stored as record "001" (e.g., 001, logged in the personal area) and information on the second call received will be stored as record "002" (e.g., 002, logged in the common area), whether it is logged in the personal area or common area.

If the call log in the personal area becomes full when the 21st call (e.g., 110, logged in the personal area) has been set to overwrite the oldest call (001, logged in the personal area),

- The oldest call will be deleted and subsequent records will be moved one number down, if the 21st call is unanswered or if it is answered but has different information from the 20th call.
- The 21st call will be discarded and the previous call information will stay as it is, if the 21st call is answered and has the same information as the 20th call.

Common area call logs function in the same way.

- If a transferred call (unscreened) is not answered, the information is logged in the personal area of the final destination.

- **Incoming Call Log Display Lock**

An extension user can lock the Incoming Call Log stored in his or her personal area, preventing other users from viewing its contents (→ 1.8.3 Extension Lock). The operator or manager can cancel the lock in the case that the extension user forgets the lock code (Extension Lock—CANCEL ALL).

The Incoming Call Log for the common area can only be locked or unlocked by the operator or manager.

- **Automatic Caller ID Number Modification**

If the PBX is programmed to automatically modify incoming telephone numbers, the modified numbers will be displayed when Caller ID information is checked. Extension users can also modify the incoming telephone numbers manually.

- **Initial Display Selection**

If the Caller ID service provides both the number and name, the user can select which is shown first on the display of the PT through system programming (→ Caller ID Log Priority [904]).

Feature Guide References

1.16.1 Caller ID

1.16 Caller ID Features

1.18.2 Flexible Buttons

User Manual References

1.9.1 Calling with the Incoming Call Log

2.1.4 Erasing All Caller Information in the Common Area (Incoming Call Log in the Common Area—CLEAR ALL)

2.1.5 Disregarding the Newest Call or Overwriting the Oldest Call in the Common Area Call Log (301st Incoming Call Logged in the Common Area)


1.17 Message Features

1.17.1 Message Waiting

Description

When an extension user calls another extension user who does not answer the call, he or she can leave a message waiting indication. The appropriate button or lamp on the called extension user's telephone will light, indicating that a call was missed, or a message recorded by the Voice Processing System (VPS) feature is waiting. A MESSAGE button can be used to call the caller back or listen to the message. When a message is left for a proprietary telephone (PT), the MESSAGE button on it lights, or the Message/Ringer Lamp turns red. Pressing the lit MESSAGE button while on-hook shows the caller's information as shown below:

[Example]

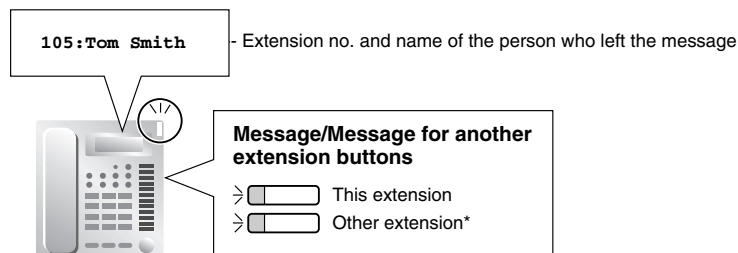

* This button is useful when, for example, the manager checks messages left for another extension.

Conditions

- System programming determines the single line telephones (SLTs) that can receive the message waiting notifications left by another extension (→ SLT Message Waiting [619]).
- If a user goes off-hook with an SLT that has messages waiting, a special dial tone (dial tone 3) will be heard. The user can call a caller back or listen to the message by entering the Message Waiting Answer feature number.
- Message for another extension Button**
A flexible CO/Direct Station Selection (DSS) button can be customised as a Message for another extension button. This button can be used on a PT that is allowed through system programming (→ Message Waiting for Another Extension [618]) to access messages left for another extension or voice messages stored in another extension's VPS mailbox.
- Message Waiting for Another Extension Lock**
An extension user can lock or unlock message waiting indications to prevent others from viewing, calling back or clearing message waiting indications left at his or her extension. The operator and manager can override this lock to unlock it (Extension Lock—CANCEL ALL).
Even while this lock is on, the user can view, call back, or clear message waiting indications left at his or her own extension.
- Both the calling extension and the called extension can cancel a notification after it has been left.
- Message waiting indications are always left on the originally called extension. Message waiting indications cannot be sent to an FWD destination (→ 1.3.1.2 Call Forwarding (FWD)) or an idle extension hunting destination (→ 1.2.1 Idle Extension Hunting).

1.17 Message Features

- A message waiting indication is automatically cleared when the called extension calls the caller back and the call is answered.
- **Message Waiting Indication via Voice Mail APT Integration**
If a voice message is left for the called extension, it can be heard by following the Voice Mail prompts after pressing the lit MESSAGE button (→ 1.19.1 Voice Mail APT Integration).
- It is possible to activate the Message/Ringer Lamp (→ KX-T7700 Series Incoming Lamp Control [968]) on the KX-T7700 series telephones for the following incoming calls:
 - Incoming call from another extension to a busy extension when the called extension has set Call Waiting (Call Waiting Tone 1)
 - Incoming doorphone call whose ring tone pattern is set to "S-Double" (→ Doorphone Ring Tone Pattern [706]) (except when using the Paralleled Telephone feature) when an optional doorphone or doorbell/door chime is connected to the PBX

Feature Guide References

- 1.18.1 Fixed Buttons
- 1.18.2 Flexible Buttons

User Manual References

- 1.2.4 When the Dialed Party is Busy or There is No Answer
- 1.8.3 If a Voice Processing System is Connected

1.17.2 Absent Message

Description

Extension users can prepare a brief text message (Absent Message) that will be displayed to other extension users when they are called. This message can explain the reason for their absence, and can be used by any extension user.

The following Absent Messages may be programmed:

Message No.	Message
1	Will Return Soon
2	Gone Home
3	At Ext %% (Extension Number)
4	Back at %:% (Hour:Minute) AM (or PM)
5	Out Until %/% (Month/Day)*
6	In a Meeting

Notes

- * The date order varies depending on the user's country/area.
- The "%" shown above indicates a parameter to be entered when assigning a message at an individual extension.

Conditions

- An extension user can select only one Absent Message at a time. The selected message is displayed at the extension every time the user goes off-hook.
- The caller must be using a display proprietary telephone (PT) to see the Absent Message.

User Manual References

1.5.2 Showing a Message on the Caller's Telephone Display (Absent Message)

1.17.3 Fixed Line SMS Terminal Support

Description

When outside (CO) line calls are received from a Short Message Service (SMS) centre, the PBX can route incoming calls to specific single line telephones (SLTs) that support SMS according to a preprogrammed set of rules (SMS Routing Table). Fixed Line SMS is a service that allows text messages to be sent and received via Public Switched Telephone Network (PSTN) access.

If a user subscribes to his or her telephone company's Caller ID service and the PBX receives an SMS centre call from the registered SMS centre number, the PBX will relay the text message to the SLT. In all other cases, incoming outside (CO) line calls will be directed according to system programming (→ CO Line Mode—Day/Night/Lunch [414-416]).

To make or receive SMS centre calls using fixed lines, the PBX and specific SLTs must be programmed so they will know how to handle those calls. To programme SLTs, refer to the Operating Instructions supplied with the SLTs.

Notes

- This feature complies with the following ETSI (European Telecommunications Standards Institute) specifications:
ETSI ES 201 912
- This feature is available only for SLTs that support SMS. SMS service depends on the contract with your telephone company.

[Programming Example: SMS Routing Table with Sub-address Numbers]

When the SMS centre number used to receive SMS centre calls is "1112224444" and the telephone numbers of each outside (CO) line are "3847001" for CO 1/2 and "3847002" for CO 3, programme as follows:

1) PBX setting

SMS Centre Number for Receiving*1: 1112224444

Location No.	Outside (CO) Line No.*2	Extension Jack No.*3
1	CO 1, CO 2	Jack 01, Jack 02, Jack 03
2	CO 3	Jack 07, Jack 08
3	Not Stored	Not Stored

*1 → SMS Centre Number for Receiving [145]

*2 → SMS Routing Table—CO [146]

*3 → SMS Routing Table—Extension [147]

If the SMS centre supports sub-address numbers, up to 4 SLTs can be assigned as the SMS destinations for a single location. One location can be used for each outside (CO) line telephone number.

2) SLT setting

Extension Jack No.	SMS Centre Number for Sending	SMS Centre Number for Receiving	SMS Sub-address
Jack 01	89* ¹ P* ² 1112223333	1112224444	1
Jack 02	89* ¹ P* ² 1112223333	1112224444	2
Jack 07	89* ¹ P* ² 1112223333	1112224444	1
(Cont.) :	:	:	:
:	:	:	:

*¹ 89: Outside (CO) Line Access number used to make SMS centre calls using the fixed outside (CO) lines.

When the SMS centre can receive an SMS message from any telephone number, the Automatic Line Access number or Outside (CO) Line Access number can also be used respectively.

*² P: Pause

In this example:

- a) To send an SMS message to the SLT connected to extension jack 01, enter "38470011" as the destination.
- b) To send an SMS message to the SLT connected to extension jack 02, enter "38470012" as the destination.
- c) To send an SMS message to the SLT connected to extension jack 07, enter "38470021" as the destination.

[Programming Example: SMS Routing Table without Sub-address Numbers]

When the SMS centre number used to receive SMS centre calls is "1112224444" and the telephone numbers of each outside (CO) line are "3847001" for CO 1, "3847002" for CO 2, and "3847003" for CO 3, programme as follows:

1) PBX setting

SMS Centre Number for Receiving: 1112224444

Location No.	Outside (CO) Line No.	Extension Jack No.
1	CO 1	Jack 01
2	CO 2	Jack 02
3	CO 3	Jack 03

If the SMS centre does not support sub-address numbers, only one SLT can be assigned for each location.

One location can be used for each outside (CO) line telephone number.

2) SLT setting

Extension Jack No.	SMS Centre Number for Sending	SMS Centre Number for Receiving	SMS Sub-address
Jack 01	89 P1112223333	1112224444	—
Jack 02	89 P1112223333	1112224444	—
Jack 03	89 P1112223333	1112224444	—
(Cont.) :	:	:	:
:	:	:	:

In this example:

- To send an SMS message to the SLT connected to extension jack 01, enter "3847001" as the destination.
- To send an SMS message to the SLT connected to extension jack 02, enter "3847002" as the destination.
- To send an SMS message to the SLT connected to extension jack 03, enter "3847003" as the destination.

Conditions

- **Hardware Requirement:** An optional Caller ID card.
- The PBX relays text messages from the SMS centre to SMS-enabled SLTs, and vice versa.
- To receive SMS information, you must subscribe to the telephone company's Caller ID service and enable Caller ID for the appropriate outside (CO) lines through system programming (→ Caller ID [900]).
- Each SMS-enabled SLT must be programmed to receive Caller ID information through system programming (→ SLT Caller ID [628]).
- If an SLT user sets the Automatic Callback Busy feature by dialling "6" because the selected line is busy when he or she tries to send a text message, the SLT will ring when the line becomes idle. To send the text message, the user must answer the callback ring, go on-hook, and then make an SMS centre call again.
- When a call is received on one of the outside (CO) lines preprogrammed in an SMS Routing Table, the destination SLT may ring one time.
- If a user wants to receive SMS messages on an SLT, it is recommended to not connect a proprietary telephone (PT) in parallel. If the PT user answers the call, the SMS message will not be received.
- When an SMS centre call is received at an SLT that has set the Call Forwarding (FWD) feature, the FWD feature will not function and the SMS message is received by that SLT.
- When an SLT user makes an SMS centre call, in some cases the duration of the call may not be verified with SMDR (→ 1.20.1 Station Message Detail Recording (SMDR)), because it takes very little time to send SMS messages. To verify the duration of these calls, it is recommended to set the start timer of call duration to "5 s" or "Instantly" through system programming (→ Call Duration Counter Start [204]).
- When a user on an SLT that is in "TONE (DTMF)" mode makes an SMS call using outside (CO) lines set to "Pulse" or "Call Block" mode through system programming (→ Dial Mode [401]), if the SMS centre number is longer than supported, for example 16 digits, the SMS call may not be completed. In this case, set the dialling mode of the SLT to "PULSE" mode using the switch.

Installation Manual References

2.3.2 3-Port Caller ID Card (KX-TE82493)

1.18 Proprietary Telephone (PT) Features

1.18.1 Fixed Buttons

Description

Proprietary telephones (PTs) and Direct Station Selection (DSS) Consoles feature a wide variety of feature buttons and Line Access buttons, explained below.

Note that certain models do not have certain buttons.

For a description of the buttons found on each PT or DSS Console, please refer to the Operating Instructions for each PT or DSS Console.

[PT]

Button	Function
Navigator Key	Used to adjust the volume of the speaker, handset and headset, and the display contrast, or to select desired items.
Volume Key	Used to adjust the volume of the speaker, handset and headset.
PROGRAM	Used to enter and exit programming mode.
FLASH/RECALL	Used to disconnect the current call and make another call without hanging up (Flash/Recall mode), or to send an EFA (External Feature Access) signal to the telephone company or host PBX to access external features (EFA mode).
HOLD	Used to place a call on hold.
SP-PHONE (Speakerphone)	Used to select handset or hands-free operation.
MONITOR	Used to select hands-free dialling and monitor operation.
MESSAGE	Used to leave a message waiting indication, call back the party who left a message waiting indication, or play back voice messages. This button is provided with an LED (Light Emitting Diode), except for on KX-T7700 series telephones. With KX-T7700 series telephones, the Message/Ringer Lamp is lit when a message waiting indication is left at an extension.
REDIAL	Used to redial the last number dialed.
TRANSFER	Used to transfer a call to another party.
Flexible CO	Used to access an outside (CO) line (or outside (CO) line group) when making or receiving a call. The button's preprogrammed Outside (CO) Line Access method determines which line is selected (Default: Single-CO [S-CO]). Can also be customised as a feature button.
INTERCOM	Used to make or receive intercom calls.
AUTO ANS (Auto Answer)/MUTE	Used to answer an intercom call automatically in hands-free mode, or to mute the built-in microphone during a conversation.
VOICE CALL	Used to answer an intercom call automatically.
AUTO DIAL/STORE	Used for System Speed Dialling/Saved Number Redial, and storing programme changes.

Button	Function
CONF (Conference)	Used to establish a 3-party or 5-party conference call.
FWD/DND (Call Forwarding/Do Not Disturb)	Used to set the FWD or DND feature for the extension.
PAUSE	Used to insert a dialling pause in a stored number.
PF (Programmable Feature)	Used to access a preprogrammed feature (no default). Mostly used as a One-touch Dialling button.

[DSS Console]

Button	Usage
Flexible DSS	Used to call an extension with a one-touch operation. Each button is programmed to correspond to an extension. DSS buttons can also be customised as different feature buttons.
PF	Used to access a preprogrammed feature (no default). Mostly used as a One-touch Dialling button.

Conditions

- Certain buttons are equipped with a light to indicate the status of the corresponding line or feature.

User Manual References

1.1.1 Before Operating a Telephone

1.18.2 Flexible Buttons

Description

Flexible buttons are buttons whose functions can be customised through either system or personal programming. The following types of flexible buttons are found on proprietary telephones (PTs) and/or Direct Station Selection (DSS) Consoles:

- a) Flexible CO buttons
- b) Flexible DSS buttons
- c) Programmable Feature (PF) buttons
- d) Flexible MESSAGE button

[Button Usage]

Button	Function
Single-CO (S-CO)	Used to access a specified outside (CO) line for making or receiving calls (→ 1.5.3.3 Outside (CO) Line Access).
Group-CO (G-CO)	Used to access an idle outside (CO) line in a specified outside (CO) line group for making calls. Incoming calls from outside (CO) lines in the assigned outside (CO) line group arrive at this button (→ 1.5.3.3 Outside (CO) Line Access).
Other-CO (O-CO)	Used to access an idle outside (CO) line for making calls. Incoming calls from the assigned outside (CO) lines, which are not assigned to S-CO or G-CO buttons, arrive at this button (→ 1.5.3.3 Outside (CO) Line Access).
Direct Station Selection (DSS)	Used to call an extension with a one-touch operation (→ 1.5.1.1 Intercom Call).
One-touch Dialling	Used to call a preprogrammed party or access a feature with a one-touch operation (→ 1.6.1.2 One-touch Dialling).
Message	Used to leave a message waiting indication, call back the party who left the message waiting indication, or play back voice messages (→ 1.17.1 Message Waiting).
Message for another extension	Used to access messages stored for another extension (→ 1.17.1 Message Waiting).
FWD/DND (Call Forwarding/Do Not Disturb)	Used to set the FWD or DND feature for the extension (→ 1.3.1.1 Call Forwarding (FWD)/Do Not Disturb (DND)—OVERVIEW).
Save	Used to store a telephone number while in a conversation with an outside party or while hearing a busy tone, and then easily redial the number later (→ 1.6.1.4 Redial).
Conference	Used to establish a 3-party or 5-party conference call (→ 1.13.1.2 Conference).
Caller ID Indication—Personal	Used to inform an extension user of calls logged in his or her personal area, store the information of an incoming call during a conversation, and view caller information while on-hook and then call back a caller (→ 1.16.2 Incoming Call Log).

Button	Function
Caller ID Selection—Personal	Used to display and cycle through the information of an incoming call during a conversation, while receiving a call, or while viewing caller information, display the number of logged calls while on-hook, and inform an extension user that the personal area call log is full (→ 1.16.2 Incoming Call Log).
Caller ID Indication—Common	Used to inform an extension user of calls logged in the common area, store the information of an incoming call during a conversation, and view caller information while on-hook and then call back a caller (→ 1.16.2 Incoming Call Log).
Caller ID Selection—Common	Used to display and cycle through the information of an incoming call during a conversation, while receiving a call, or while viewing caller information, display the number of logged calls while on-hook, and inform an extension user that the common area call log is full (→ 1.16.2 Incoming Call Log).
Log-in/Log-out	Used to switch between Log-in and Log-out status (→ 1.2.4 Log-in/Log-out).
Day	Used to change the time service mode to day mode (→ 2.2.3 Time Service).
Night	Used to change the time service mode to night mode (→ 2.2.3 Time Service).
Lunch	Used to change the time service mode to lunch mode (→ 2.2.3 Time Service).
Extension Lock	Used to remotely lock or unlock another extension (→ 2.2.4 Operator/Manager Features).
2-way Record	Used to record a conversation into the user's own mailbox (→ 1.19.1 Voice Mail APT Integration).
2-way Transfer	Used to record a conversation into the mailbox of a specified extension (→ 1.19.1 Voice Mail APT Integration).
Live Call Screening (LCS)	Used to listen while a caller is leaving a message in the user's voice mailbox and, if desired, intercept the call (→ 1.19.1 Voice Mail APT Integration).
LCS Cancel	Used to stop monitoring the user's own voice mailbox while a caller is leaving a message, or stop the alert tone heard in private mode while a caller is leaving a message (→ 1.19.1 Voice Mail APT Integration).
Voice Mail (VM) Transfer	Used to transfer a call to the mailbox of a specified extension (→ 1.19.1 Voice Mail APT Integration).

Conditions

- **Extension button confirmation**
A display PT user can confirm the button settings, such as the flexible CO button, by pressing the corresponding button while on-hook.
- The Day, Night, Lunch, and Extension Lock buttons can only be assigned to flexible DSS buttons at an extension assigned as the operator or manager.

User Manual References

3.1.3 Customising the Buttons

1.18.3 LED Indication

Description

The LED (Light Emitting Diode) of the Message/Ringer Lamp and the following buttons (Line Status Buttons and Corresponding Extension Status Button) can indicate line status with a variety of light patterns.

Line Status Buttons: Single-CO (S-CO), Group-CO (G-CO), Other-CO (O-CO), INTERCOM

Corresponding Extension Status Button: Direct Station Selection (DSS)

1. Light Pattern of the Message/Ringer Lamp

- Incoming call from an outside (CO) line/another extension: Red flashing
- Message(s) present (no incoming call): Red on
- No messages present and no incoming call: Off

2. Light Pattern of the Line Status Buttons


Line Status Button Light Pattern	Outside (CO) Line Status			Intercom Line Status
	S-CO	G-CO	O-CO	INTERCOM
Off	Idle			
Green on	This extension is using the line.			
Slow green flashing	This extension is holding the line.			
Moderate-speed green flashing	This extension is holding the line using Exclusive Call Hold or using the line for an unattended conference.			
Rapid green flashing	—	—	—	Incoming call
Red on	Line(s) in use			—
Slow red flashing	Another extension is holding the line.	—	—	—
Rapid red flashing	Incoming call			—

3. Light Pattern of the Corresponding Extension Status Button

Corresponding Extension Status Button Light Pattern	DSS
Off	Idle
Slow red flashing	Call Forwarding (FWD)*
Moderate-speed red flashing	Do Not Disturb (DND)*
Red on	Busy

* This setting can be changed through system programming (→ DSS Lamp Mode [112]).

4. Flashing Light Patterns

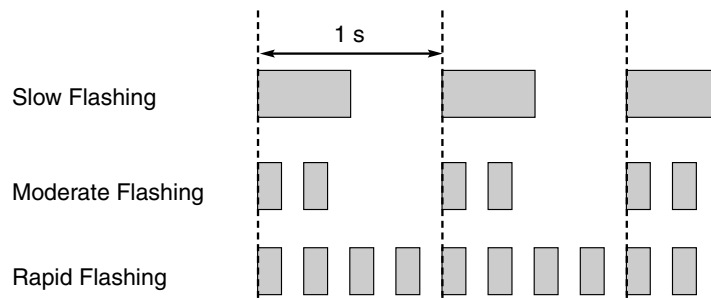

Conditions

- Incoming outside (CO) line calls arrive on available buttons in the following priority:
S-CO → G-CO → O-CO

Feature Guide References

- 1.2.3 Direct Inward System Access (DISA) Ring
- 1.3.1 Call Forwarding (FWD)/Do Not Disturb (DND)
- 1.12.1 Call Hold
- 1.13.1.2 Conference

1.18.4 Display Information

Description

A display proprietary telephone (PT) can relay the following information to the user while making or receiving calls:

Display Item	Display Example	Condition
The extension number and name of the calling or called extension	101: Tom Smith	Extension numbers and names are programmable (→ Extension Number [009], Extension Name [604]). If an extension name is not stored, only the extension number will be displayed.
The status of the called extension	101: Busy	—
The name and number of the doorphone	DoorPhone 1	—
The telephone number dialed	1234567890	—
The extension number and name of the calling extension after the call is forwarded	→ 102:Mike	—
The received call information a) Caller's name b) Caller's number c) Outside (CO) line number	ABC Company 12345678 Call on CO 1	The first line message can be either (a) or (b) at each extension through system programming (→ Caller ID Log Priority [904]).
Duration of the current outside (CO) line call	CO 1 0:01'15	The display remains for 5 seconds after the call is finished. The outgoing outside (CO) line call duration starts when the specified time expires (→ Call Duration Counter Start [204]). The display does not show the duration of intercom calls.

Conditions

- Display Contrast**
 The display contrast can be adjusted with the Navigator key or the CONTRAST selector. This is available only for PTs.
- Ringer Volume**
 The volume of the ringer can be adjusted with the RINGER Volume selector.
- Self-extension Number**
 A display PT user can confirm his or her own jack number and extension number on the display. Every time the "✳" key is pressed, the display switches between "date (month [day], day [month]) and time", "date (month [day], day [month], year, day of the week)", and "extension number (and extension name if stored)".
- Date and Time Set**
 The current date and time are set through system programming (→ Date & Time [000]) or the operator/

manager service features. The time format shown on the display PTs while on-hook, "12 h" or "24 h", can also be selected through system programming (→ LCD Time Display [010]).

- Characters (name) or digits (number) exceeding the maximum length of the display are not displayed. Although in this case information may not be displayed properly, the received information is not altered. When the information displayed by pressing specific buttons (One-touch Dialling, REDIAL, Save) while on-hook exceeds 17 characters, the "&" mark will be shown on the right side of the display.

User Manual References

- 2.1.6 Changing System Settings Using Programming Mode
- 3.1.2 Changing Personal Settings Using Programming Mode


1.19 Voice Mail Features

1.19.1 Voice Mail APT Integration

Description

A Panasonic Voice Processing System (VPS) that supports APT Integration can provide many features and conveniences that are unachievable using traditional voice mail systems that rely on Inband (DTMF) Integration.
Many of these features are explained below. For more information, refer to the Installation Manual supplied with the Panasonic VPS.

1. **Automatic Configuration—Quick Setup** (or DIP switch initialisation without a PC)
The PBX shares information with the VPS during setup that allows the VPS to automatically create the appropriate mailboxes for all extension numbers.
The following settings to enable APT Integration must be programmed through system programming to match the settings of the VPS.

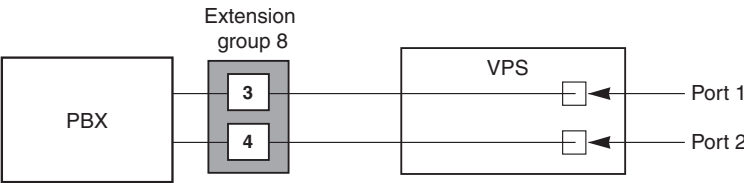

This example uses a Panasonic KX-TVP50 series VPS, which can be connected with 2-conductor wire to 2 extension jacks of the PBX.

[Programming Example: Voice Mail Table]

APT Integration	VM 1 APT Port*
Enable	Port 03 & 04

* → VM 1 APT Port [130]

In this example:
When "Port 03 & 04" is selected for VPS, extension jacks 03 and 04 are placed in extension group 8 automatically (→ Extension Group [600]). Also the idle extension hunting type is set as "Circular Hunting" (→ Hunting Type [101]), and the Voice Mail (VM) Hunting Chain and Automated Attendant (AA) Hunting Chain are automatically enabled in the extension group (→ Hunting Group Set [100]).

Note

When "Disable" is selected, the other settings above are reset to their default values.

2. **AA Service**
Allows the VPS to answer calls and direct callers to dial a number in order to connect themselves to the desired party (e.g., "Enter the extension number of the desired party.").
It is possible to access VM service from AA service to, for example, record messages.

3. VM Service


Allows callers to leave voice messages for specific parties, such as an extension user. Extension users can then listen to the messages left in their mailboxes at their convenience.

AA Service

A VPS can be used for the AA service as well as the VM service. When a call is directed to a port of the VPS that is in AA service mode, the caller will hear an outgoing message (OGM). After or while listening to the OGM, the caller may dial an extension number as directed (e.g., "Enter the extension number of the desired party.").

1. AA to Extension


AA receives and answers outside (CO) line calls and offers services such as transferring to an extension or mailbox using DTMF signalling from the calling party.

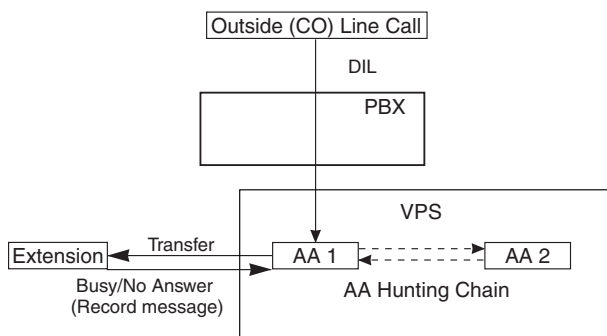

2. Extension Backup

If the VPS is assigned to ring with other extensions, for example the operator, for the same outside (CO) line, the VPS can be used as a backup for the operator when the operator cannot answer an incoming outside (CO) line call.

In order to use this feature, Delayed Ringing must be set for the VPS (→ Delayed Ringing—Day/Night/Lunch [411-413]).

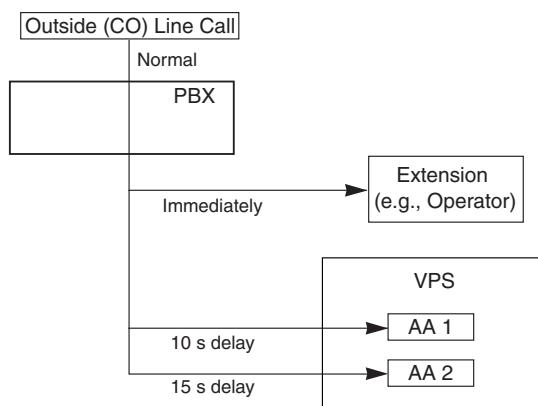

3. Status Notification to the VPS

When a call is redirected to the VPS, the PBX sends the status of the called extension to the VPS. This allows the VPS to appropriately handle the call, playing the appropriate OGM for the caller. For example, if the called extension is in Do Not Disturb (DND) mode, the OGM (e.g., "I am unable to answer your call right now, but I will get back to you shortly.") can be played.


VM Service

1. Accessing a Mailbox

The PBX sends special messages to the VPS to indicate which mailbox should be accessed (**Follow-on ID**).


2. FWD to a Mailbox of the VPS

An extension user can set his or her calls to be forwarded to the VPS (→ 1.3.1.2 Call Forwarding (FWD)). When a call is received at the extension, the PBX sends the extension's mailbox number to the VPS, and the VPS answers the call with the appropriate OGM (e.g., "Hi, I'm out of the office today...").

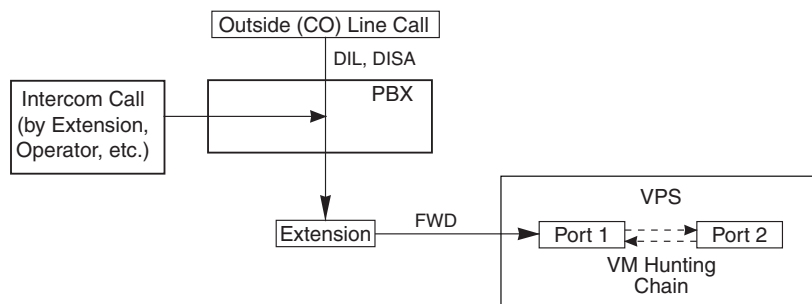

3. Intercept Routing to a Mailbox of the VPS

Outside (CO) line calls via DISA (→ 1.15.6 Direct Inward System Access (DISA)) can be programmed to be automatically redirected to an extension user's mailbox when the extension user does not or cannot answer them (→ 1.1.1.2 Intercept Routing). The VPS can answer the call with an OGM (e.g., "I can't take your call now...") and callers can leave messages in the mailbox. In order to use this feature, a voice mail extension number must be assigned as the intercept destination for the original destination extension that received the call (→ CO Line Mode—Day/Night/Lunch [414-416], Flexible Ringing—Day/Night/Lunch [408-410], Delayed Ringing—Day/Night/Lunch [411-413]), and "Intercept" must be selected through system programming (→ DISA Intercept Mode [507]).

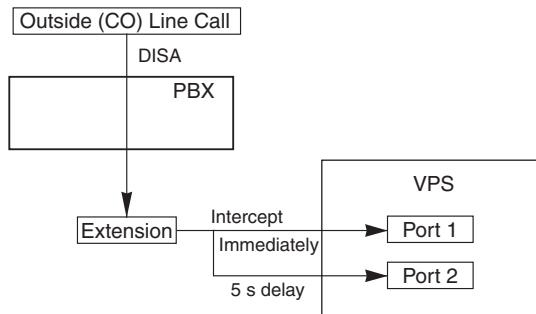

4. Transferring to a Mailbox of the VPS

Extension users can transfer calls to a mailbox, after which callers can leave a message for the desired party. While answering a call, the extension user simply presses the VM Transfer button and enters the extension number of the party the caller wishes to leave a message for. The VPS will answer the transferred call and record a message into the appropriate mailbox.

VM Transfer Button

In order to use this feature, the extension user must use a flexible CO/Direct Station Selection (DSS) button customised as a VM Transfer button. A voice mail extension number must be assigned to the

button when creating it.

5. Listening to Recorded Messages

After the VPS records a message, it will light the appropriate lamp or button on the extension for which the message was intended, to indicate that there is a new message (→ 1.17.1 Message Waiting). The proprietary telephone (PT) user can play the message back simply by pressing the MESSAGE button used for mailbox access; he or she does not need to enter a mailbox number. A single line telephone (SLT) user hears a special dial tone (dial tone 3) when going off-hook if there are any messages in his or her mailbox, and can play the message back by entering the Message Waiting Answer feature number.

6. Live Call Screening (LCS)

Similar to a conventional home answering machine, LCS allows a PT user to monitor his or her own mailbox as a caller is leaving a message and, if desired, answer the call simply by pressing the LCS button.

PT users can choose one of 2 ways to perform LCS, through personal programming (Live Call Screening [LCS] Mode Set):

Hands-free mode: The user can screen calls automatically through the built-in speaker.

Private mode: The user will hear an alert tone when a message is being recorded in his or her mailbox. To screen calls, the user must press the MONITOR, SP-PHONE, or LCS button.

LCS/LCS Cancel Button

A flexible CO/DSS button can be customised as an LCS or LCS Cancel button.

7. 2-way Recording into the VPS

PT users can record their own telephone conversations. These recordings can be stored in the PT user's own mailbox (**2-way Record**) or in another user's mailbox (**2-way Transfer**), depending on which button the user presses to begin recording.

2-way Record/2-way Transfer Button

A flexible CO/DSS button can be customised as a 2-way Record or 2-way Transfer button.

Note

You should inform the other party that the conversation will be recorded before beginning to record any telephone conversation.

Conditions

[General]

- A VPS can be assigned as the destination for the following features:
 - FWD—All Calls
 - FWD—Busy/No Answer
 - DISA Intercept Routing—No Answer (IRNA)

For these features, the caller does not need to know the mailbox number of the called extension because the code is automatically transmitted to the VPS. If a DISA call is forwarded to the VPS by the IRNA feature from a DISA ring group, the PBX will send the VPS the mailbox number of the extension within the DISA ring group that is connected to the lowest-numbered jack.

[Live Call Screening (LCS)]

- To prevent the unauthorised screening of calls, a 3-digit password must be entered when activating LCS for an extension. If the user forgets his or her password, it can be cleared by the operator or manager (LCS Password Control).

1.19 Voice Mail Features

- If an extension user is screening a call and then goes off-hook to answer it, the VPS will either stop or continue recording the message, according to system programming (→ LCS Recording Mode Set [620]).
- If a call arrives while an extension user is having a conversation with another party and the extension has Call Waiting activated, the user will hear a call waiting tone. The user can put the existing call on hold before accessing LCS.

[2-way Recording into the VPS]

- If all ports of the VPS are busy when a user tries to record a conversation:
 - The user hears an alarm tone when pressing the 2-way Record button.
 - The user hears an alarm tone after pressing the 2-way Transfer button followed by an extension number.

Feature Guide References

1.18.2 Flexible Buttons

User Manual References

1.8.3 If a Voice Processing System is Connected

3.1.2 Changing Personal Settings Using Programming Mode

1.19.2 Voice Mail Inband (DTMF) Integration

Description

A Panasonic Voice Processing System (VPS) or similar product from another manufacturer can provide Automated Attendant (AA) and Voice Mail (VM) services when connected to the PBX.

The VPS and PBX communicate with each other by sending DTMF (Dual Tone Multi-Frequency) signals. For more information, refer to the documentation provided with the VPS.

1. AA Service

Allows the VPS to answer calls and direct callers to dial a number in order to connect themselves to the desired party (e.g., "Enter the extension number of the desired party."). It is possible to access VM service from AA service to, for example, record messages.

2. VM Service

Allows callers to leave voice messages for specific parties, such as an extension user. Extension users can then listen to the messages left in their mailboxes at their convenience.

AA Service

A VPS can be used for the AA service as well as the VM service. When a call is directed to a port of the VPS that is in AA service mode, the caller will hear an outgoing message (OGM). After or while listening to the OGM, the caller may dial an extension number as directed (e.g., "Enter the extension number of the desired party.").

If the VPS transfers a call via the AA service, the PBX will inform the VPS of the status of the called party using a DTMF status signal so that the VPS will know the status. This enables the VPS to quickly play an appropriate OGM to the caller (e.g., "I'm handling another call now...", "I'm away from my desk now...", etc.). The DTMF status signals sent by the PBX are explained below.

[DTMF Status Signals]

Status	Condition	DTMF Status Signal
Ringback Tone	The PBX is ringing the corresponding extension.	1
Busy Tone	The called extension is busy.	2
Reorder Tone	The dialled number is invalid.	3
DND Tone	The called extension has set DND (→ 1.3.1.3 Do Not Disturb (DND)).	4
Answer	The called extension has answered the call.	5
Confirm	The PBX confirms that a feature (such as Message Waiting) has been set or cancelled on the extension.	9
Disconnect	The caller has hung up.	#9
FWD to VM Ringback Tone	The called extension has set FWD to VPS (→ 1.3.1.2 Call Forwarding (FWD)) and the PBX is calling another port of the VPS.	6
FWD to VM Busy Tone	The called extension has set FWD to VPS and all ports of the VPS are busy.	7

1.19 Voice Mail Features

Status	Condition	DTMF Status Signal
FWD to Extension Ringback Tone	The PBX is calling an extension other than the one dialled, most likely because the called extension has set its calls to be forwarded to another extension or because it is a member of an idle extension hunting group (→ 1.2.1 Idle Extension Hunting).	8

System Programming

The following settings to enable Inband (DTMF) Integration must be programmed through system programming to match the settings of the VPS. This example uses a Panasonic KX-TVP series VPS, which can be connected to up to 2 extension jacks of the PBX.

[Programming Example: Voice Mail Table]

DTMF Integration*1	Voice Mail Port*2		Numbering Plan*3
	Jack 03	Jack 04	
Enable	Enable	Enable	Plan 1 or Plan 2

*1 → DTMF Integration [103]

*2 → DTMF Integration Port [102]

*3 → Extension Number [009]

In this example:

To enable the VM Hunting Chain and AA Hunting Chain, programme as follows:

- 1) Assign all Voice Mail extensions to one extension group in Extension Group [600].
- 2) Assign "Enable" to the group in Hunting Group Set [100].
- 3) Select the hunting type of the group in Hunting Type [101].

VM Service

1. Accessing a Mailbox

The PBX sends DTMF signals to the VPS to indicate which mailbox should be accessed (**Follow-on ID**).

2. Listening to Recorded Messages

After the VPS records a message, it will light the appropriate lamp or button on the extension for which the message was intended, to indicate that there is a new message (→ 1.17.1 Message Waiting). The proprietary telephone (PT) user can play the message back simply by pressing the MESSAGE button used for mailbox access. When the button is pressed, the PBX calls the voice mail extension, then sends DTMF signals to the VPS to indicate the extension's mailbox number.

A single line telephone (SLT) user hears a special dial tone (dial tone 3) when going off-hook if there are any messages in his or her mailbox, and can play the message back by entering the Message Waiting Answer feature number.

Conditions

- A VPS can be assigned as the destination for the following features:

- FWD—All Calls
- FWD—Busy/No Answer
- DISA Intercept Routing—No Answer (IRNA) (→ 1.1.1.2 Intercept Routing, 1.15.6 Direct Inward System Access (DISA))

For these features, the caller does not need to know the mailbox number of the called extension because the code is automatically transmitted to the VPS. If a DISA call is transferred to the VPS by IRNA from a DISA ring group, the PBX will transmit the mailbox number of the receiving extension with the lowest jack number.

- In order to achieve proper recording quality, Data Line Security should be turned on for the VPS (→ 1.10.5 Data Line Security).
- Each extension's mailbox number is the same as its extension number.
- If "TA series" cannot be selected with the PBX type setup menu of the KX-TVP series VPS, select "KX-T1232". Follow the steps for the KX-T1232.
- If a call is directed to a VPS port while the operator or manager is recording or playing back an OGM for DISA/UCD, the PBX cannot send a DTMF signal to the VPS, and so the VPS answers the call with an OGM (e.g., "Enter the extension number of the desired party.").

User Manual References

1.8.3 If a Voice Processing System is Connected

1.20 Administrative Information Output Features

1.20.1 Station Message Detail Recording (SMDR)

Description

Automatically logs detailed information for the PBX.

1. SMDR Output Port

The Serial Interface (RS-232C) port can be used to output Station Message Detail Recording (SMDR) data to a PC, printer, etc.

2. SMDR Output Data

Outside (CO) line call information (Incoming/outgoing) can be logged and sent to the SMDR output port.

3. SMDR Format and Contents

Date	Time	Ext.	CO	Dial number	Duration	Code
12/31/05	12:52PM	103	03	12345678901234567890123456789012	00:00'16"
12/31/05	12:53PM	103	02	< incoming >2013570846	00:01'43"
12/31/05	*12:54PM	101	02	< incoming >1234567890123456	00:07'48"
12/31/05	12:56PM	107	03	< DIL incoming >0921234557	00:01'43"
12/31/05	1:04PM	103	01	092... 1438	00:00'06"	4536
12/31/05	1:04PM	102	03	< DISA incoming >2013570846	00:00'09" 0
12/31/05	1:05PM	103	01	< DISA incoming >	00:00'08" 0
12/31/05	1:06PM	103	01	092123456789	00:00'08"
12/31/05	1:06PM	C-03	02	0921234567	00:00'17" 2
12/31/05	1:07PM	103	01	0921234567	00:11'00"	..13
12/31/05	2:15PM	103	01	0921234567	00:11'00"	.101
12/31/05	2:26PM	103	01	F/0927654321	00:03'00"
12/31/05	2:27PM	108	03	9=0924567123	00:13'55"
12/31/05	3:25PM		02	< UCD waiting >	00:11'48"

(1)

(2)

(3)

(4)

(5)

(6)

(7)

[Explanation]

The following table explains the types of data logged by SMDR. The section numbers below refer to the field indicated by the numbers above.

Section Number	Data	Description
(1)	Date	Shows the date (Month/Day/Year) of the call (→ Date & Time [000]). The date order varies depending on the user's country/area.
(2)	Time	Shows the start time of a call as hour/minute/AM or PM. Also shows the following code: *: Transferred call (→ 1.11.1 Call Transfer)
(3)	Ext. (Extension)	Shows the number of the extension that was engaged in the call. Also shows the following code: C-xx : Outside-to-Outside (CO-to-CO) line call via the DISA feature (→ 1.15.6 Direct Inward System Access (DISA)) (xx=Outside (CO) line number that receives the DISA call)
(4)	CO	Shows the outside (CO) line number used for the call.
(5)	Dial Number	<p>[Outside (CO) Line Call]</p> <p>Outgoing Outside (CO) Line Call Shows the dialled telephone number (max. 32 digits). Digits shown are as follows: 0 through 9, *, #, - (hyphen) F/: Flash/recall signal (→ 1.10.6 Flash/Recall) =: Host PBX Access code marker (→ 1.5.2.7 Host PBX Access Code (Access Code to the Telephone Company from a Host PBX)) The marker is displayed between the Host PBX Access code and the dialled number when a Host PBX Access code is entered. . (dot): Secret Dialling</p> <p>Incoming Outside (CO) Line Call Shows <incoming> + the caller's telephone number (max. 16 digits). A caller's telephone number is displayed only when an optional Caller ID card is installed and "With CID" is selected in Caller ID SMDR Format [906]. It is also possible to show a caller's telephone number before the call is answered (→ Caller ID SMDR Printout [907]). Also shows the following codes: <DISA incoming> + the caller's telephone number (max. 16 digits): Incoming outside (CO) line call via the DISA feature <DIL incoming>: Incoming outside (CO) line call via the DIL feature (→ 1.1.1.1 Direct In Line (DIL)) <UCD waiting>: Incoming outside (CO) line call via the UCD feature (→ 1.2.2 Uniform Call Distribution (UCD)) When the UCD waiting call is answered, a new record is started.</p>

1.20 Administrative Information Output Features

Section Number	Data	Description
(6)	Duration	Shows the duration of the outside (CO) line call or the UCD call waiting time in hours/minutes/seconds.
(7)	Code	Shows the account code appended to the call (→ 1.5.2.3 Account Code Entry), the account code index number (e.g., 13), the number of the extension that used the Walking COS feature (e.g., 101), or DISA security code status (e.g., 0). 0: A DISA incoming call without a DISA security code 1 to 4: A DISA incoming call with a DISA security code number Actual DISA security codes are not printed by SMDR (→ DISA Security Code [512]).

The following data can be controlled through system programming to adjust whether (or how) they are printed or displayed by SMDR.

[Programmable Items]

Item	Description
Incoming/Outgoing outside (CO) line call	Controls whether incoming/outgoing outside (CO) line calls are shown (→ Incoming/Outgoing Call Selection for Printing [802]). Even if "On" or "Toll" is selected for outgoing outside (CO) line calls or even if "On" is selected for incoming outside (CO) line calls, when "MODE 2" is selected in SMDR Mode for Printing [929], the call log information is not displayed by SMDR, but the information for each extension is displayed by Call Log Printout. If "Toll" is selected for outgoing outside (CO) line calls, only calls that are checked in TRS—COS 2-5 Denied Code [302-305] and are allowed, are shown.
Caller's identification	Controls whether a caller's telephone number is shown (→ Caller ID SMDR Format [906]). When this is set to display telephone numbers, even if the PBX receives a caller's name by the Caller ID feature, only the telephone number is shown.
Secret Dialling	Controls whether secret dialling numbers stored in System Speed Dialling Number [001] or stored in One-touch Dialling button are shown by SMDR (→ Secret Number SMDR Print Suppression [803]).
Account Code	Controls whether the account code stored in Account Code [310] or just the index of the account code is shown (→ SMDR Account Code [805]). The index of the account code is shown when "Verify-All" or "Verify-Toll" is selected in Account Code Mode [605].


Item	Description
System programming items	<p>Controls whether system programming items that have already been assigned are shown based on the following parameters (→ System Data Dump [804]):</p> <ul style="list-style-type: none"> a) All para: All data b) System para: All data except for "CO para", "Extn. para", "DSS para" and "Speed dial" c) CO para: The data assigned for each outside (CO) line d) Extn. para: The data assigned for each extension e) DSS para: The data assigned on the Direct Station Selection (DSS) buttons and Programmable Feature (PF) buttons on the DSS Console f) Speed dial: The System Speed Dialling numbers and names in System Speed Dialling Number [001] and System Speed Dialling Name [011] g) Stop output: Not shown

Conditions

- **Multilingual Display by SMDR**
It is possible to select the display language used for SMDR through system programming (→ SMDR Language [806]).
- The PBX waits for a preprogrammed length of time (→ Call Duration Counter Start [204]) after the end of seizing an outside (CO) line or dialling before starting the SMDR timer for outgoing outside (CO) line calls. When the PBX has sent out all dialled digits to the telephone company and this timer expires, the PBX begins measuring the duration of the call. A display proprietary telephone (PT) shows the elapsed time of the call. The starting time and the total duration of the call are logged by SMDR.
- **For SMS users**
When an SLT user makes an SMS centre call (→ 1.17.3 Fixed Line SMS Terminal Support), in some cases the duration of the call may not be verified with SMDR, because it takes very little time to send SMS messages. To verify the duration of these calls, it is recommended to set the start timer of call duration to "5 s" or "Instantly" through system programming (→ Call Duration Counter Start [204]).
- **SMDR Format**
The following SMDR format parameters can be set through system programming (→ SMDR Parameter [801]) in order to match the paper size being used by the printer:
 - a) Page Length:** determines the number of lines per page.
 - b) Skip Perforation:** determines the number of lines to be skipped at the end of every page.

The page length should be at least 4 lines longer than the skip perforation length.
The title is placed on the first 3 lines of every page.

1.20 Administrative Information Output Features

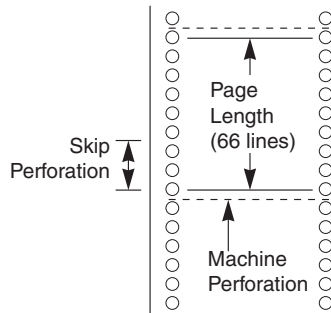

- **Serial Interface (RS-232C) Parameters**

The following communication parameters can be assigned for the Serial Interface (RS-232C port) through system programming (→ SMDR RS-232C Parameter [800]):

- a) **New Line (NL) Code:** Select the code appropriate for the PC or printer. If the PC or printer automatically feeds lines with carriage return, select "CR". If not, select "CR+LF".
- b) **Baud Rate:** Baud rate indicates the transmission speed of data from the PBX to the PC or printer.
- c) **Word Length:** Word length indicates how many bits compose each character.
- d) **Parity Bit:** Parity bit indicates what type of parity is used to detect errors in the string of bits composing a character. Make an appropriate selection depending on the requirements of the PC or printer.
- e) **Stop Bit Length:** Stop bit indicates the end of a bit string that composes a character. Select an appropriate value depending on the requirements of the PC or printer.

Installation Manual References

2.8.1 Connecting Peripherals

1.20.2 Call Log Printout for Each Extension

Description

An extension assigned as the manager extension can use the following features through manager programming:

- a) Call Log Print Out and Clear, for Each Extension
- b) All Clear

[Example]

The manager can print out call logs for each extension. Up to 500 outgoing outside (CO) line calls can be logged in the PBX. When the call log is full, the oldest call will be replaced each time a call is received. The call logs stored since the manager cleared the call log for the extension can be printed out.

* 103 : Tony Viola *							

(1)	Starting Date	:	Dec.29.05 07:00PM**				
	Present Date	:	Dec.31.05 09:00AM				
	Date	Time	Ext.	CO	Dial number	Duration	Code
	12/31/05	*12:52PM	103	03	12345678901234567890123456789012	00:00'16"
	12/31/05	1:06PM	103	01	092123456789	00:00'08"
	12/31/05	1:07PM	103	01	0921234567	00:11'00"	..13
	12/31/05	2:15PM	103	01	0921234567	00:11'00"	.101
	12/31/05	2:26PM	103	01	F/0927654321	00:03'00"

(1) "Starting Date" shows the start date (Month/Day/Year) of the call log. When it is different from "Present Date", "***" is shown, indicating that there may be overwritten calls that are not shown on the print out. The date order varies depending on the user's country/area.

Conditions

- Even if an extension user holds a call, the duration of the call will be counted. If an extension user transfers the call, the count of duration will restart at the destination extension.
- **SMDR Mode for Printing**
One of the following modes can be selected through system programming (→ SMDR Mode for Printing [929]):
 - a) **MODE 1**
Outside (CO) line call information can be displayed by SMDR (→ 1.20.1 Station Message Detail Recording (SMDR)), and call log information for each extension can be displayed by Call Log Printout.
 - b) **MODE 2**
Only call log information for each extension can be displayed by Call Log Printout.

User Manual References

3.2.2 Printing and Clearing Call Logs

1.21 Extension Controlling Features

1.21.1 Extension Feature Clear

Description

Extension users can simultaneously clear all of the following features set on their own telephone:

Feature	Value after Extension Feature Clear
Absent Message	Off
Automatic Callback Busy	Off
Background Music (BGM)	Off
Call Forwarding (FWD)	Off
Call Pickup Deny	Allow
Call Waiting	Disable
Data Line Security	Off
Do Not Disturb (DND)	Off
Executive Busy Override Deny	Allow
Hot Line	The stored telephone numbers will be cleared.
Log-in/Log-out	Log-in
Message Waiting	All messages left by other extensions will be cleared.
Paging Deny	Allow
Room Monitor	Off
Timed Reminder	Cleared
Voice Mail Integration	Off

This feature is also known as Station Feature Clear or Station Programme Clear.

User Manual References

1.7.8 Clearing Features Set at Your Extension (Extension Feature Clear)

1.21.2 Timed Reminder

Description

Each extension user can set an alarm to be used as a wake-up call or reminder. This feature can be programmed to activate daily or one time only. If the user goes off-hook during the alarm, a special dial tone (dial tone 3) will be heard.

Remote Timed Reminder

An extension assigned as the operator or manager extension can remotely set, cancel, and confirm the timed reminder of the desired extension. This feature is useful, for example, for a small hotel or motel to set a wake-up call for an extension in a guest room, or for a parent to set a wake-up call for an extension in a child's room.

Conditions

- Be sure that the PBX clock is set to the correct time.
- Setting a new alarm time clears the previous alarm time.
- There is no limit for the number of the extensions that can set Timed Reminder at the same time.

User Manual References

1.7.1 Setting the Alarm (Timed Reminder)

2.1.3 Setting an Alarm for Other Extensions (Remote Timed Reminder [Wake-up Call])

1.22 Audible Tone Features

1.22.1 Dial Tone

Description

The following dial tones inform extension users about features activated on their extensions:

Type	Description
Tone 1	A normal dial tone is heard when none of the features listed for dial tones 2 and 3 have been set.
Tone 2	Heard when any of the following features is set. <ul style="list-style-type: none"> • Absent Message • Background Music (BGM) (for proprietary telephones [PTs] only) • Call Forwarding (FWD) • Call Pickup Deny • Data Line Security • Do Not Disturb (DND) • Extension Lock • Hot Line (for single line telephones [SLTs] only) • Message Waiting (for PTs only) • Remote Extension Lock • Timed Reminder
Tone 3	Heard when any of the following features is performed. <ul style="list-style-type: none"> • Account Code Entry • Answering a call from Timed Reminder • Going off-hook with an SLT that has messages waiting

Conditions

- **Dial Tone Type for ARS/Account Code Entry (Verify-Toll mode only)**
Through system programming, it is possible to select the dial tone type for the Automatic Route Selection (ARS)/Account Code Entry (Verify-Toll mode only) feature (→ ARS Dial Tone [362]).

Feature Guide References

4.2.1 Tones/Ring Tones

1.22.2 Confirmation Tone

Description

At the end of a feature operation, the PBX confirms the success of the operation by sending a confirmation tone to the extension user.

Type	Description
Tone 1	Sent when the setting is accepted, or sent when the Extension Lock feature is set or cancelled.
Tone 2	Sent when the new setting is identical to the previous one, or sent when certain features are successfully performed or accessed (e.g., Call Hold, Automatic Callback Busy).
Tone 3	Sent before a conversation is established when accessing the following features: <ul style="list-style-type: none">• Call Pickup• Call Hold Retrieve with the Feature Number• Conference• Paging/Paging Answer

Conditions

- It is possible to eliminate confirmation tone 3 (except for Call Hold Retrieve with the Feature Number) through system programming (→ Call Pickup Tone [117], Conference Tone [105], External Pager Access Tone [106]).

Feature Guide References

4.2.1 Tones/Ring Tones

1.22 Audible Tone Features

Section 2

System Configuration and Administration Features

2.1 System Configuration—Hardware

2.1.1 Extension Jack Configuration

Description

Extension jacks are used to connect proprietary telephones (PTs), single line telephones (SLTs), Direct Station Selection (DSS) Consoles, and Voice Processing Systems (VPSs) to the PBX.

Conditions

- **PT and SLT in Parallel Mode**
A PT and an SLT can be connected to an extension jack and used in parallel mode.
- **DSS Console and Paired Telephone Assignment**
When a DSS Console is connected, a PT must be paired with the DSS Console through system programming (→ DSS Console Jack Assignment [003], Console Paired Telephone [004]). Each extension jack number should be unique.
- **Automatic Detection**
A PT and an SLT can be connected to an extension jack with no programming required.

2.2 System Configuration—Software

2.2.1 Class of Service (COS)

Description

Each extension is assigned a class of service (COS) number (→ TRS-COS—Day/Night/Lunch [601-603]). The following features operate differently depending on an extension's COS.

- a) TRS (→ 1.8.1 Toll Restriction (TRS))
- b) Walking COS (→ 1.8.4 Walking COS)

Conditions

- **Walking COS**
An extension user can make a call from an extension with a lower COS by using his or her own COS temporarily.

User Manual References

1.2.6 Using Your Calling Privileges at Another Extension (Walking COS)

2.2.2 Group

Description

This PBX supports various types of groups.

1. Outside (CO) Line Group

Outside (CO) lines can be grouped into 3 outside (CO) line groups based on properties such as carrier or outside (CO) line type (→ CO Line Group Number [404]).

Each outside (CO) line can belong to only one outside (CO) line group.

2. Extension Group

Extensions can be grouped into 8 extension groups (→ Extension Group [600]).


Each extension group can have the following attribute set:

- a) Call Pickup Group
- b) Paging Group
- c) Idle Extension Hunting Group
- d) Uniform Call Distribution (UCD) Group
- e) Direct Inward System Access (DISA) Ring Group

Every extension must belong to one extension group and cannot belong to more than one extension group.

Assignable Extensions: Proprietary telephones (PTs)/single line telephones (SLTs)

[Example]

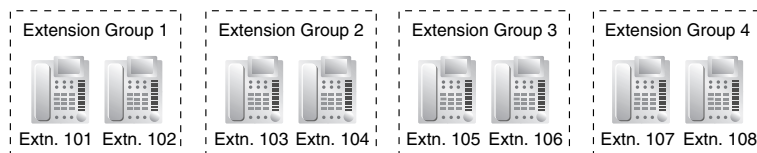

2.1. Call Pickup Group

Using the Call Pickup feature, extensions can answer any calls within the call pickup group to which they belong.

2.2. Paging Group

Using the Paging feature, extensions can make a page to any paging group, or answer a page made to any group.

2.3. Idle Extension Hunting Group

If a called extension is busy, Idle Extension Hunting redirects the incoming call to an idle member of the same extension group (→ Hunting Group Set [100]). When calls are received, idle extensions are automatically searched for according to a preprogrammed hunting type (→ Hunting Type [101]): Circular Hunting or Terminated Hunting.

2.4. Uniform Call Distribution (UCD) Group

A UCD group is a group of extensions that receives UCD calls directed to the group (→ UCD Group [520]). To use this feature, "UCD" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]).

2.5. Direct Inward System Access (DISA) Ring Group

A DISA ring group is a specific extension group that receives DISA calls directed to the group. All extensions in the group assigned as an Automated Attendant (AA) destination (→ DISA Built-in AA [501]) ring simultaneously. To use this feature, "DISA" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]) and "With AA" must be selected as the destination of incoming outside (CO) line calls via the DISA feature (→ DISA Incoming Call Dial Mode [500]).

Feature Guide References

- 1.2.1 Idle Extension Hunting
- 1.2.2 Uniform Call Distribution (UCD)
- 1.2.3 Direct Inward System Access (DISA) Ring
- 1.4.1.3 Call Pickup
- 1.14.1 Paging

2.2.3 Time Service

Description

Time service modes are used by many PBX features to determine how they will function during different times of day. For example, incoming calls can be directed to sales staff during the day and to a Voice Processing System (VPS) at night, extension users can be prohibited from making long-distance calls during lunch time, etc.

There are 3 time service modes—day, night, and lunch. The start times of each time service mode and end time of lunch mode are programmed for each day of the week in a Time Table.

1. Time Service Switching Mode

The current time service mode can switch automatically to another time service mode at the time assigned in the Time Table. It is possible, however, to switch time service modes manually. Whether time service modes are normally switched manually or automatically is determined through system programming (→ Time Service Switching Mode [006]).

Switching Mode	Description	Condition
Automatic	The current time service mode will switch automatically to another time service mode at the time assigned in the Time Table, and can be switched manually by pressing the Day, Night, or Lunch button or by entering the Time Service feature number.	The current time service mode (day/night/lunch) and the switching mode (automatic/manual) can be switched manually by an extension assigned as the operator or manager extension.
Manual	The current time service mode will switch only when the Day, Night, or Lunch button is pressed or when the Time Service feature number is entered.	


2. Time Table

A Time Table has 3 modes—day, night, and lunch. A Time Table can be programmed to control when each time service mode starts (and therefore, the previous time service mode ends), and can be programmed separately for each day of the week.

[Programming Example: Time Table]

Time Schedule*	Day	Night	Lunch	
	Start Time	Start Time	Start Time	End Time
Sunday	Not Stored	Not Stored	Not Stored	Not Stored
Monday	09:00	17:00	12:00	13:00
Tuesday	09:00	17:00	12:00	13:00
(Cont.) :	:	:	:	:
:	:	:	:	:

* → Time Service Start Time [007]

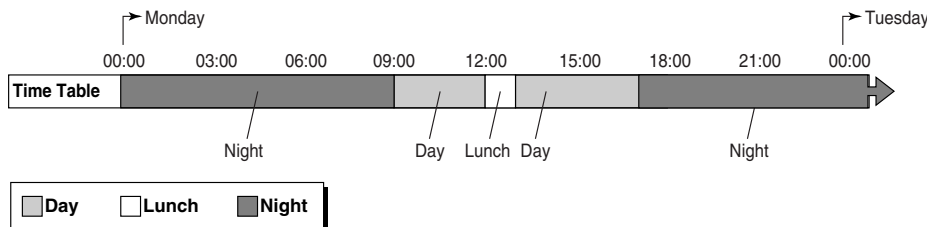[Visualisation of Time Schedule]

Note that time service modes can be arranged as they are needed (for example, night mode can occur in the morning and afternoon, if necessary) and not all time service modes need to be used in a time schedule. Also note that day mode or night mode resumes automatically when lunch mode ends.

3. Programming Items Using Time Service

The following programming items will be affected by the time service:

- a) Flexible Outward Dialling—Day/Night/Lunch [405-407]
- b) Flexible Ringing—Day/Night/Lunch [408-410]
- c) Delayed Ringing—Day/Night/Lunch [411-413]
- d) CO Line Mode—Day/Night/Lunch [414-416]
- e) DRD Ring Pattern 2 Extension Assignment—Day/Night/Lunch [427-429] (New Zealand only)
- f) DRD Ring Pattern 3 Extension Assignment—Day/Night/Lunch [430-432] (New Zealand only)
- g) TRS-COS—Day/Night/Lunch [601-603]
- h) Doorphone Ringing—Day/Night/Lunch [700-702]
- i) Door Opener—Day/Night/Lunch [703-705]

4. Day/Night/Lunch Button

A flexible Direct Station Selection (DSS) button can be customised as a Day, Night, or Lunch button by the operator or manager.

These buttons can be used to switch the current time service mode.

Each button shows the current status as follows:

Light Pattern	Status
Off	Day/Night/Lunch off
Red on	Day/Night/Lunch on

Note

Extension users can press the "#" key on their proprietary telephones (PTs) to display the current time service mode.

Conditions

- The start times of each time service mode and end time of lunch mode can be specified through system programming (→ Time Service Start Time [007]).

Feature Guide References

1.18.2 Flexible Buttons

User Manual References

1.7.7 Checking the Time Service Mode

2.1.2 Switching the Time Service Mode (Time Service)

2.2.4 Operator/Manager Features

Description

This PBX supports one operator and one manager. Any extension can be designated as the operator through system programming (→ Operator Assignment [008]). The operator is the destination of Operator Call. The extension connected to extension jack 01 is the manager extension. An extension assigned as the operator or manager extension is allowed to use certain features that most extensions cannot, as follows:

Feature		Description	Manager Password*	Details in
Manager Programming	System Speed Dialling Number [001]	Sets the System Speed Dialling number.	Required	• 1.6.1.5 Speed Dialling—Personal/System
	System Speed Dialling Name [011]	Sets the System Speed Dialling name.	Required	• 1.6.1.5 Speed Dialling—Personal/System
	DISA Security Code [512]	Sets the DISA security code.	Required	• 1.15.6 Direct Inward System Access (DISA)
	DISA Security Code Digits [530]	Sets the number of digits for the DISA security code.	Required	• 1.15.6 Direct Inward System Access (DISA)
	Call Log Printout for Each Extension	Prints and clears call logs for each extension.	Required	• 1.20.2 Call Log Printout for Each Extension
	Extension Password Set	Sets the extension password. This password is used for the Walking COS feature and the Remote Extension Lock feature. Each extension's password should be unique.	Required	–
Remote Extension Lock		Sets or cancels Extension Lock on an extension remotely.	Not required	• 1.8.3 Extension Lock
Time Service		Switches the time service mode manually.	Not required	• 2.2.3 Time Service
Remote Timed Reminder (Wake-up Call)		Sets or cancels Timed Reminder to any extension remotely.	Not required	• 1.21.2 Timed Reminder
Incoming Call Log in the Common Area—CLEAR ALL		Clears all Caller ID information stored in the common area.	Not required	• 1.16.2 Incoming Call Log

Feature	Description	Manager Password*	Details in
Incoming Call Log Display Lock in the Common Area	Locks or unlocks the Incoming Call Log for the common area.	Not required	<ul style="list-style-type: none"> • 1.8.3 Extension Lock • 1.16.2 Incoming Call Log
301st Incoming Call Logged in the Common Area	Selects how new calls are treated when Incoming Call Log for the common area is full.	Not required	<ul style="list-style-type: none"> • 1.16.2 Incoming Call Log
Outgoing Message (OGM) for DISA/UCD	Records and plays back OGMs used by DISA, Uniform Call Distribution (UCD), and 3-level Automated Attendant (AA). Erases OGMs used by DISA and UCD.	Not required	<ul style="list-style-type: none"> • 1.15.5 Outgoing Message (OGM) for DISA/UCD
Date and Time Setting	Adjusts the current date and time.	Not required	—
Extension Lock—CANCEL ALL	Cancels Extension Lock, Incoming Call Log Display Lock in the Personal Area, and Message Waiting for Another Extension Lock at all extensions.	Not required	<ul style="list-style-type: none"> • 1.8.3 Extension Lock • 1.16.2 Incoming Call Log • 1.17.1 Message Waiting
LCS Password Control	Clears the Live Call Screening (LCS) password.	Not required	<ul style="list-style-type: none"> • 1.19.1 Voice Mail APT Integration

* The system password may be entered instead of the extension password for the manager (manager password).

Operator Call

An extension user can call the operator by entering the Operator Call number (→ Automatic Line Access [121]), often simply, "0". If no operator is assigned, the caller will hear a reorder tone. If the Automatic Line Access number is assigned to "0" through system programming, the Operator Call number will be changed to "9".

Note

For New Zealand, the Automatic Line Access number may be either 1 or 9.

User Manual References

- 1.2.1 Basic Calling
- 2.1 Control Features
- 3.2.2 Printing and Clearing Call Logs

2.3 System Data Control

2.3.1 PC Programming

Description

System programming settings can be accessed using a PC and the Panasonic KX-TEB308 Maintenance Console software as well as by using a proprietary telephone (PT) (→ 2.3.2 PT Programming). System programming and data upload/download can be performed either through on-site programming or remote programming.

1. **On-site Programming:** Programming that is performed using an on-site PC connected directly to the PBX.
2. **Remote Programming:** Programming that is performed using an off-site PC that connects to the PBX via an outside (CO) line.

Note

The release date of the KX-TEB308 Maintenance Console software will vary depending on the user's country/area.

1. Connection Methods for On-site Programming

Method	Description	Required Hardware
Serial Interface (RS-232C port)	The PC is connected to the PBX via the Serial Interface (RS-232C port) of the PBX.	—
USB	The PC is connected to the PBX via the USB port of the PBX.	—

2. Connection Methods for Remote Programming

Method	Description	Required Hardware
Remote modem	<p>Call the PBX and have the call directed to the internal modem using one of the following methods:</p> <p>Direct Access: Using a modem, dial the telephone number to connect to the internal modem. To use this feature, "MODEM" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]).</p> <p>DISA: Using a telephone, dial the telephone number to reach the DISA line (→ 1.15.6 Direct Inward System Access (DISA)). After hearing a DISA outgoing message (OGM), enter the Remote Maintenance feature number to access the internal modem. To use this feature, "DISA" must be selected as the distribution method for the desired outside (CO) line port (→ CO Line Mode—Day/Night/Lunch [414-416]).</p> <p>Call Transfer: Using a telephone, call an extension user, such as the operator, to request to be transferred to the internal modem using the Remote Maintenance feature number (→ 1.11.1 Call Transfer).</p>	User-supplied modem

Conditions

- Only one system programming session is permitted at a time. Access will be denied to a second party who tries to perform system programming, including system programming via a PT.
- System programming can be performed either in interactive or batch mode.
- **System Password**
To access system programming in interactive mode, a valid password must be entered. The password is set at the factory but can be changed through system programming (→ System Password [002]).
- A user can upload system programming data from a PC to the PBX or download it from the PBX to a PC.
- If communications between the PBX and PC fail before completing Firmware Upgrade or system programming data upload from a PC to the PBX, the successfully transferred portion of the data can still be used.
- Firmware Upgrade can be performed only through on-site programming using Serial Interface (RS-232C port) or USB.

Installation Manual References

- 3.2.1 Connection
- 3.2.3 Accessing PBX via Internal Modem

Feature Guide References

- 1.1.1.1 Direct In Line (DIL)

3.2 PC Programming

2.3.2 PT Programming

Description

A proprietary telephone (PT) can be used to customise the settings of the PBX or of an extension, using the following programming features:

Programming Type	Description	Example	Authorised Programmer
Personal Programming	Used by an extension user to customise the extension's settings.	One-touch Dialling, Line Preference—Outgoing, etc.	Extension user
System Programming	Used by an authorised party to customise the PBX.	System Password, Extension Number, etc.	Authorised administrator
Manager Programming	Used by the manager to customise 4 system programming settings of the PBX, set a password to each extension, and print out call log information for each extension.	System Speed Dialling Number, Extension Password Set, Call Log Printout for Each Extension, etc.	Manager

Conditions

- The manager extension is the extension that is connected to the lowest-numbered jack (jack 01) of the PBX and can therefore perform manager programming.
- Only one system programming (including PC programming) or manager programming session is permitted at a time. These 2 programming features cannot be performed simultaneously by 2 users.
- During programming, the PT is considered to be busy and will not receive calls.
- **System Password**
To access system programming, the administrator system password must be entered. The system password is set at the factory but can be changed through system programming (→ System Password [002]). The administrator can programme all system programming.
- **Manager Password**
To set the manager password, it is necessary to use the system password to perform Extension Password Set. Once set, the manager password can be used to access manager programming. The manager can assign a password to each extension (extension password).
- **Personal Programming Data Reset**
A PT user can simultaneously reset all settings made through personal programming (Line Preference—Incoming/Outgoing, Call Waiting Tone Type Selection, etc.) to their default settings. This feature also cancels pressing the AUTO ANS/MUTE button in the Hands-free Answerback feature and the Room Monitor feature.
- **System Programming Data Reset**
The PBX can return all or specific settings made through system programming to their default settings based on the following parameters (→ System Data Clear [999]):
 - All para:** All data
 - System para:** All data except for "CO para", "Extn. para", and "DSS para"
 - CO para:** The data assigned for each outside (CO) line
 - Extn. para:** The data assigned for each extension

- e) **DSS para:** The data assigned on the Direct Station Selection (DSS) buttons and Programmable Feature (PF) buttons on the DSS Console
- f) **Speed dial:** The System Speed Dialling numbers and names in System Speed Dialling Number [001] and System Speed Dialling Name [011]

Installation Manual References

2.10.1 Starting the Advanced Hybrid System

Feature Guide References

2.2.4 Operator/Manager Features

3.3 PT Programming

User Manual References

3.1 Customising Your Phone (Personal Programming)

3.2 Managing Call Logs

3.3 Customising Your PBX (System Programming)

2.3.3 Automatic Time Adjustment

Description

The PBX clock can be adjusted automatically according to the time information received from your telephone company. Time information can be received when an incoming call with Caller ID that includes time information is received.

The PBX clock will be adjusted every day with the first call after 3:05 A.M., if enabled through system programming (→ Automatic Time Adjustment [152]).

Note

Since the PBX clock is put ahead by one hour on the Summer Time start date, a timed reminder set within one hour of the Automatic Time Adjustment feature will not ring.

Since the PBX clock is put back by one hour on the Summer Time end date, a timed reminder set within one hour before the Automatic Time Adjustment feature will ring 2 times.

Conditions

- SMDR will log call information using the PBX clock so that the logging time will be overlapped at the end of Summer Time (→ 1.20.1 Station Message Detail Recording (SMDR)).

Feature Guide References

1.21.2 Timed Reminder

2.3.4 Feature Numbering

Description

To call another extension user or to access PBX features, access numbers (extension numbers or feature numbers) are required.

Feature numbers are available while:

1. a dial tone is heard
2. a busy tone or Do Not Disturb (DND) tone is heard
3. dialling or talking
4. on-hook

1. Feature Numbering (available while a dial tone is heard)

Extension numbers and features that are available while a dial tone is heard have fixed numbers and flexible numbers respectively, shown in the following table:

a) Extension Numbers:

The extension numbering plan can be selected through system programming (→ Extension Number [009]).

When the extension numbering plan is selected, the default extension numbers change automatically as follows*:

Plan 1/Plan 2: extension jacks 01 through 08—extension numbers 101 through 108

Plan 3: extension jacks 01 through 08—extension numbers 11 through 18

If a rotary single line telephone (SLT) is used at any extension, select "Plan 1".

Note

* For United Kingdom and New Zealand, when the extension numbering plan is selected, the default extension numbers change automatically as follows:

Plan 1/Plan 2: extension jacks 01 through 08—extension numbers 201 through 208

Plan 3: extension jacks 01 through 08—extension numbers 21 through 28

b) Feature Numbers:

When "Plan 2" or "Plan 3" is selected, feature numbers starting with "7" are useable with and without "#" added before "7".

[Example]

The default feature number for setting "Do Not Disturb (DND)" is "714#". "714#" and "#714#" are both available for "Plan 2" and "Plan 3".

To make them easier to remember, it may be helpful to replace the new feature numbers for "Plan 2" and "Plan 3" with the code numbers 50 through 59, through system programming (→ Second Feature Numbering Plan [012]).

2.3 System Data Control

[Feature Numbering Table (available while a dial tone is heard)]

Feature	Numbering			Additional Number
	Plan 1	Plan 2	Plan 3	
Absent Message (set/cancel)	75			(1–6 [+ parameter]/0) + #/0
Account Code Entry for an SLT	** or 49	**		account code + outside phone no.
Automatic Line Access (Local Access)* ¹	9/0			outside phone no.
Call Forwarding (FWD)—All Calls, Busy/No Answer (set/cancel)	71			[(1 or 2 + extn. no.)/0] + #/0
Call Hold (Hold Mode 2 or 3) for an SLT* ²	20	#20		
Call Hold Retrieve for outside (CO) line calls/intercom calls	53/5	#59/#5		outside (CO) line no. (1–3)/extn. no.
Call Park/Call Park Retrieve* ³	22/52	#22/#56		0–9
Call Pickup Deny (set/cancel)	72			(1/0) + #/0
Call Waiting for intercom calls/doorphone calls (set/cancel)	732			(1/0) + #/0
Call Waiting for outside (CO) line calls (set/cancel)	731			(1/0) + #/0
Conference (5-party)	22*	#22*		(phone no. + CONF) 4 times + CONF
Data Line Security (set/cancel)	730			(1/0) + #/0
Directed Call Pickup	4	#41		extn. no.
Do Not Disturb (DND) (set/cancel)	71			(4/0) + #/0
Doorphone Call/Door Open	31/55	#31/#55		1/2
Executive Busy Override Deny (set/cancel)	733			(0/1) + #/0
Extension Lock (set/cancel)	77			0000–9999 (2 times/one time) + #/0
Extension Number* ⁴	100–199	100–499	10–49	
External Feature Access (EFA) for an SLT	6			
Extension Feature Clear	79			#/0
FWD—Follow Me (set/cancel)	71			(5/8) + extn. no. + #/0
FWD to Outside (CO) Line (set/cancel)	71			(3 + outside (CO) line access no. + outside phone no. + #)/(0 + #/0)
FWD to Voice Processing System (VPS) (set/cancel)	71			[(1 or 2 + extn. no.)/0] + #/0
Group Call Pickup	40	#40		

Feature	Numbering			Additional Number
	Plan 1	Plan 2	Plan 3	
Hot Line for an SLT (programme)	74			2 + phone no. + #
Hot Line for an SLT (set/cancel)	74			(1/0) + #/0
Incoming Call Log in the Personal Area—CLEAR ALL	70✖			#
Incoming Call Log in the Common Area—CLEAR ALL	70✖✖			#
Last Number Redial for an SLT	## or 80	### or 80		
Live Call Screening (LCS) Password (set/cancel)	77✖			000–999 (2 times/one time) + #
Log-in/Log-out	736			(0/1) + #/0
Logging of Caller ID Information in the Common Area (set/cancel)	738			(2/0) + #/0
Logging of Caller ID Information in the Personal Area (set/cancel)	738			(1/0) + #/0
Message Waiting (leave/cancel for a caller)	70			(1/2) + extn. no. + #/0
Message Waiting (cancel all for a called extension)	70			0 + #/0
Message Waiting (cancel all for another extension)	70			3 + extn. no. + #
Message Waiting Answer	784			#/0
Message Waiting for Another Extension Lock (set/cancel)	70			4000–9999 (2 times/one time) + #/0
Operator Call	0/9			
Outside (CO) Line Group Access	8			1–3 + outside phone no.
Paging—All Extensions & External	33	#33		✖ or 9
Paging—All Extensions/Group	33	#33		0/1–8
Paging—External	34	#34		
Paging Answer	43	#43		
Paging Deny (set/cancel)	734			(1/0) + #
Personal Speed Dialling (confirm)	3✖			0–9 + #
Personal Speed Dialling (dial)	1✖ or #	1✖ or ##		0–9
Personal Speed Dialling (programme)	2✖			0–9 + phone no. + #
Remote Maintenance	729			

2.3 System Data Control

Feature	Numbering			Additional Number
	Plan 1	Plan 2	Plan 3	
Remote Timed Reminder (set/cancel/confirm)	764			extn. no. + # + 76 + ([hhmm + parameter]*5/2/3) + #
Room Monitor (set/cancel)	735			(1/0) + #
Room Monitor through a doorphone	31	#31		1/2
System Speed Dialling for an SLT (dial)	✖			00–99
Timed Reminder (set/cancel)	76			([hhmm + parameter]*5/2) + #/0
Timed Reminder (confirm)	76			3 + #
Time Service (set/cancel)	78			([1–3]/0) + #
Walking COS	7✖			extn. password + the user's extn. no. + #/0
21st Incoming Call Logged in the Personal Area (disregard the newest call/overwrite the oldest call)	737			(0/1) + #
301st Incoming Call Logged in the Common Area (disregard the newest call/overwrite the oldest call)	737			(2/3) + #

*1 For New Zealand: 1 or 9

*2 For United Kingdom/New Zealand: Plan 1: 50; Plan 2/Plan 3: #50

*3 For United Kingdom/New Zealand: Plan 1: 36/56; Plan 2/Plan 3: #36/#56

*4 For United Kingdom/New Zealand: Plan 1: 200–299; for New Zealand: Plan 2: 200–499, Plan 3: 20–49

*5 hh: hour (01–12), mm: minute (00–59), AM/PM (0/1), one time/daily (1/2)

2. Feature Numbering (available while a busy tone or DND tone is heard)

Features that are available while a busy tone or DND tone is heard have fixed numbers, as shown in the following table:

[Feature Numbering Table (available while a busy tone or DND tone is heard)]

Feature	Numbering
Automatic Callback Busy	6
Busy Station Signalling (BSS)/DND Override	2
Executive Busy Override	3

3. Feature Numbering (available while dialling or talking)

Features that are available while dialling or talking have fixed numbers, as shown in the following table:

[Feature Numbering Table (available while dialling or talking)]

Feature	Numbering
Alternate Calling—Ring/Voice	✖
Call Retrieving from a Telephone Answering Machine (TAM)	4*1
Conference (3-party) for an SLT	3*2
Door Open	5
Pulse to Tone Conversion	✖#

*1 Dial after dialling the TAM's extension number and hearing its busy tone.

*2 Plan 1: 3; Plan 2/Plan 3: #3

4. Feature Numbering (available while on-hook)

Features that are available while on-hook have fixed numbers, as shown in the following table:

[Feature Numbering Table (available while on-hook)]

Feature	Numbering
Background Music (BGM) set/cancel	1
Time Service mode display	#
Extension number and extension name display/ date (month [day]/day [month]) and time display/ date (month [day]/day [month]/year/day of the week) display changing	✖

Conditions

- If a feature number includes "✖" or "#", except for those that can use "0" instead of "#", rotary SLT users cannot use it.
- **Feature number + Additional number (Parameter)**
Certain feature numbers require additional digits to make the feature active. For example, to set Call Waiting, the feature number for "Call Waiting" must be followed by "1" and to cancel it, the same feature number should be followed by "0".

User Manual References**4.2.1 Feature Number Table**

2.3.5 Automatic Configuration for Outside (CO) Line Type

Description

The dialling mode (DTMF [Dual Tone Multi-Frequency]/Pulse) of connected outside (CO) lines is automatically assigned after restarting the PBX using the System Clear Switch or through system programming (→ System Data Clear [999]). No system programming in Dial Mode [401] and Pulse Speed [402] is required unless the dialling mode of the connected outside (CO) line is Call Blocking. Automatic Configuration for Outside (CO) Line Type can also be programmed the first time the PBX is accessed with a PC using the KX-TEB308 Maintenance Console software (Quick Setup). For more information about Quick Setup, refer to the Installation Manual (→ 3.1.1 Installing KX-TEB308 Maintenance Console on a PC).

Conditions

- If no outside (CO) lines are connected to the outside (CO) line ports of the PBX, the default values are assigned automatically.
- It takes a maximum of 4 minutes to complete checking the dialling mode, unless the outside (CO) line is in use. In this case, the PBX will start checking it after the outside (CO) line becomes idle.
- This feature will not function properly when:
 - It takes 3 seconds or more to detect the dialling mode of your telephone company.
 - The cable from the outside (CO) line is disconnected while the PBX is checking the dialling mode.
- If your telephone company or a host PBX can receive both DTMF and Pulse signals, the PBX selects an outside (CO) line type according to the following priority:
DTMF → Pulse (High) → Pulse (Low)

Installation Manual References

4.1.5 System Reset with System Data Clear

Feature Guide References

1.5.2.4 Dial Type Selection

2.3.6 Country Setting

Description

The country code of the PBX can be selected through system programming (→ Country [995]). The PBX will restart with the default settings of the user's country/area. During this operation, communication between the PBX and PC will be disconnected one time. Country Setting can also be programmed the first time the PBX is accessed with a PC using the KX-TEB308 Maintenance Console software (Quick Setup). For more information about Quick Setup, refer to the Installation Manual (→ 3.1.1 Installing KX-TEB308 Maintenance Console on a PC).

Conditions

- This feature is only available when the suffix of the connected PBX is "NE" or "CE".

2.3.7 Firmware Upgrade

Description

It is possible to upgrade the PBX software via the Serial Interface (RS-232C port) or USB port using the KX-TEB308 Maintenance Console software. Even if a user upgrades the PBX software, the system data will not be lost. For more information on how to upgrade the PBX software, refer to the on-line help.

Conditions

- The ROM and the firmware version can be confirmed through system programming (→ Firmware Version [998]).

Installation Manual References

2.8.1 Connecting Peripherals

2.4 Fault Recovery/Diagnostics

2.4.1 Power Failure Transfer

Description

If the power supply to the PBX fails, outside (CO) line 1 will be automatically connected to extension jack 01 (**Power Failure Connections**). The PBX will switch from the current connections to Power Failure Connections, and all existing conversations will be disconnected.

Only outside (CO) line calls handled by Power Failure Connections can be made during a power failure.

Conditions

- We recommend connecting an SLT in parallel at extension jack 01, so that the SLT can be used during a power failure.
Note that if the paralleled SLT is on an outside (CO) line call when the power is restored, that call will be disconnected.
- Only outside (CO) line calls are possible during a power failure. All other features will not function.
- Automobile-type batteries, which must be user-supplied, can be connected as a system backup power supply to operate all the features during a power failure.
The batteries can be connected directly to the unit with optional cables. For more information, refer to the Installation Manual.

Installation Manual References

2.2.6 Connecting Backup Batteries

2.9 Power Failure Connections

Feature Guide References

1.10.9 Paralleled Telephone

2.4.2 Power Failure Restart

Description

When the electricity is turned back on, the PBX restarts and automatically loads stored data.

Conditions

- In the event of a power failure, PBX memory is protected by a factory-installed lithium battery. There is no memory loss except the memories of Automatic Callback Busy (→ 1.7.1 Automatic Callback Busy (Camp-on)), Call Park (→ 1.12.2 Call Park), and Redial (→ 1.6.1.4 Redial).

Section 3

Programming Instructions

3.1 Introduction

3.1.1 Introduction

These programming instructions are designed to serve as an overall system programming reference for the Panasonic Advanced Hybrid System. The PBX has default settings that can be changed to meet your needs. These settings control the manner in which the PBX features described in this Feature Guide function, and changing these settings is referred to as "system programming". System programming can be performed by only one person at a time. A second person attempting to programme the system will be denied access to system programming.

Ways to Programme

There are 2 programming methods:

- **PC Programming**
PC programming is described in Section 3.2 PC Programming.
- **PT (Proprietary Telephone) Programming**
PT programming is described in Section 3.3 PT Programming. An authorised administrator or the manager can perform system programming by entering 3-digit programming numbers with a PT.

Password Security

To maintain system security, a password is required to perform system programming. When KX-TEB308 Maintenance Console is started for the first time, the Quick Setup utility will ask you to set the system password. To avoid unauthorised access and possible fraudulent dialling, do not disclose the password.

Warning to the Administrator or Installer regarding the system password

1. Please inform the customer of the importance of the password and the possible dangers if it becomes known to others.
2. To avoid unauthorised access and possible fraudulent dialling, maintain the secrecy of the password.
3. We strongly recommend that you change the default password value to something else for reasons of system security. It is best to use a password of 7 digits.
4. Please change the password periodically.
5. If a system password is forgotten, it can be found by loading a backup of the system data into a PC, and checking the password using the KX-TEB308 Maintenance Console software. If you do not have a backup of the system data, you must reset the PBX to its factory defaults and reprogramme it. Therefore, we strongly recommend maintaining a backup of the system data. For more information on how to back up the system data, refer to the on-line help that appears by selecting the Help menu during PC programming. However, as system passwords can be extracted from backup copies of the system data file, do not allow unauthorised access to these files.

Note

This PBX has only one system password. It can be changed by either PT programming or PC programming. For this reason, the password can consist of numerals only.

3.2 PC Programming

3.2.1 Installing and Starting KX-TEB308 Maintenance Console

To programme and administer the PBX by PC (Personal Computer), you need to install KX-TEB308 Maintenance Console onto the PC. To install and start KX-TEB308 Maintenance Console when the PC and the PBX are connected, refer to the Installation Manual (→ 3.1.1 Installing KX-TEB308 Maintenance Console on a PC). KX-TEB308 Maintenance Console starts the programme using the drive where you installed the software automatically.

Note

The release date of KX-TEB308 Maintenance Console will vary depending on your country/area.

System Requirements

Operating System

- Microsoft® Windows® 98 SE, Windows Me, Windows 2000, or Windows XP

Hardware

- CPU: 300 MHz Intel® Celeron® or faster
- RAM: At least 128 megabytes (MB) of available RAM
- Hard disk space: At least 100 MB of space for the installation, and approximately 2 MB of additional space for user files.

3.3 PT Programming















3.3.1 Programming Instructions

Required Telephone

PBX settings can be customised through system programming by using a proprietary telephone (PT) with a display, such as the KX-T7730. An authorised administrator or the manager extension connected to extension jack 01 can access system programming.

Only one system programming session can be performed at a time; that is, only one user can access system programming at a time. This includes PC programming.


Buttons and Functions

Fixed Button (KX-T7730/KX-T7735)	Function
	PREV (PREVIOUS)
	NEXT
	
	
	
	SECRET
	STORE
	PAUSE
	PROGRAM
	END
	SELECT

Fixed Button (KX-T7730/KX-T7735)	Function
FLASH/RECALL ○	FLASH
TRANSFER ○	CLEAR

Entering System Programming Mode

Using a PT to perform system programming allows an authorised administrator to set a wide range of PBX features and parameters. To enter system programming mode, the system password is required. With the system password, all system programming is accessible.

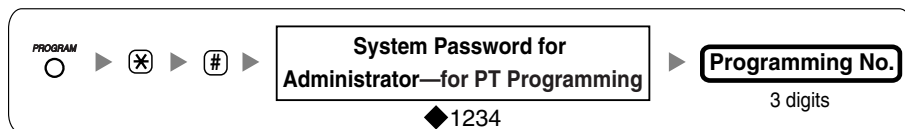

Note


◆ means default value throughout these programming instructions.

Entering Manager Programming Mode

Using a PT to perform manager programming allows the manager extension (extension jack 01) to set certain PBX features and parameters. To enter manager programming mode, the extension password for the manager (manager password) is required.

With the manager password, the following 4 system programming settings are accessible:

- System Speed Dialling Number [001]
- System Speed Dialling Name [011]
- DISA Security Code [512]
- DISA Security Code Digits [530]

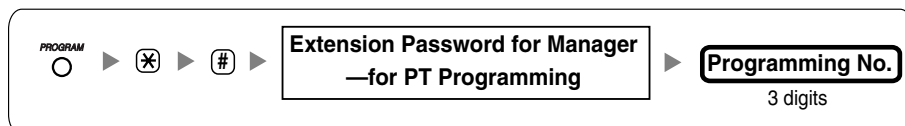

Notes

- The system password may be entered instead of the manager password.
- With the manager password, the manager can also set a password to each extension, and print out call log information for each extension. For more information on how to assign a password to each extension including the manager password and to print out call log information for each extension, refer to the User Manual (→ 2.1.6 Changing System Settings Using Programming Mode, 3.2.2 Printing and Clearing Call Logs).

Entering Characters

The PT's dialling buttons can be used to enter characters when storing a name or message. The following tables depict the available characters:

Table 1 (Alphabet mode)/Table 2 (Numeral mode)

Buttons \ Times	1	2	3	4	5	6	7	8
1	!	?	"					
2	A	B	C	a	b	c		
3	D	E	F	d	e	f		
4	G	H	I	g	h	i		
5	J	K	L	j	k	l		
6	M	N	O	m	n	o		
7	P	Q	R	S	p	q	r	s
8	T	U	V	t	u	v		
9	W	X	Y	Z	w	x	y	z
0	(Space)	.	,	'	:	;		
*	/	+	—	=	<	>		
□	\$	%	&	@	()		

Buttons \ Times	1
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
0	0
*	*
□	□


Table 3 (Cyrillic alphabet mode for RU [Russia]/UA [Ukraine] model)

Buttons \ Times	1	2	3	4	5	6	7	8	9	10
1	А	Б	В	!	?	"				
2	Г	Д	Е	Ё						
3	Ж	З	И	Й						
4	К	Л	М							
5	Н	О	П							
6	Р	С	Т							
7	У	Ф	Х							
8	Ц	Ч	Ш							
9	Щ	Ъ	Ы	Ь						
0	Э	Ю	Я	(Space)	•	,	'	:	;	
*	/	+	-	=	<	>	ı*	€*	ı*	İ*
□	\$	%	&	@	()	€*	ı*	Ÿ*	

* This character is only available for the KX-T7735RU.

[Example of Entering Characters]

To enter "Ann":

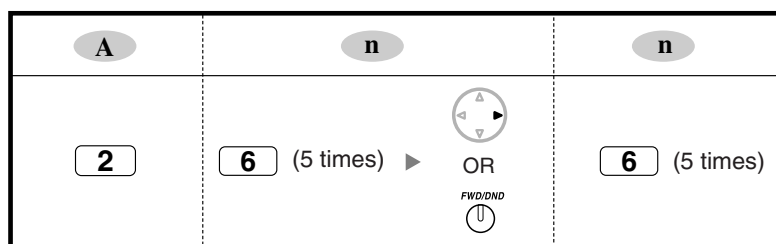

Notes

- To toggle between "Alphabet mode" and "Numeral mode" or between "Alphabet mode", "Cyrillic alphabet mode (assignable only in Extension Name in Cyrillic [616])", and "Numeral mode", press SELECT.
- To move the cursor right, press ►.
- To delete all characters, press CLEAR. To delete a character, press ◀.

List of Abbreviations

A	AA	→	Automated Attendant
	APT	→	Analogue Proprietary Telephone
	ARS	→	Automatic Route Selection
B	BGM	→	Background Music
C	CO	→	Outside (CO) Line
	COS	→	Class of Service
	CPC	→	Calling Party Control
D	DIL	→	Direct In Line
	DISA	→	Direct Inward System Access
	DND	→	Do Not Disturb
	DRD	→	Distinctive Ring Detection
	DSS	→	Direct Station Selection
	DTMF	→	Dual Tone Multi-Frequency
E	EFA	→	External Feature Access
G	GRP	→	Group
I	IRNA	→	Intercept Routing—No Answer
L	LCS	→	Live Call Screening
O	OGM	→	Outgoing Message
P	PT	→	Proprietary Telephone
S	SLT	→	Single Line Telephone
	SMDR	→	Station Message Detail Recording
	SMS	→	Short Message Service
T	TAM	→	Telephone Answering Machine
	TRS	→	Toll Restriction
U	UCD	→	Uniform Call Distribution
V	VM	→	Voice Mail

3.3.2 Programming Procedures

Notes

- ◆ means default value throughout these programming instructions.
- ✱ means to select "All" throughout these programming instructions.
- The following are displayed when you store a number, such as a telephone number, or feature number:
P: PAUSE; -: CONF; F: FLASH/RECALL; []: INTERCOM
x: PAUSE (substitutes for any number [i.e., wild card])
- To return to the previous programming item, press ◀.
- To correct a wrong entry, press CLEAR and then enter the new input.
- To delete a stored parameter, press CLEAR, enter the new input, and then press STORE.
- Press ◀ or ▶ to scroll the display.
- Some programmes cannot have a value left empty.

Date & Time [000]




Notes

- The clock starts immediately after the STORE button is pressed.
- The PBX supports years from 2000 to 2099.

Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)

System Speed Dialling Number [001]

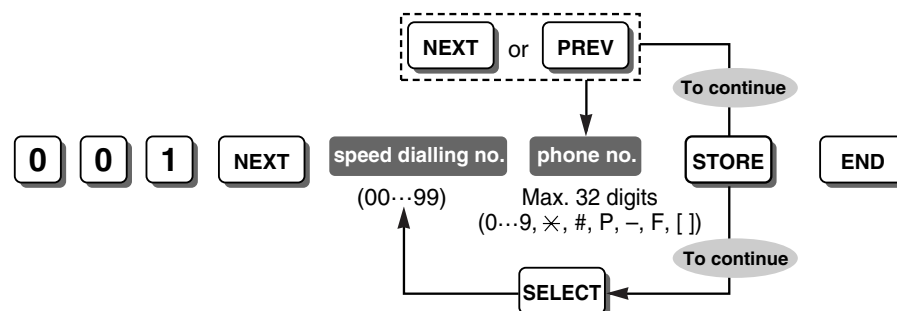

Notes

- An Outside (CO) Line Access number (9/0 [for New Zealand: 1 or 9], 81 through 83) should be included before the phone number. When dialling, a pause will automatically be inserted after the Outside (CO) Line Access number.


3.3 PT Programming

- When storing an account code assigned in Account Code [310], enter × × and the account code after an Outside (CO) Line Access number.

Feature & Programming References

1.6.1 Memory Dialling Features

System Password [002]

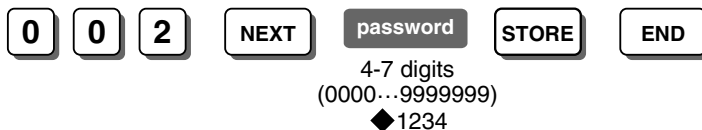

WARNING

To maintain system security, a password is required to perform system programming. To avoid unauthorised access and possible fraudulent dialling, do not disclose the password.

Warning to the Administrator regarding the system password

1. Please inform the customer of the importance of the password and the possible dangers if it becomes known to others.
2. To avoid unauthorised access and possible fraudulent dialling, maintain the secrecy of the password.
3. We strongly recommend that you change the default password value to something else for reasons of system security. It is best to use a password of 7 digits.
4. Please change the password periodically.
5. If a system password is forgotten, it can be found by loading a backup of the system data into a PC, and checking the password using the KX-TEB308 Maintenance Console software. If you do not have a backup of the system data, you must reset the PBX to its factory defaults and reprogramme it. Therefore, we strongly recommend maintaining a backup of the system data. For more information on how to back up the system data, refer to the on-line help that appears by selecting the Help menu during PC programming. However, as system passwords can be extracted from backup copies of the system data file, do not allow unauthorised access to these files.

Note


This PBX has only one system password. It can be changed by either PT programming or PC programming. For this reason, the password can consist of numerals only.

Feature & Programming References

2.3.1 PC Programming

2.3.2 PT Programming

DSS Console Jack Assignment [003]

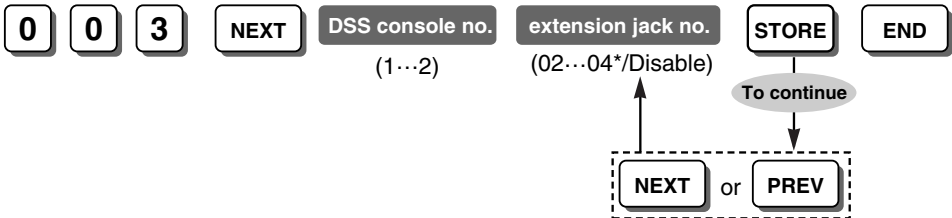

Notes


- * The highest extension jack number may be "08", depending on your country/area.
- To delete (disable) an extension jack number, press CLEAR in the extension jack number step.
- The same jack number cannot be assigned to 2 DSS Consoles.
- Do not assign extension jack 01 (manager extension) as the DSS Console jack.
- The extension jack number preassigned as a paired telephone in Console Paired Telephone [004] should not be assigned in this programme.

Feature & Programming References

1.18.1 Fixed Buttons

2.1.1 Extension Jack Configuration

Console Paired Telephone [004]

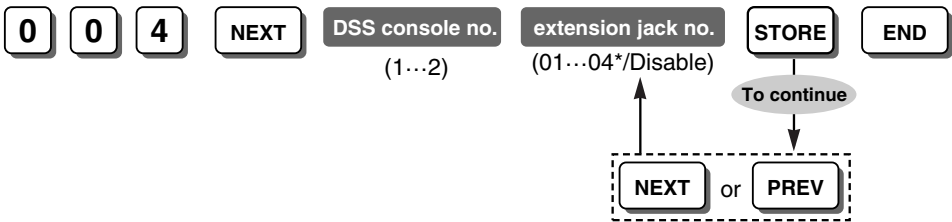

Notes

- * The highest extension jack number may be "08", depending on your country/area.
- To delete (disable) an extension jack number, press CLEAR in the extension jack number step.
- The extension jack number preassigned as a DSS Console in DSS Console Jack Assignment [003] should not be assigned in this programme.
- An SLT cannot be paired with the DSS Console.

Feature & Programming References

1.18.1 Fixed Buttons

2.1.1 Extension Jack Configuration

One-touch Transfer Using a DSS Button [005]



3.3 PT Programming

Note

With Transfer: Press the DSS button to transfer an outside (CO) line call.

Without Transfer: Press the TRANSFER button, then the DSS button to transfer an outside (CO) line call.

Feature & Programming References

1.11.1 Call Transfer

1.18.1 Fixed Buttons

Time Service Switching Mode [006]




Feature & Programming References

2.2.3 Time Service

Time Service Start Time [007]

Time Service Start Time [007]

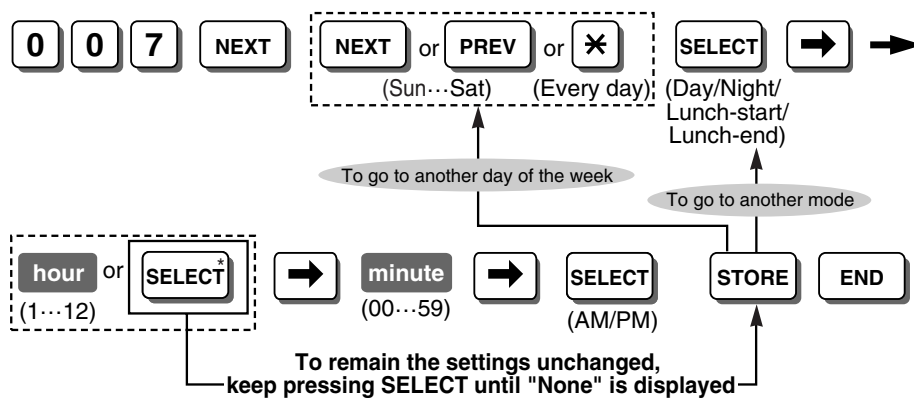


Notes

- This programme is available when switching mode is enabled in automatic mode in Time Service Switching Mode [006].
- * Pressing SELECT shows the previous entry. When the display shows "None", press SELECT to set the start time.

Feature & Programming References

2.2.3 Time Service

Operator Assignment [008]




Note

To delete (disable) an extension jack number, press CLEAR in the extension jack number step.

Feature & Programming References

2.2.4 Operator/Manager Features

Extension Number [009]

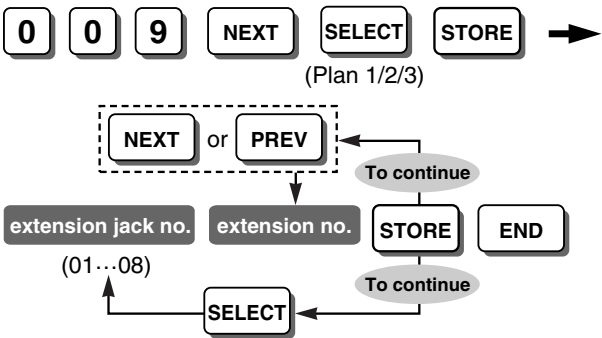

Notes

- Programmable extension numbers are as follows:
Plan 1: 100–199; Plan 2: 100–499; Plan 3: 10–49
(for United Kingdom/New Zealand: Plan 1: 200–299; for New Zealand: Plan 2: 200–499, Plan 3: 20–49)
- The same extension number cannot be entered for 2 different extension jacks.

Feature & Programming References

1.5.1.1 Intercom Call

1.6.1.6 Quick Dialling

1.19.2 Voice Mail Inband (DTMF) Integration

2.3.4 Feature Numbering

LCD Time Display [010]



Note

The following settings and features use 12-hour format even if 24-hour format is assigned in this programme:


Date & Time [000]

Time Service Start Time [007]

1.20.1 Station Message Detail Recording (SMDR)

1.21.2 Timed Reminder

System Speed Dialling Name [011]

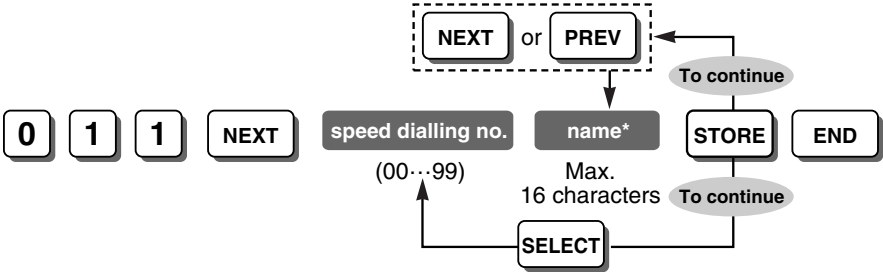


Note

* A name can be stored using a PT's dialling buttons. The displayed character varies depending on the number of times that the dialling button is pressed. It is possible to toggle between "Alphabet mode" and "Numeral mode" by pressing SELECT.

Feature & Programming References

- 1.6.1.5 Speed Dialling—Personal/System
- 3.3.1 Programming Instructions—Entering Characters

Second Feature Numbering Plan [012]

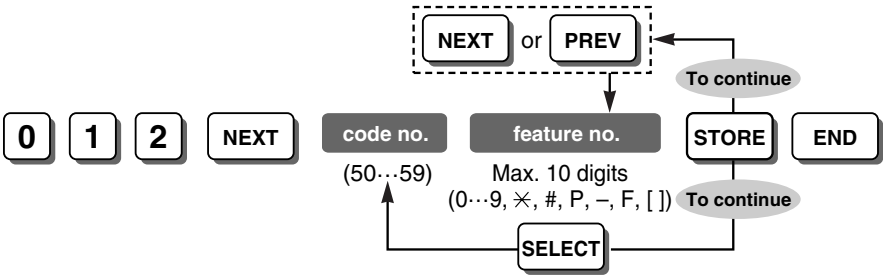


Note

This programme is available only when "Plan 2" or "Plan 3" is selected in Extension Number [009].

Feature & Programming References

- 1.6.1.6 Quick Dialling
- 2.3.4 Feature Numbering

KX-T7710 One-touch Dialling [013]

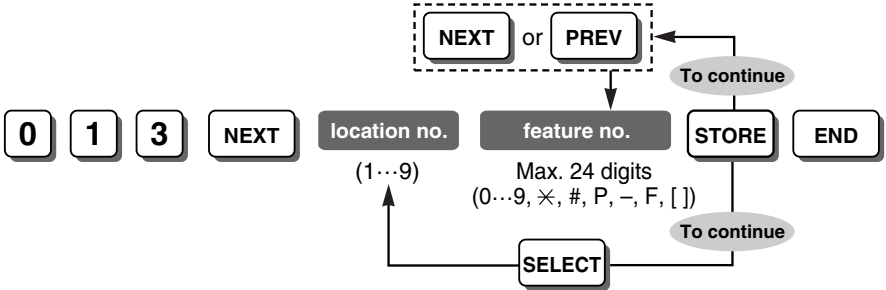


Notes

- Any feature number can be stored in a One-touch button. However, the feature numbers for Personal Speed Dialling, System Speed Dialling, and Quick Dialling do not function.
- This feature is not available when the KX-T7710 is connected in parallel with a PT.

Feature & Programming References

1.6.1.3 KX-T7710 One-touch Dialling


Hunting Group Set [100]

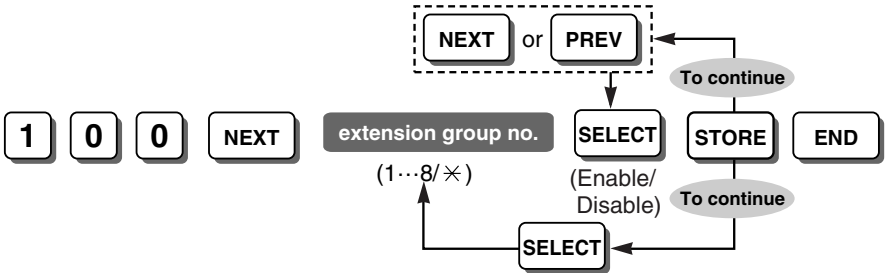

Feature & Programming References

1.2.1 Idle Extension Hunting
Extension Group [600]

Hunting Type [101]

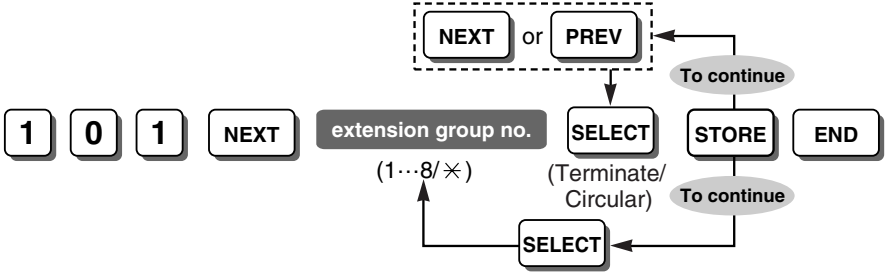

Note


This programme is available when the extension group is enabled in Hunting Group Set [100].

3.3 PT Programming

Feature & Programming References

1.2.1 Idle Extension Hunting


DTMF Integration Port [102]

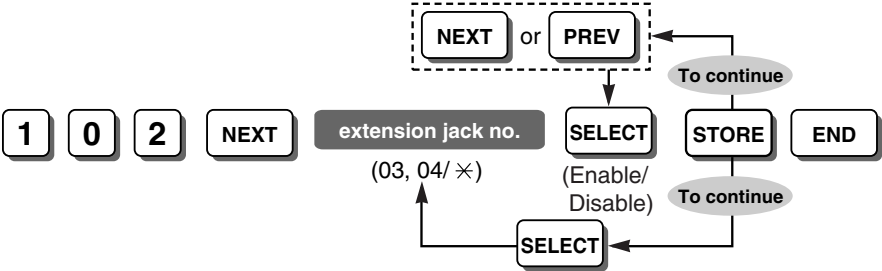

Feature & Programming References

1.19.2 Voice Mail Inband (DTMF) Integration

DTMF Integration [103]



Note


When a KX-TVP series VPS is connected to the PBX, to enable Inband (DTMF) Integration between the VPS and the PBX, select "Plan 1" or "Plan 2" in Extension Number [009] and "Enable" in this programme.

Feature & Programming References

1.19.2 Voice Mail Inband (DTMF) Integration

DTMF Integration Port [102]


SLT Hold Mode [104]



Feature & Programming References

1.12.1 Call Hold

Conference Tone [105]



Feature & Programming References

1.7.2 Executive Busy Override

1.13.1.2 Conference


External Pager Access Tone [106]



Feature & Programming References

1.14.1 Paging

DTMF Receiver Check [107]

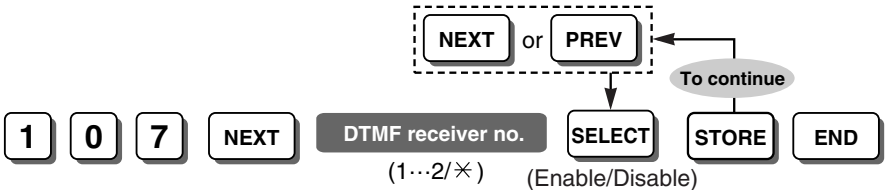


Note

This programme enables each DTMF receiver (1–2: checking extension jacks 01–08) to check whether it is operating normally or not.

Connection References

4.1.3 Operation


Flash/Recall Mode for a Locked Extension [108]



Note

This programme enables a locked extension to send a flash/recall signal during a conversation with an outside party.

CO Indicator [109]



Note

This programme is available for the extension(s) assigned not to ring in Flexible Ringing—Day/Night/Lunch [408-410], to answer incoming outside (CO) line calls.

Flash/Recall Key Mode [110]




3.3 PT Programming

Feature & Programming References

1.10.6 Flash/Recall

1.10.7 External Feature Access (EFA)

Music on Hold [111]

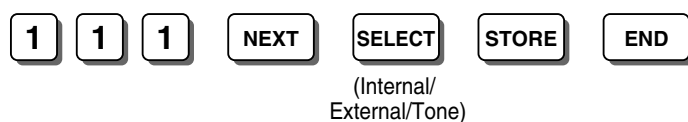

Note


Selections vary depending on your country/area.

Feature & Programming References

1.12.4 Music on Hold

1.15.4 Background Music (BGM)

DSS Lamp Mode [112]



Note


Enable: FWD—Flashing slowly, DND—Flashing at moderate speed

Disable: FWD—Off, DND—Off

Feature & Programming References

1.18.3 LED Indication

Automatic Redial Repeat Count [113]

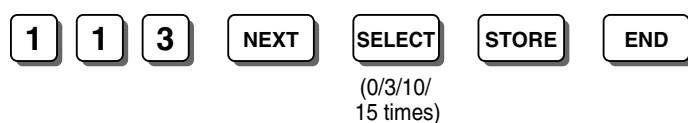

Feature & Programming References

1.6.1.4 Redial


Automatic Redial Interval [114]



Feature & Programming References

1.6.1.4 Redial

Extension Ring Tone Pattern [115]




Feature & Programming References

1.1.3.3 Ring Tone Pattern Selection

1.5.1.1 Intercom Call

4.2.1 Tones/Ring Tones

Conference Pattern [116]

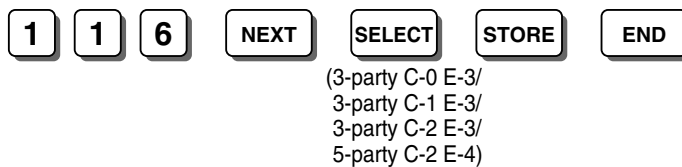

Note

3-party C-0 E-3: No outside parties can attend a 3-party conference call.

3-party C-1 E-3: One outside party can attend a 3-party conference call.

3-party C-2 E-3: A maximum of 2 outside parties can attend a 3-party conference call.


5-party C-2 E-4: A maximum of 2 outside parties can attend a 3-party to 5-party conference call.

The PBX allows up to 2 outside parties to participate in a conference call. [C: CO, E: Extension]

Feature & Programming References

1.13.1.2 Conference


Call Pickup Tone [117]



Feature & Programming References

1.4.1.3 Call Pickup

Pulse Restriction [118]



Note

It is programmable whether pulse dialling is sent or not to the telephone company during a conversation with an outside party when "Pulse" or "Call Block" mode is enabled in Dial Mode [401].

Redialling after Pulse to Tone Conversion [119]

1 **1** **9** **NEXT** **SELECT** **STORE** **END**
(Enable/Disable)

Feature & Programming References

1.5.2.4 Dial Type Selection

Bell Frequency [120]

1 **2** **0** **NEXT** **SELECT** **STORE** **END**
(20/25 Hz)

Note

This programme selects the bell frequency sent to an SLT.

Automatic Line Access [121]

1 **2** **1** **NEXT** **SELECT** **STORE** **END**
(Dial 0/9)*

Note

* For New Zealand: 1 or 9

Feature & Programming References

1.5.3.3 Outside (CO) Line Access

2.2.4 Operator/Manager Features

Automatic Rotation for CO Line Access [122]

1 **2** **2** **NEXT** **SELECT** **STORE** **END**
(Enable/Disable)

Feature & Programming References

1.5.3.3 Outside (CO) Line Access


Break Ratio [123]

1 **2** **3** **NEXT** **SELECT** **STORE** **END**
(MODE1: 66 %/
MODE2: 60 %)

Note

This programme selects the pulse break ratio (the ratio between the length of the pulse and the length of the pause) when a pulse is sent to the telephone company while dialling a telephone number.


TRS Check for * and # [125]



Feature & Programming References

1.8.1 Toll Restriction (TRS)


DSS Off-hook Mode [126]



Feature & Programming References

1.5.1.1 Intercom Call

Pickup Group [127]

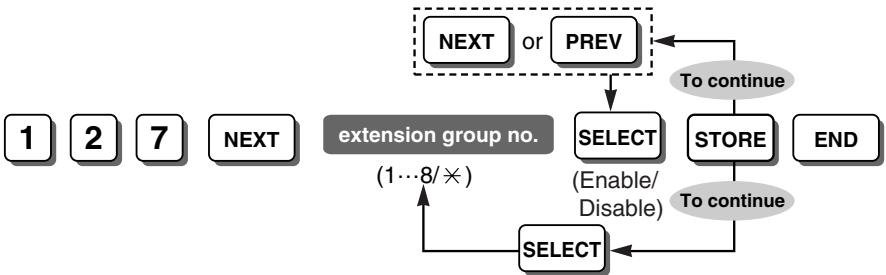


Feature & Programming References

1.4.1.3 Call Pickup

CO Indicator [109]

Ringback Tone Pattern [128]



Note

This programme selects the ringback tone pattern for outgoing intercom calls and for incoming outside (CO) line calls (including a DISA call).

Feature & Programming References

1.5.1.1 Intercom Call

1.15.6 Direct Inward System Access (DISA)

4.2.1 Tones/Ring Tones

VM 1 APT Port [130]



Notes

- To change the current setting (other than "Disable"), select "Disable", then select the desired setting.
- This programme is not available when "Enable" is selected in DTMF Integration [103].

Feature & Programming References

1.19.1 Voice Mail APT Integration

SLT Ring/Silence Ratio [142]



Note


This programme selects the ratio between the bell signals of an SLT (a set of bell-on and bell-off).

Feature & Programming References

1.1.3.3 Ring Tone Pattern Selection

SLT Ring Bell-on Time [143]

SLT Ring Bell-on Time [143]

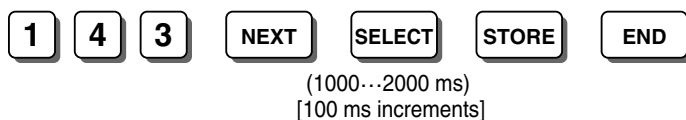

Notes


- This programme selects the length of the bell-on signal of an SLT. This determines the ring tone pattern for incoming calls to SLTs, combined with the setting in SLT Ring/Silence Ratio [142].
- This programme also determines the maximum number of digits of an SLT Caller ID number, when "DTMF1" or "DTMF2" is selected in SLT Caller ID Signalling Type [150].

Feature & Programming References

1.1.3.3 Ring Tone Pattern Selection


1.16.1 Caller ID

SMS Centre Number for Receiving [145]




Feature & Programming References
1.17.3 Fixed Line SMS Terminal Support

SMS Routing Table—CO [146]

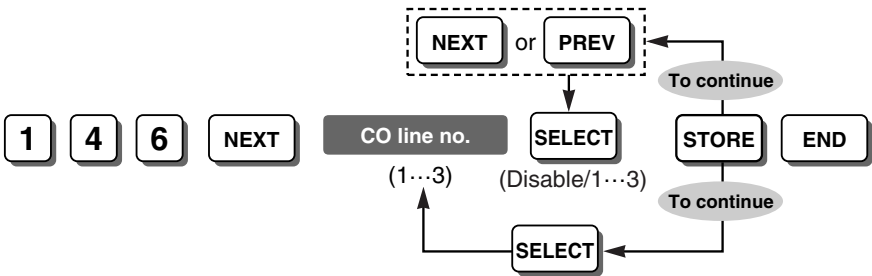

Feature & Programming References
1.17.3 Fixed Line SMS Terminal Support


SMS Routing Table—Extension [147]

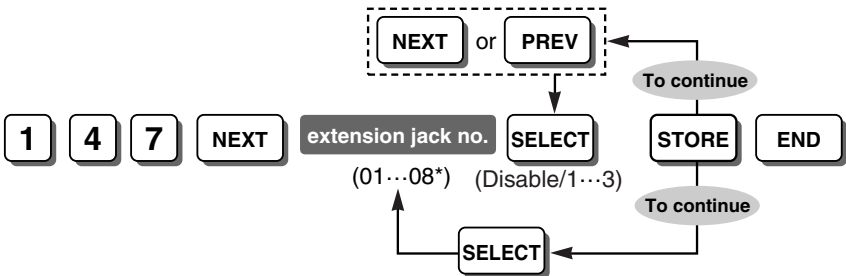

- Notes
- * The highest extension jack number may be "04", depending on your country/area.
 - Each location 1–3 has a maximum of 4 extensions.

Feature & Programming References
1.17.3 Fixed Line SMS Terminal Support

SLT Caller ID Signalling Type [150]

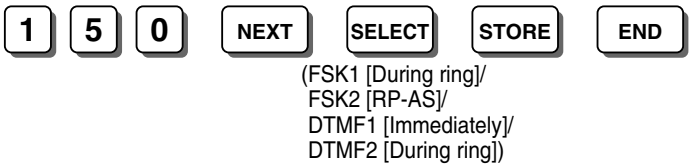

3.3 PT Programming

Feature & Programming References

1.16.1 Caller ID

SLT Caller ID Line Access Number [151]

1 **5** **1** **NEXT** **SELECT** **STORE** **END**
(Enable/Disable)

Feature & Programming References

1.16.1 Caller ID

Automatic Time Adjustment [152]

1 **5** **2** **NEXT** **SELECT** **STORE** **END**
(Enable/Disable)

Feature & Programming References

2.3.3 Automatic Time Adjustment

Incoming Reverse [153]

1 **5** **3** **NEXT** **SELECT** **STORE** **END**
(Enable/Disable)

Feature & Programming References

1.10.10 Calling Party Control (CPC) Signal Detection

Hold Recall Time [200]

2 **0** **0** **NEXT** **SELECT** **STORE** **END**
(30 s/
1/1.5/2/3/4/5/6 min/
Disable)

Feature & Programming References

1.12.1 Call Hold

1.12.2 Call Park

Transfer Recall Time [201]

2 **0** **1** **NEXT** **SELECT** **STORE** **END**
(15/30 s/
1/2 min)

Feature & Programming References

1.11.1 Call Transfer

Call Forwarding Start Time [202]

2 **0** **2** **NEXT** **SELECT** **STORE** **END**
(5/10/15/
20 s delay)

Feature & Programming References

1.3.1.2 Call Forwarding (FWD)

Hot Line Waiting Time [203]

2 **0** **3** **NEXT** **SELECT** **STORE** **END**
(0...4 s)

Feature & Programming References

1.6.1.7 Hot Line

Call Duration Counter Start [204]

2 **0** **4** **NEXT** **SELECT** **STORE** **END**
(5/10/15/20/25/30/35/
40/45/50 s after dialling/
Instantly)

Feature & Programming References

1.5.2.5 Reverse Circuit

1.20.1 Station Message Detail Recording (SMDR)

Polarity Reverse Detection [424]

CO-to-CO Line Call Duration [205]

2 **0** **5** **NEXT** **time** **STORE** **END**
(1...32 min)

Feature & Programming References

1.10.8 Outside (CO) Line Call Limitation

Dialling Start Time [206]

2 **0** **6** **NEXT** **SELECT** **STORE** **END**
Refer to the note.*

Note

* The minimum length of time that the PBX waits after seizing an outside (CO) line before dialling that can be selected depends on your country/area as follows:
For Czech Republic: 0 ms, 250 ms, 500 ms, 750 ms, 1000 ms, 1250 ms, 3500 ms
For Others: 0 ms, 250 ms, 500 ms, 750 ms, 1000 ms, 1250 ms, 1500 ms

3.3 PT Programming

Feature & Programming References

1.5.3.3 Outside (CO) Line Access

Hookswitch Flash Timing Range [207]

2 0 7 NEXT SELECT STORE END

(MODE1: 50-180 ms/
MODE2: 80-180 ms/
MODE3: 80-650 ms/
MODE4: 80-1000 ms/
MODE5: 200-1000 ms)

Feature & Programming References

1.12.1 Call Hold

Inter-digit Time [208]

2 0 8 NEXT SELECT STORE END

(5/10/15/20 s)

Feature & Programming References

1.8.1 Toll Restriction (TRS)

No Dial Disconnection [211]

DTMF Time [210]

2 1 0 NEXT SELECT STORE END

(MODE1: 80 ms/
MODE2: 160 ms)

Note

This programme selects the minimum duration of the DTMF signal sent to outside (CO) lines that have been set to "DTMF" in Dial Mode [401].

Feature & Programming References

1.5.2.4 Dial Type Selection

No Dial Disconnection [211]

2 1 1 NEXT SELECT STORE END

(Enable/Disable)

Feature & Programming References

1.8.1 Toll Restriction (TRS)

Inter-digit Time [208]

Extension-to-CO Line Call Duration [212]



Note

This programme is available for the extension(s) enabled in CO Line Call Duration Limitation [613].

Feature & Programming References

1.10.8 Outside (CO) Line Call Limitation


Bell-off Detection [213]



Note

This programme selects the minimum time required by the PBX to confirm that the bell signal is no longer being sent from the telephone company, before the PBX acknowledges that the call is lost.

Carrier Exception Code [300]

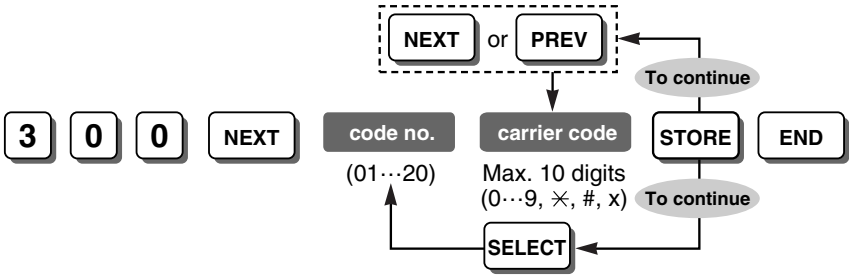

Feature & Programming References

1.8.1 Toll Restriction (TRS)

1.9.1 Automatic Route Selection (ARS)

TRS—System Speed Dialling Class [301]




Feature & Programming References

1.6.1.5 Speed Dialling—Personal/System


1.8.1 Toll Restriction (TRS)

TRS—COS 2-5 Denied Code [302-305]

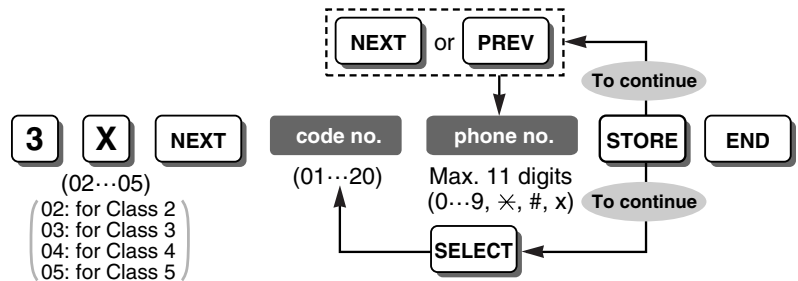


Feature & Programming References
1.8.1 Toll Restriction (TRS)

TRS—Exception Code [306]

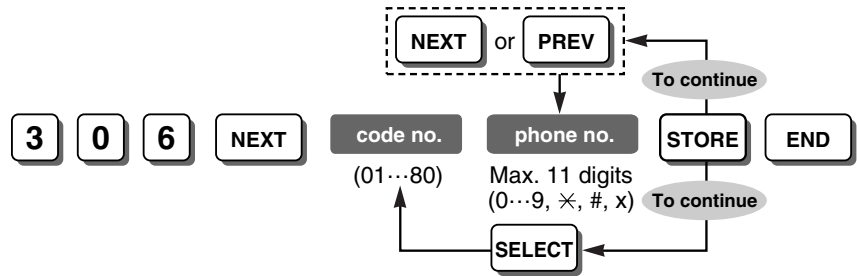


Feature & Programming References
1.8.1 Toll Restriction (TRS)
TRS—COS 2-5 Denied Code [302-305]

Emergency Number [309]

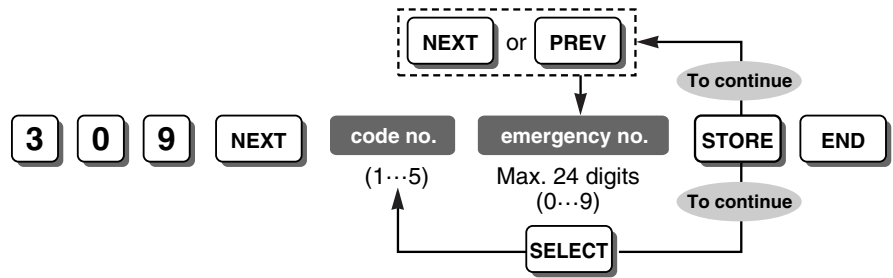

Feature & Programming References
1.5.2.2 Emergency Call
1.8.1 Toll Restriction (TRS)


Account Code [310]

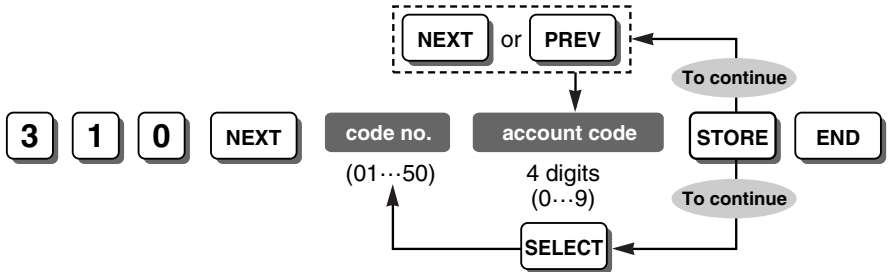

Feature & Programming References

- 1.5.2.3 Account Code Entry
- 1.8.2 Toll Restriction (TRS) Override by Account Code
- Account Code Mode [605]

Automatic Pause Insertion Code [311]

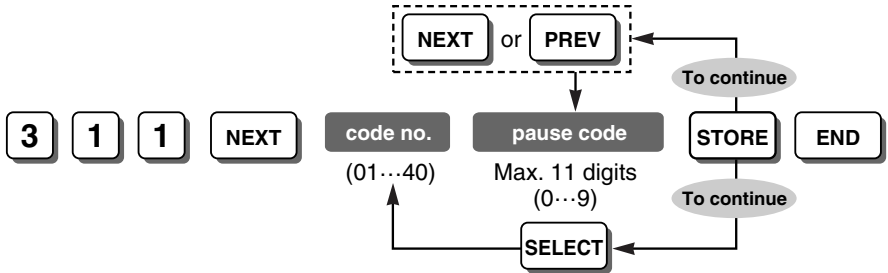

Feature & Programming References

- 1.5.2.6 Pause Insertion
- Pause Time [417]


TRS—Extension Lock Class [312]



Feature & Programming References


- 1.8.1 Toll Restriction (TRS)
- 1.8.3 Extension Lock

ARS Selection [350]

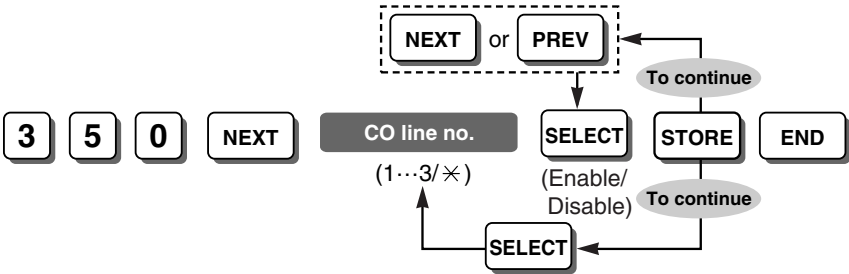


Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

Route 1-4 Selection Code [351-354]

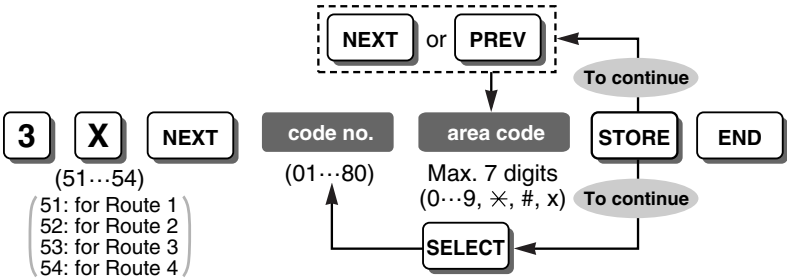


Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

Route 1-4 Exception Code [355-358]

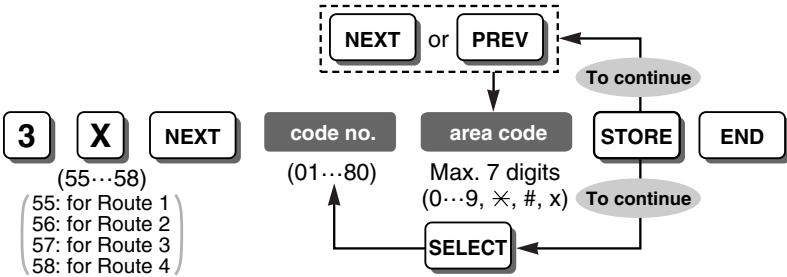


Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

1st Carrier Selection Code [359]




Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

ARS Modification—Removed Digits [360]

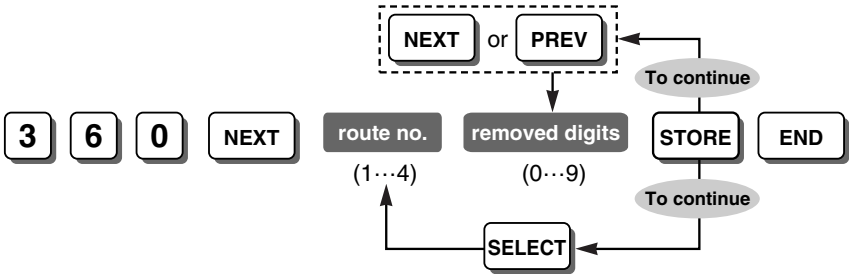


Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

ARS Modification—Added Number [361]

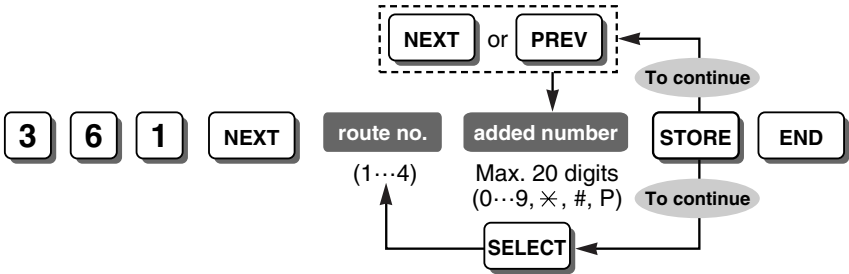

Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

ARS Dial Tone [362]



Feature & Programming References
1.22.1 Dial Tone


ARS Inter-digit Time [363]



Note
This assignment should be the same as the inter-digit timer assigned in Inter-digit Time [208].

Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

ARS CO Line Group [364]

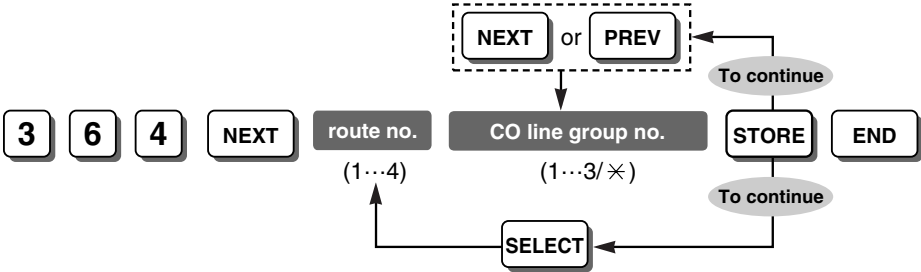


Note

The assignments in Route 1-4 Selection Code [351-354] are effective for this programme.

Feature & Programming References

1.9.1 Automatic Route Selection (ARS)


Route 1-4 Authorisation Code [381-384]

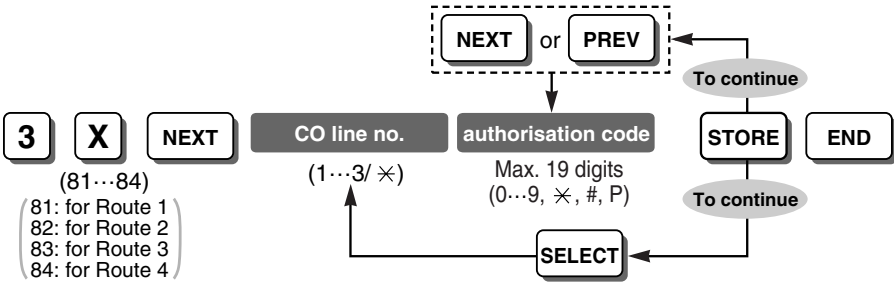

Feature & Programming References

1.9.1 Automatic Route Selection (ARS)


Route 1-4 Itemised Billing [385-388]

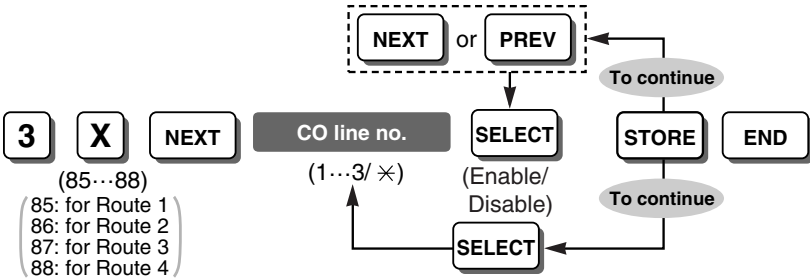

Feature & Programming References


1.9.1 Automatic Route Selection (ARS)

Itemised Billing Code [389]

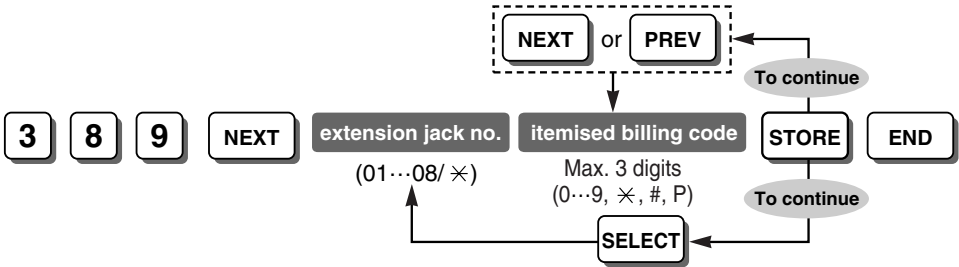

Feature & Programming References
1.9.1 Automatic Route Selection (ARS)


Authorisation and Itemised Billing Code Order [390]

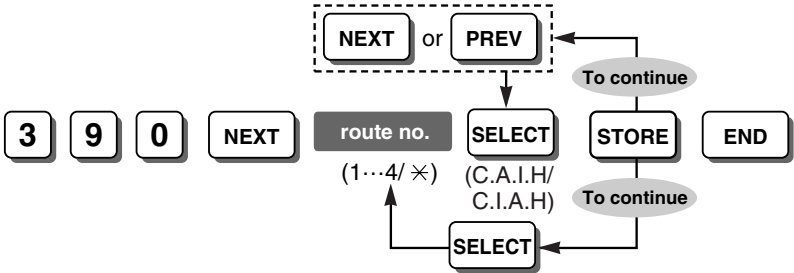

Note
C: Carrier Access Code; A: Authorisation Code; I: Itemised Billing Code; H: Telephone Number

Feature & Programming References
1.9.1 Automatic Route Selection (ARS)

CO Line Connection [400]

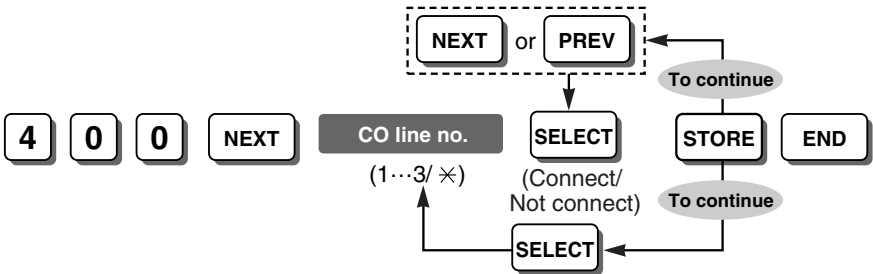


Note
The numbers of outside (CO) line ports that do not have lines connected should be set to "Not connect". The PBX seizes the highest available outside (CO) line number when selecting an idle outside (CO) line automatically. If an unconnected outside (CO) line number is set to "Connect" and is numbered higher than any connected outside (CO) line number, the PBX will try to seize the unconnected outside (CO) line.

Feature & Programming References

1.5.3.2 Line Preference—Outgoing

1.5.3.3 Outside (CO) Line Access


Dial Mode [401]

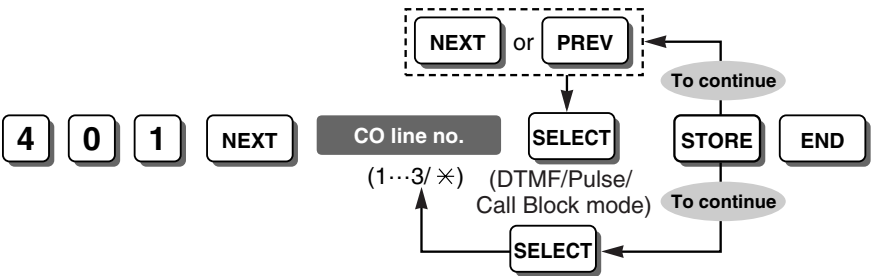

Feature & Programming References

1.5.2.4 Dial Type Selection

Pulse Speed [402]

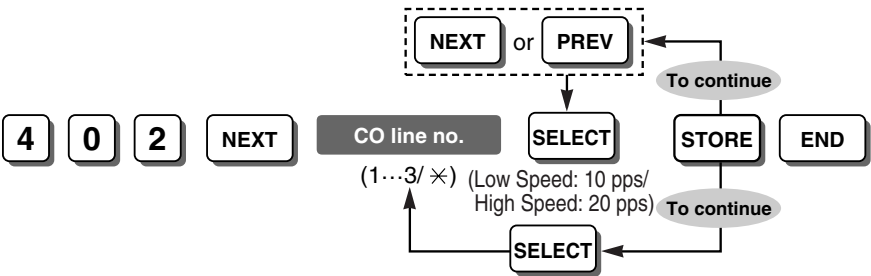


Feature & Programming References

1.5.2.4 Dial Type Selection

Dial Mode [401]

Host PBX Access Code [403]

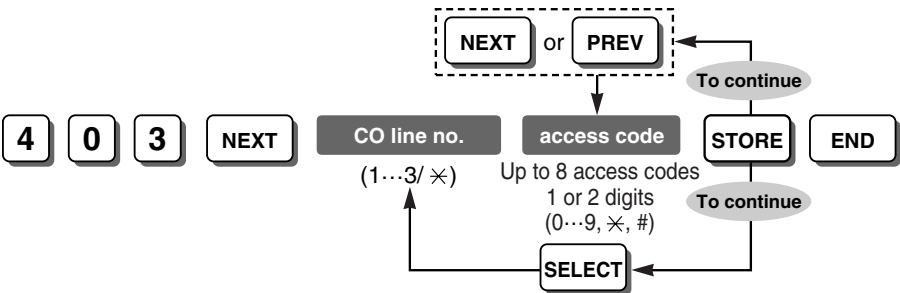


Note

Insert ", " (CONF/MESSAGE button) between each access code using the comma button on the overlay. For example, to store access codes 81 and 82 on outside (CO) line 1, programme as follows:
403 NEXT 1 81,82 STORE END

Feature & Programming References

1.5.2.7 Host PBX Access Code (Access Code to the Telephone Company from a Host PBX)
Pause Time [417]


CO Line Group Number [404]

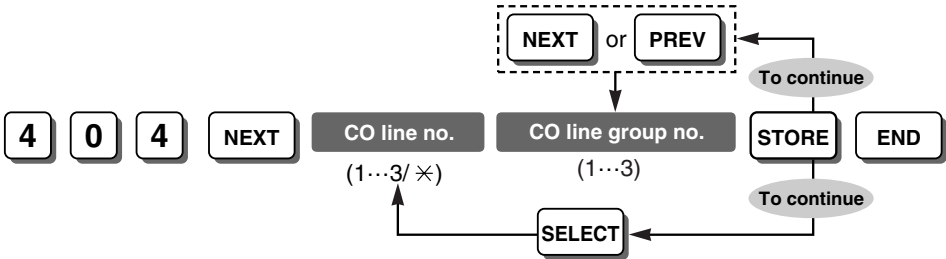

Feature & Programming References

1.5.3.3 Outside (CO) Line Access
2.2.2 Group

Flexible Outward Dialling—Day/Night/Lunch [405-407]

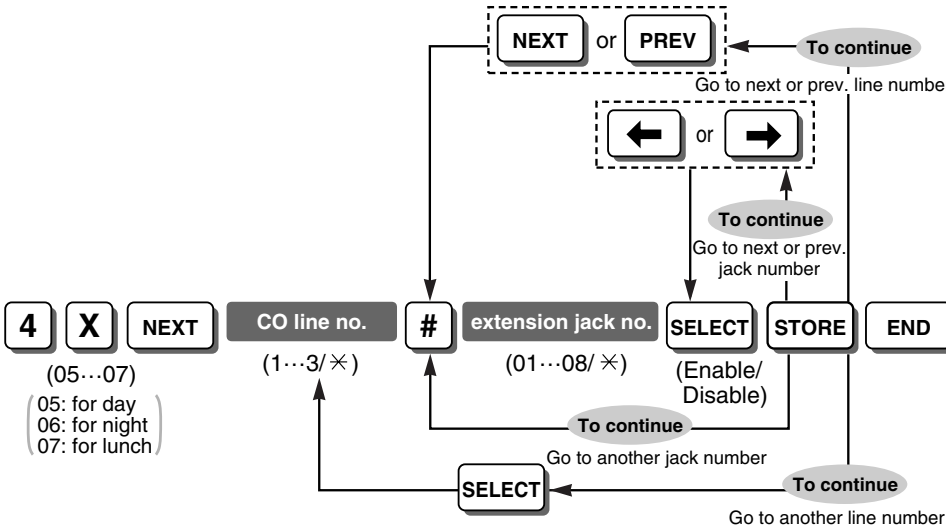


Note

It is impossible to disable all extensions for all outside (CO) lines in each time service mode (day/night/ lunch). In each mode, at least one extension must be allowed to make an outside (CO) line call.

Feature & Programming References


1.5.3.2 Line Preference—Outgoing
1.5.3.3 Outside (CO) Line Access

Flexible Ringing—Day/Night/Lunch [408-410]

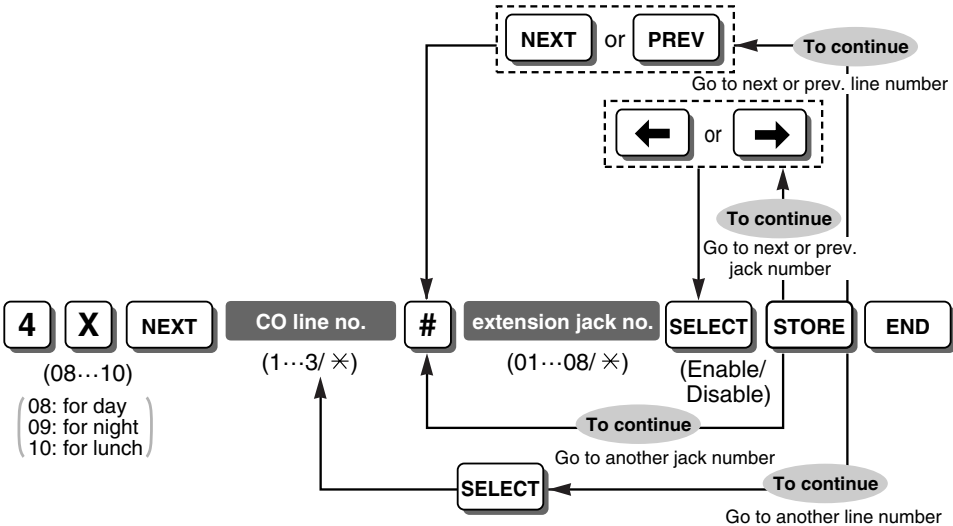

Feature & Programming References
1.1.3.2 Outside (CO) Line Ringing Selection
1.4.1.2 Line Preference—Incoming

Delayed Ringing—Day/Night/Lunch [411-413]

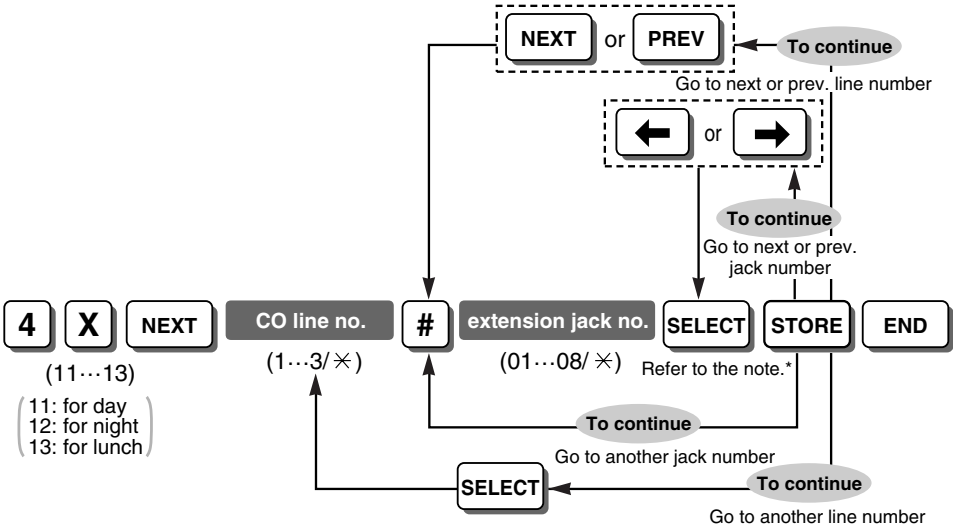


Note
* The ringing start time that can be selected for extension(s) selected in Flexible Ringing—Day/Night/Lunch [408-410] depends on your country/area as follows:
For United Kingdom: Immediately, 10 s, 20 s, 30 s
For Others: Immediately, 5 s, 10 s, 15 s

Feature & Programming References


- 1.2.3 Direct Inward System Access (DISA) Ring
- 1.4.1.2 Line Preference—Incoming

CO Line Mode—Day/Night/Lunch [414-416]


<To select Normal, UCD, and/or MODEM>

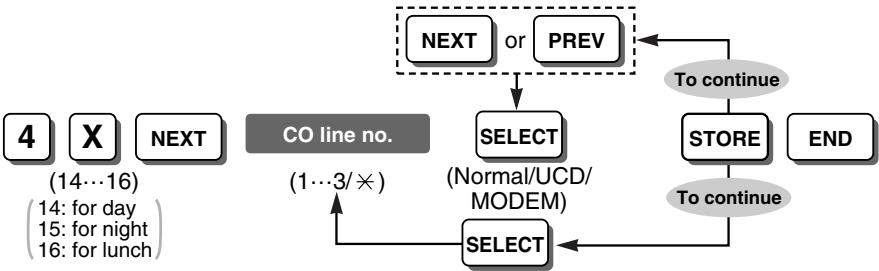

<To select DISA>

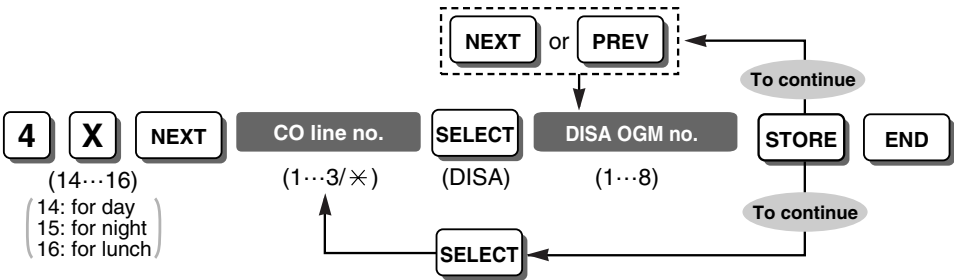

<To select DIL>

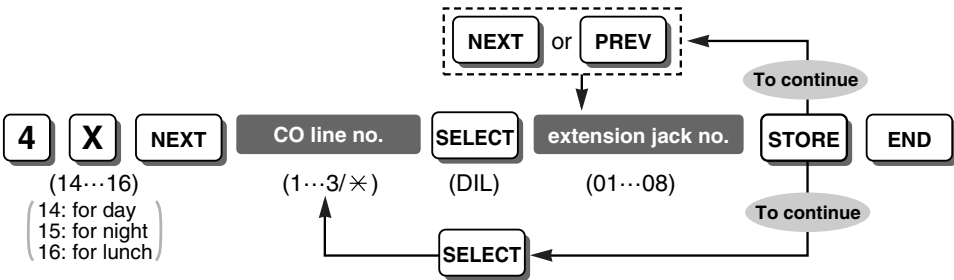


Note

When you select "UCD", it is necessary to assign an extension group as the UCD group in UCD Group [520].

Feature & Programming References

- 1.1.1.1 Direct In Line (DIL)
- 1.2.2 Uniform Call Distribution (UCD)
- 1.15.6 Direct Inward System Access (DISA)
- 2.3.1 PC Programming
- Flexible Ringing—Day/Night/Lunch [408-410]

Pause Time [417]

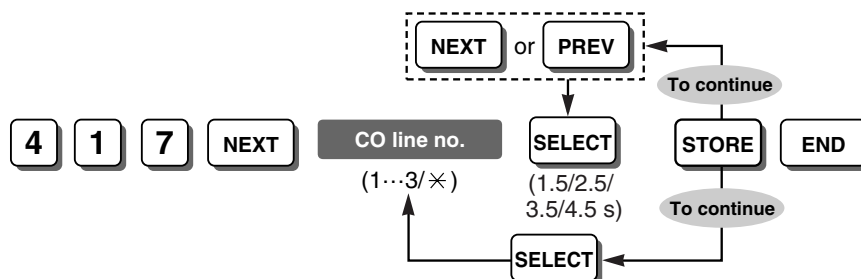

Feature & Programming References


1.5.2.6 Pause Insertion

1.5.2.7 Host PBX Access Code (Access Code to the Telephone Company from a Host PBX)

Automatic Pause Insertion Code [311]

Host PBX Access Code [403]

Flash/Recall Time [418]

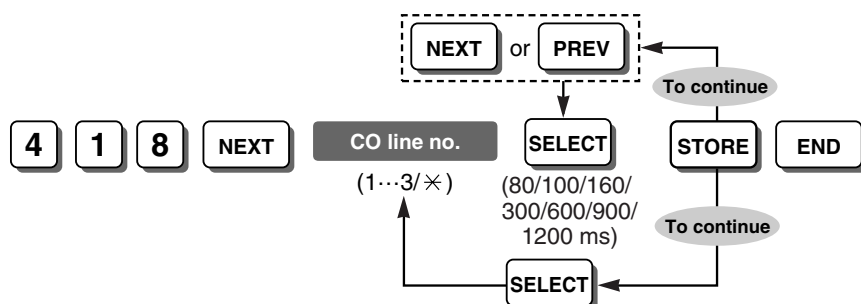


Feature & Programming References

1.10.6 Flash/Recall

1.10.7 External Feature Access (EFA)

Automatic Designated Line Access [419]

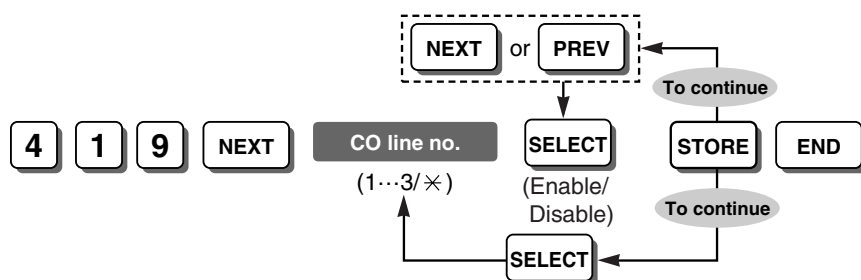


Feature & Programming References

1.5.3.2 Line Preference—Outgoing

1.5.3.3 Outside (CO) Line Access

Automatic Line Access [121]

CPC Signal Detection—Incoming [420]

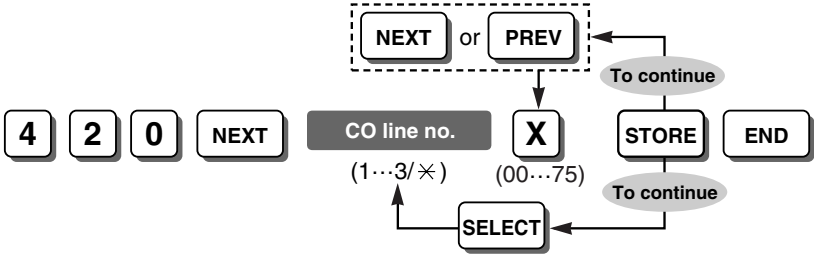


Note

CPC signal detect time selection number:
00: Disable; 01–75: 22–614 ms (detect time: 8 ms increments)

Feature & Programming References

1.10.10 Calling Party Control (CPC) Signal Detection

CPC Signal Detection—Outgoing [421]

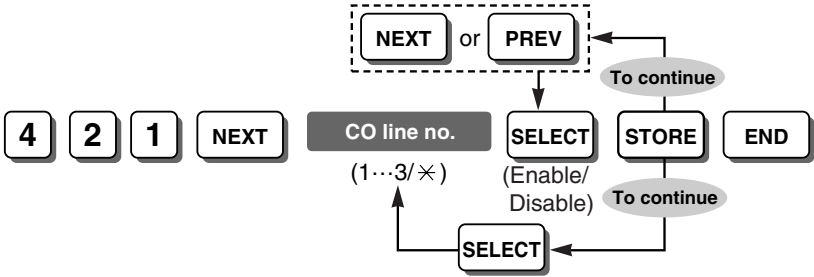


Note

When this programme is disabled, CPC Signal Detection is only activated during an incoming outside (CO) line call.

Feature & Programming References

1.10.10 Calling Party Control (CPC) Signal Detection

Disconnect Time [422]

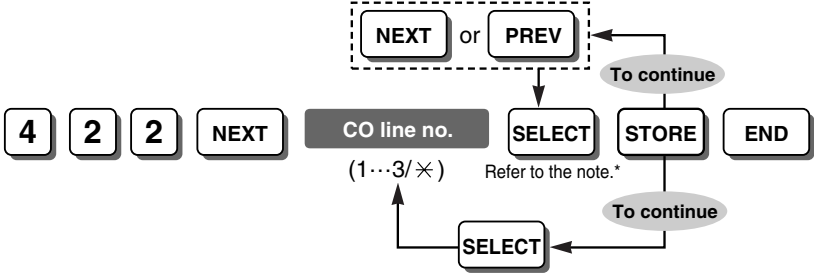

3.3 PT Programming


Notes

- * The disconnect signal lengths that can be selected depend on your country/area as follows:
For United Kingdom: 0.5 s, 2.0 s, 4.0 s
For South Africa: 0.8 s, 1.5 s, 4.0 s
For Others: 0.5 s, 1.5 s, 4.0 s
- The time you select must be longer than the requirements of your telephone company or host PBX.

Feature & Programming References

1.10.6 Flash/Recall

CO Line Ring Tone Pattern [423]

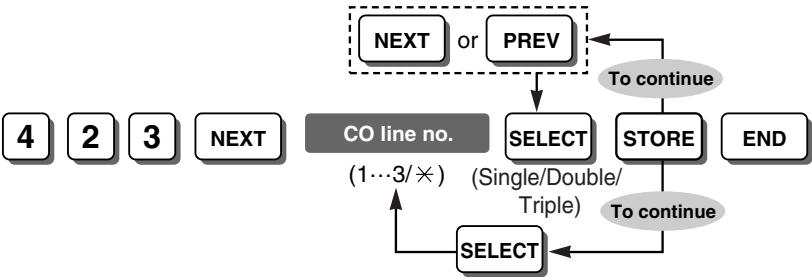


Note

It is recommended that you set a different ring tone pattern from the ring tone patterns specified in Extension Ring Tone Pattern [115] and Doorphone Ring Tone Pattern [706].

Feature & Programming References

1.1.3.3 Ring Tone Pattern Selection


Polarity Reverse Detection [424]

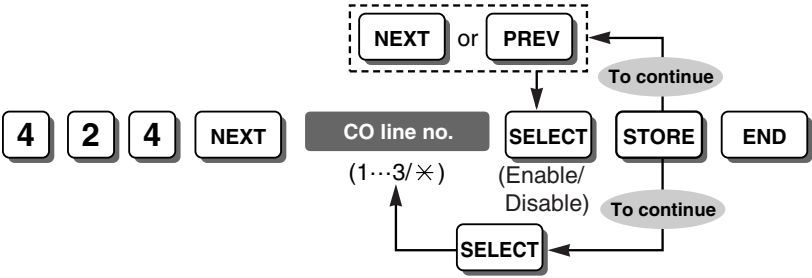

Feature & Programming References

1.5.2.5 Reverse Circuit


Collect Call Block [425] (Brazil only)

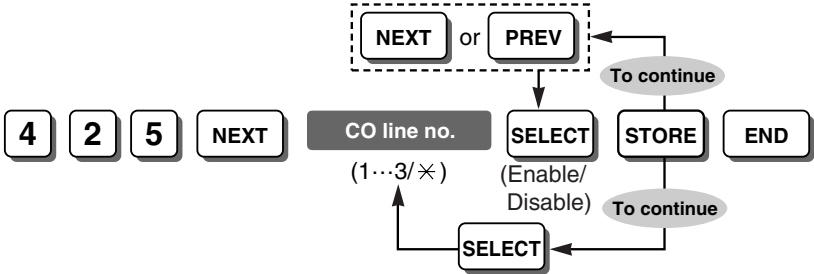

Note

This programme enables the PBX to automatically reject collect calls from the telephone company.

Distinctive Ring Detection (DRD) [426] (New Zealand only)

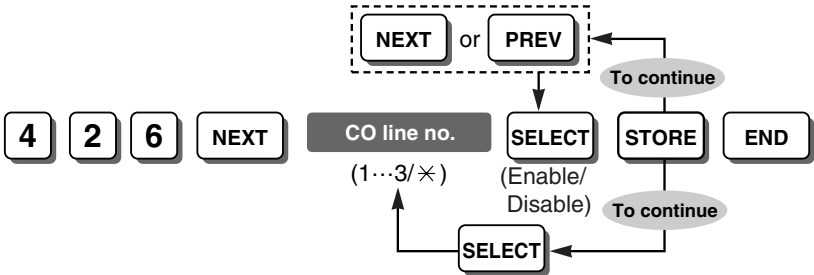


Feature & Programming References

1.1.3.4 Distinctive Ring Detection (DRD) for New Zealand

DRD Ring Pattern 2 Extension Assignment—Day/Night/Lunch [427-429] (New Zealand only)

DRD Ring Pattern 3 Extension Assignment—Day/Night/Lunch [430-432] (New Zealand only)


**DRD Ring Pattern 2 Extension Assignment—Day/Night/Lunch [427-429]
(New Zealand only)**

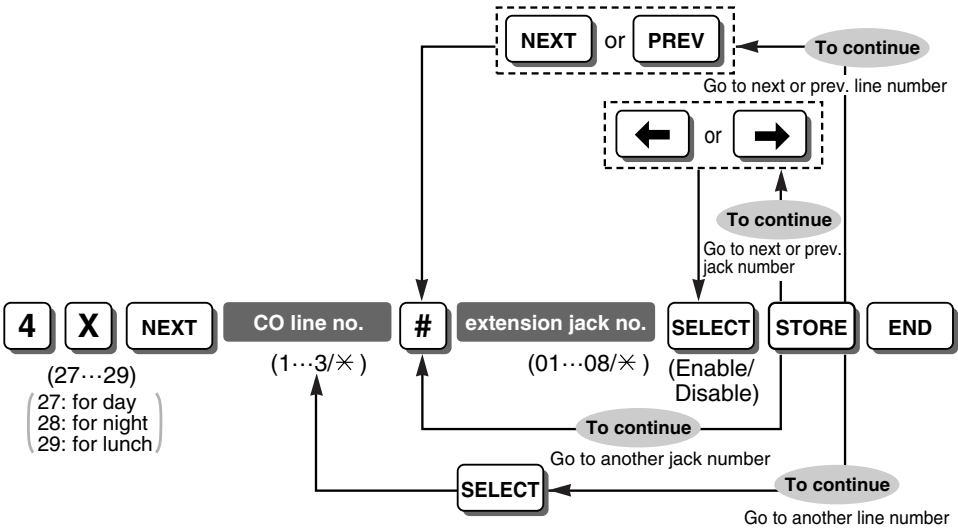

Note
This is effective only when the DRD feature is enabled in Distinctive Ring Detection (DRD) [426] (New Zealand only).

Feature & Programming References
1.1.3.4 Distinctive Ring Detection (DRD) for New Zealand

**DRD Ring Pattern 3 Extension Assignment—Day/Night/Lunch [430-432]
(New Zealand only)**

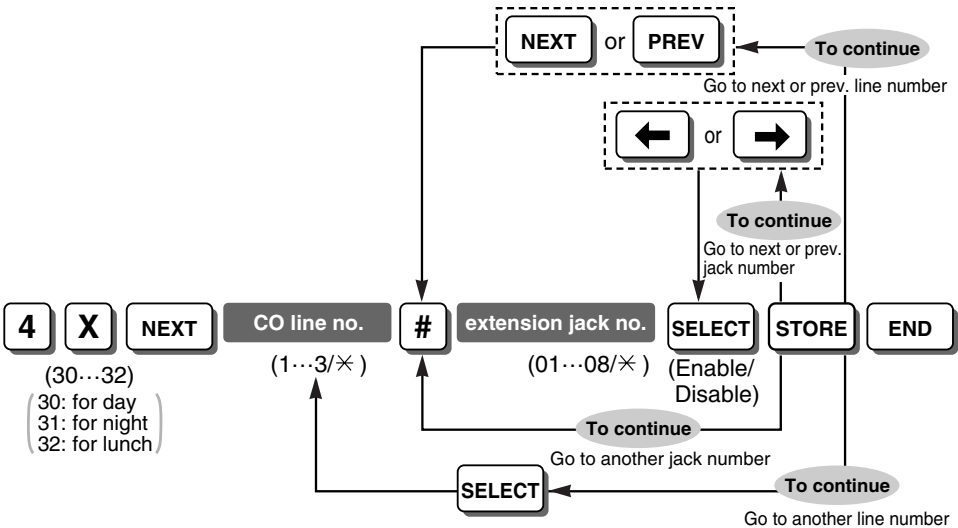


Note

This is effective only when the DRD feature is enabled in Distinctive Ring Detection (DRD) [426] (New Zealand only).

Feature & Programming References

1.1.3.4 Distinctive Ring Detection (DRD) for New Zealand


DRD Pattern 2 and 3 Ring Tone [433-434] (New Zealand only)

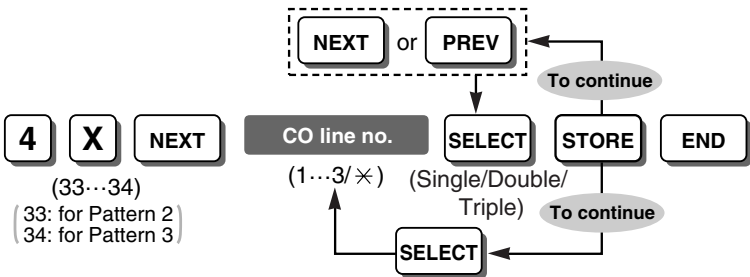

Feature & Programming References

1.1.3.4 Distinctive Ring Detection (DRD) for New Zealand

DISA Incoming Call Dial Mode [500]




Note

Without AA: Available destinations are extension numbers assigned in Extension Number [009], Outside (CO) Line Access numbers (9/0 [for New Zealand: 1 or 9], 81 through 83), and the Operator Call number (0 or 9)
With AA: Available destinations are numbers available in "Without AA" mode and numbers (0 through 9) assigned in DISA Built-in AA [501]

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

DISA Built-in AA [501]

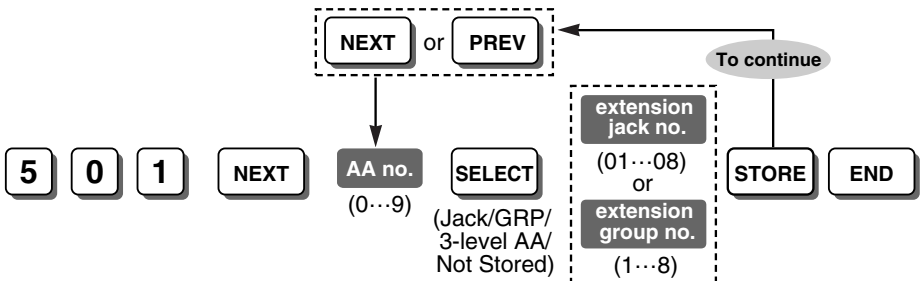

3.3 PT Programming

Note

If you would like to use the Automatic Line Access number (9/0 [for New Zealand: 1 or 9]) and/or Operator Call number in AA mode, do not assign AA number(s) that correspond to Automatic Line Access or Operator Call numbers (9 and/or 0).

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

FAX Connection [503]

5 **0** **3** **NEXT** **extension jack no.** **STORE** **END**
(01...08*/Disable)

Notes

- * The highest extension jack number may be "04", depending on your country/area.
- To delete (disable) an extension jack number, press CLEAR in the extension jack number step.
- The assigned extension will automatically have the Data Line Security feature set.

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

DISA Delayed Answer Time [504]

5 **0** **4** **NEXT** **SELECT** **STORE** **END**
(0/3/6/12 s)

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

DISA Wait Time after OGM [505]

5 **0** **5** **NEXT** **SELECT** **STORE** **END**
(0/5/10/15 s)

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

DISA Busy Mode [506]

<To select Disconnect or Call Waiting>


5 **0** **6** **NEXT** **SELECT** **STORE** **END**
(Disconnect/
Call Waiting)

<To select DISA>


5 **0** **6** **NEXT** **SELECT** **DISA OGM no.** **STORE** **END**
(DISA) (1...8)

Feature & Programming References


- 1.15.5 Outgoing Message (OGM) for DISA/UCD
- 1.15.6 Direct Inward System Access (DISA)

DISA Intercept Mode [507]**Feature & Programming References**


- 1.1.1.2 Intercept Routing
- 1.15.6 Direct Inward System Access (DISA)
- 1.19 Voice Mail Features

DISA Ring Time before Intercept [508]**Feature & Programming References**

- 1.1.1.2 Intercept Routing
- 1.15.6 Direct Inward System Access (DISA)
- DISA Intercept Mode [507]

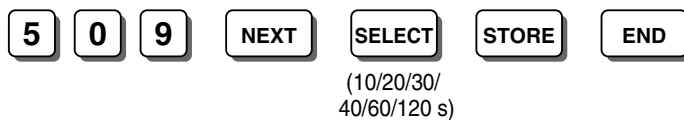DISA Ring Time after Intercept [509]**Feature & Programming References**

- 1.1.1.2 Intercept Routing
- 1.15.6 Direct Inward System Access (DISA)
- DISA Intercept Mode [507]
- DISA Ring Time before Intercept [508]

DISA No Dial Mode [510]**Feature & Programming References**

- 1.15.6 Direct Inward System Access (DISA)

DISA Security Mode [511]



Note

Trunk Security: Requires the caller to enter a DISA security code assigned in DISA Security Code [512] before making an outside (CO) line call.


All Security: Requires the caller to enter a DISA security code before making either an outside (CO) line or intercom call.

No Security: Allows the caller to make either an outside (CO) line or intercom call without entering a DISA security code.

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

DISA Security Code [512]

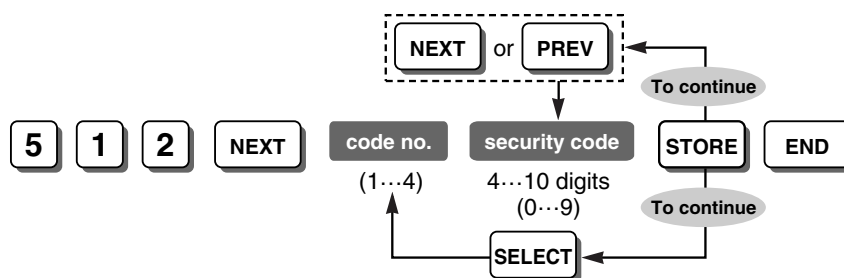

WARNING

There is a risk that fraudulent telephone calls will be made using the Outside-to-Outside (CO-to-CO) Line Call feature of DISA.

The cost of such calls will be billed to the owner/renter of the PBX.

To protect the PBX from this kind of fraudulent use, we strongly recommend:

- Enabling DISA security (Trunk Security or All Security).
- Maintaining the secrecy of passwords.
- Selecting passwords that are complex and random, so that they cannot be easily guessed.
- Changing passwords regularly.

Notes

- This setting is required if "Trunk Security" or "All Security" is selected in DISA Security Mode [511].
- Each DISA security code should be unique.
- The number of digits for DISA security codes is selected in DISA Security Code Digits [530].

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

DISA Security Mode [511]

Cyclic Tone Detection [513]



Feature & Programming References
 1.15.6 Direct Inward System Access (DISA)

FAX Tone Detection [514]




Feature & Programming References
 1.15.6 Direct Inward System Access (DISA)
 FAX Connection [503]

Intercept Time for Internal DISA [515]



Feature & Programming References
 1.15.6 Direct Inward System Access (DISA)
 DISA No Dial Mode [510]

DISA Incoming Assignment [516]

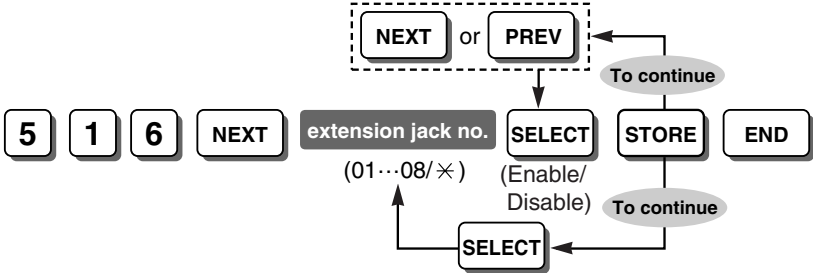

Feature & Programming References
 1.15.6 Direct Inward System Access (DISA)

DISA AA Wait Time [517]



Feature & Programming References
 1.15.6 Direct Inward System Access (DISA)
 DISA Built-in AA [501]

DISA Tone after Security Code [518]

5 **1** **8** **NEXT** **SELECT** **STORE** **END**
(Enable/Disable)

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)
DISA Security Code [512]

OGM Mute Time [519]

5 **1** **9** **NEXT** **SELECT** **STORE** **END**
(0/2/4/6 s)

Feature & Programming References

1.15.6 Direct Inward System Access (DISA)

UCD Group [520]

5 **2** **0** **NEXT** **extension group no.** **STORE** **END**
(1...8)

Feature & Programming References

1.2.2 Uniform Call Distribution (UCD)
2.2.2 Group

UCD Busy Waiting Time [521]

5 **2** **1** **NEXT** **waiting time** **SELECT** **STORE** **END**
(1...32 min/1...59 s) (min/s)

Feature & Programming References

1.2.2 Uniform Call Distribution (UCD)
UCD Busy Mode [523]

UCD OGM Message Interval Time [522]


5 **2** **2** **NEXT** **SELECT** **STORE** **END**
(30 s/
1/1.5/2 min)

Feature & Programming References


1.2.2 Uniform Call Distribution (UCD)
UCD Busy Waiting Time [521]

UCD Busy Mode [523]


<To select Intercept-Normal or Disconnect>




<To select Intercept-DISA or Disconnect-OGM>

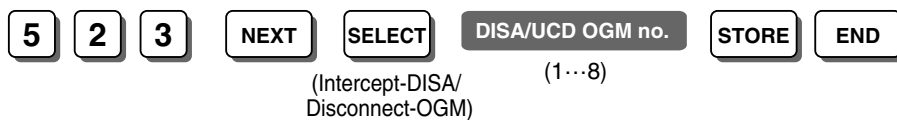**Feature & Programming References**

1.2.2 Uniform Call Distribution (UCD)


UCD Intercept Mode [524]**Feature & Programming References**

1.2.2 Uniform Call Distribution (UCD)

UCD Ring Time before Intercept [525]**Feature & Programming References**

1.2.2 Uniform Call Distribution (UCD)

UCD Intercept Mode [524]

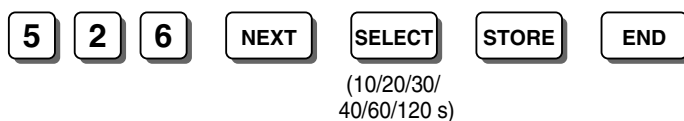UCD Ring Time after Intercept [526]**Feature & Programming References**

1.2.2 Uniform Call Distribution (UCD)

UCD Intercept Mode [524]

UCD Waiting Message [527]

3.3 PT Programming

Feature & Programming References

- 1.2.2 Uniform Call Distribution (UCD)
- 1.15.5 Outgoing Message (OGM) for DISA/UCD

DISA Security Code Digits [530]



Note

When this setting is changed, DISA security codes that have already been assigned in DISA Security Code [512] will be cleared.

Feature & Programming References

- 1.15.6 Direct Inward System Access (DISA)


DISA Ringback Tone [531]



Feature & Programming References

- 1.15.6 Direct Inward System Access (DISA)

3-level AA Assignment [540-549]

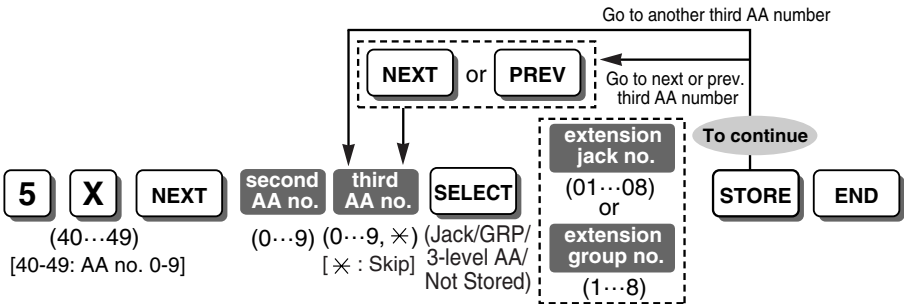

Notes

- This programme is available only when "3-level AA" is selected for each AA number in DISA Built-in AA [501].
- Only when you select "×" as the third AA number, you can select "3-level AA" in the next step.

Feature & Programming References


- 1.15.6 Direct Inward System Access (DISA)

Clear All OGMs of DISA/UCD [599]

5 9 9 NEXT STORE END


Feature & Programming References
1.15.5 Outgoing Message (OGM) for DISA/UCD

Extension Group [600]

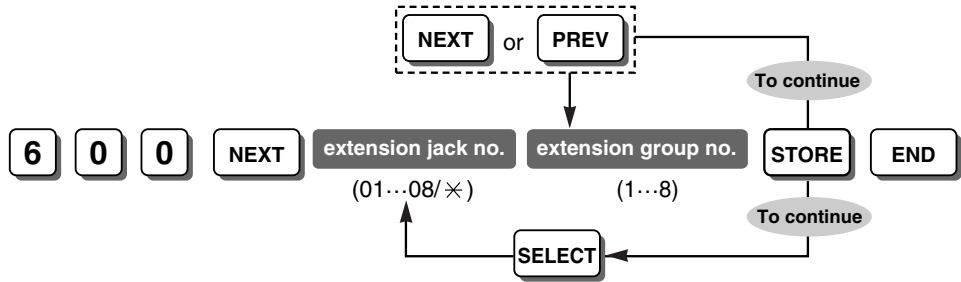


Feature & Programming References
1.2.1 Idle Extension Hunting
2.2.2 Group

TRS-COS—Day/Night/Lunch [601-603]

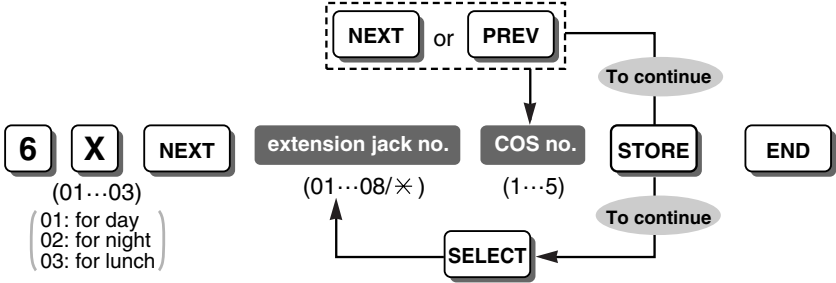

Feature & Programming References
1.8.1 Toll Restriction (TRS)
2.2.1 Class of Service (COS)

Extension Name [604]

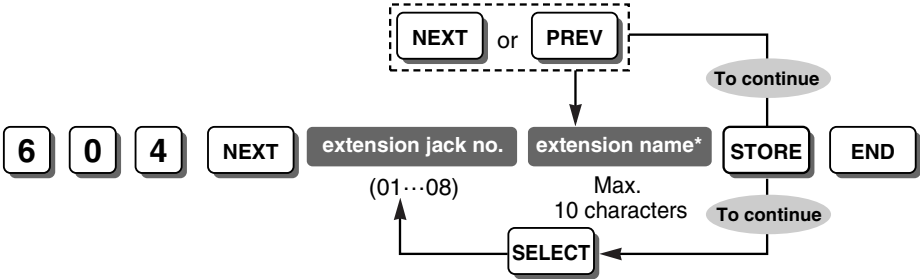


Note

* An extension name can be stored using a PT's dialling buttons. The displayed character varies depending on the number of times that the dialling button is pressed. It is possible to toggle between "Alphabet mode" and "Numeral mode" by pressing SELECT.

Feature & Programming References

- 1.5.1.1 Intercom Call
- 3.3.1 Programming Instructions—Entering Characters


Account Code Mode [605]

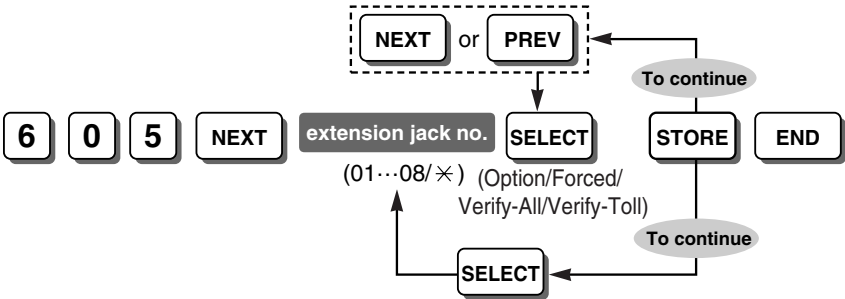

Feature & Programming References

- 1.5.2.3 Account Code Entry
- 1.8.2 Toll Restriction (TRS) Override by Account Code
- Account Code [310]

Call Transfer to CO Line [606]

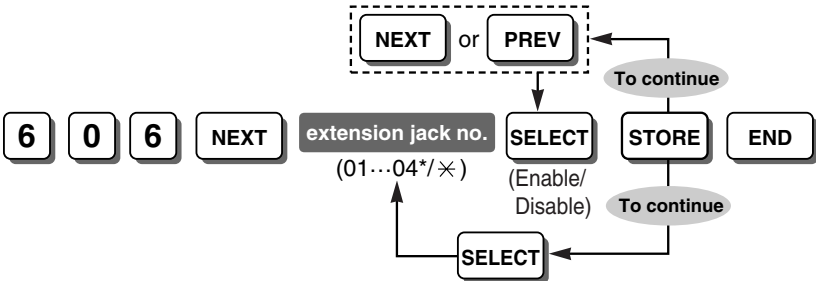

Note


* The highest extension jack number may be "08", depending on your country/area.

Feature & Programming References

1.11.1 Call Transfer

1.13.1.2 Conference


Call Forwarding to CO Line [607]

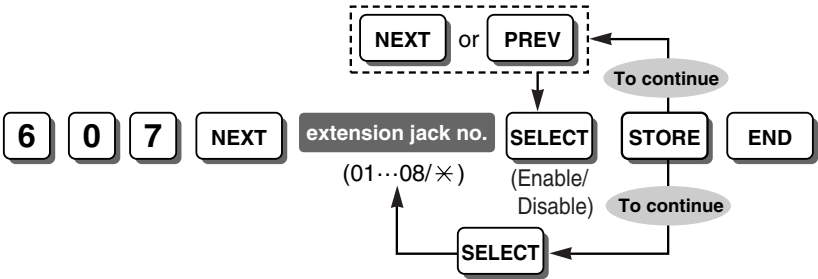

Feature & Programming References

1.3.1.2 Call Forwarding (FWD)


Executive Busy Override [608]

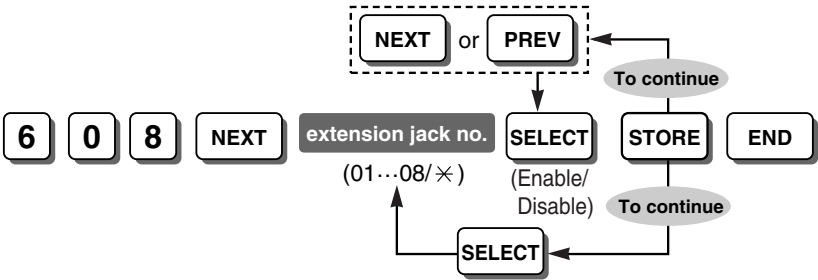

Feature & Programming References

1.7.2 Executive Busy Override


DND Override [609]

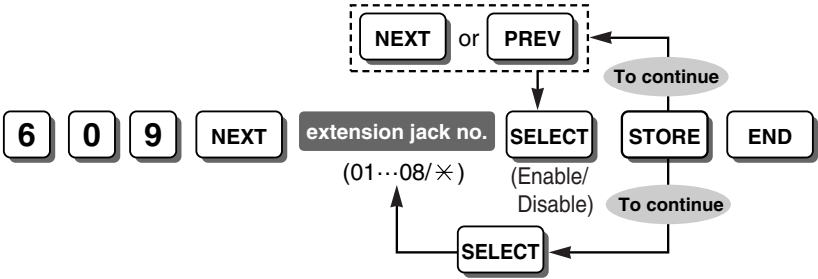

Feature & Programming References


1.3.1.3 Do Not Disturb (DND)

Parallellled Telephone [610]

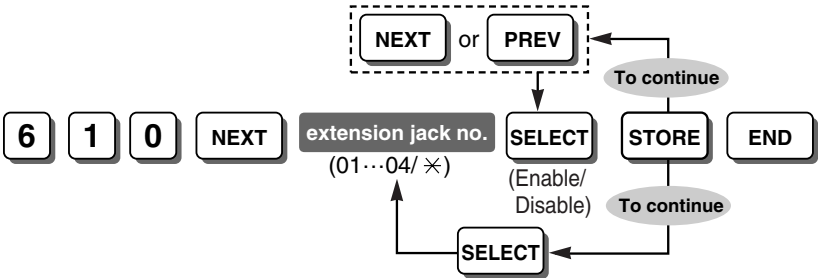

Feature & Programming References
1.10.9 Parallellled Telephone


TAM Extension [611]

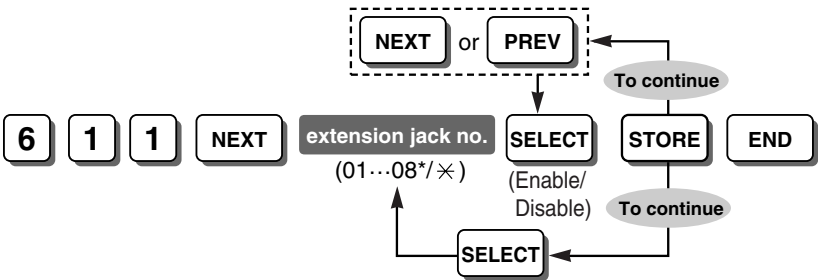

Note
* The highest extension jack number may be "04", depending on your country/area.

Feature & Programming References
1.4.1.3 Call Pickup

Room Monitor [612]

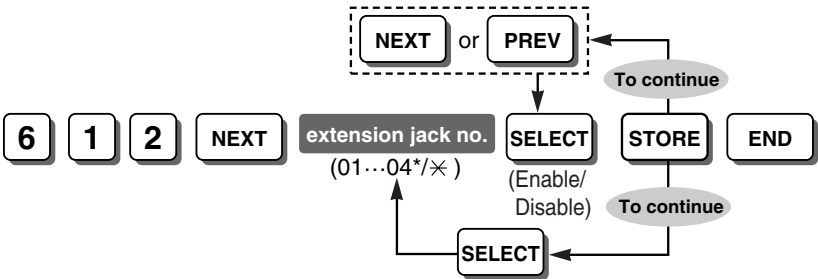


Notes

- * The highest extension jack number may be "08", depending on your country/area.
- Extensions that are to be monitored must have their jacks set to "Enable" in this programme in advance.

Feature & Programming References

1.10.2 Room Monitor

CO Line Call Duration Limitation [613]

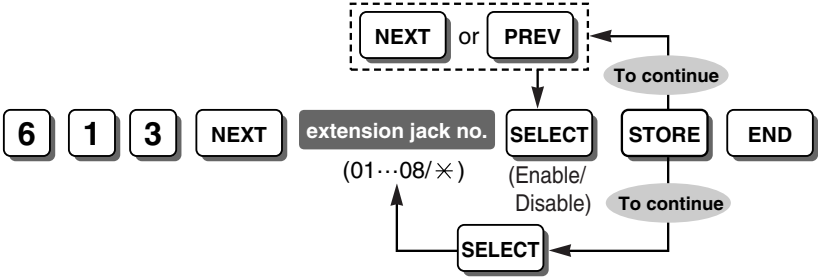


Feature & Programming References

1.10.8 Outside (CO) Line Call Limitation

Extension-to-CO Line Call Duration [212]

Internal Pulse Detection [614]

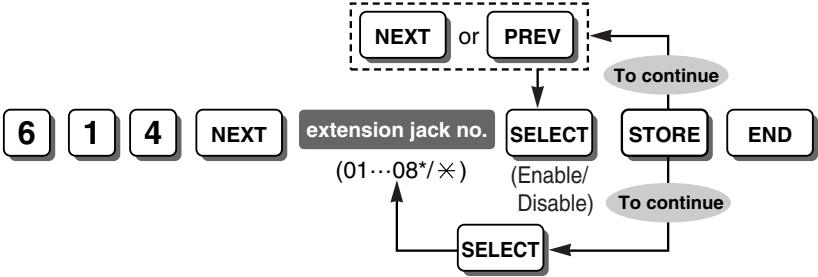

Note


* The highest extension jack number may be "04", depending on your country/area.

Feature & Programming References

1.12.1 Call Hold

Hookswitch Flash Timing Range [207]

LCD Language [615]

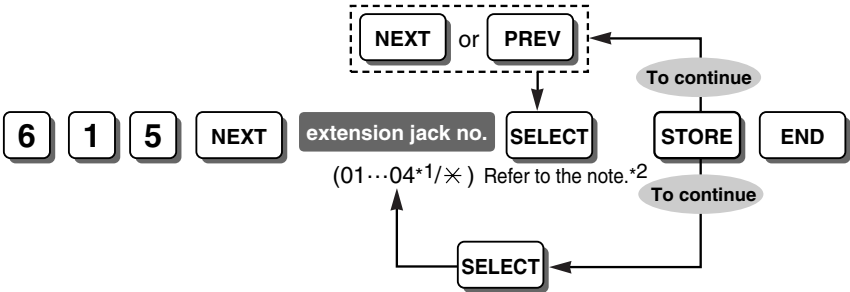


3.3 PT Programming

Notes

- *1 The highest extension jack number may be "08", depending on your country/area.
- *2 The following languages are available for the LCD:
English; Spanish; Portuguese; Russian; Greek; Czech; Hungarian; Slovak; Polish; Italian; Ukrainian
Selections vary depending on your country/area.
- Russian display is only available for the KX-T7730/KX-T7735RU.
- When "Russian" or "Ukrainian" is selected in this programme, during intercom calls, the calling extension's name assigned in Extension Name in Cyrillic [616] is displayed at the called extension. When another language is selected, the calling extension's name assigned in Extension Name [604] is displayed.

Extension Name in Cyrillic [616]

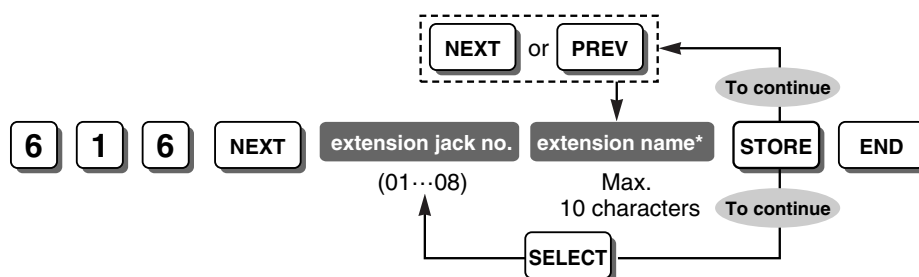

Notes

- * An extension name can be stored using a PT's dialling buttons. The displayed character varies depending on the number of times that the dialling button is pressed. It is possible to toggle between "Alphabet mode", "Cyrillic alphabet mode", and "Numeral mode" by pressing SELECT.
- Russian display is only available for the KX-T7730/KX-T7735RU.


Feature & Programming References

1.5.1.1 Intercom Call

3.3.1 Programming Instructions—Entering Characters

LCD Language [615]

Message Waiting for Another Extension [618]

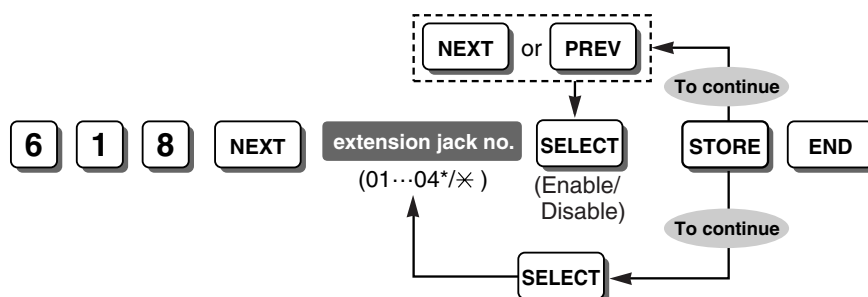


Note

- * The highest extension jack number may be "08", depending on your country/area.

Feature & Programming References

1.17.1 Message Waiting

SLT Message Waiting [619]

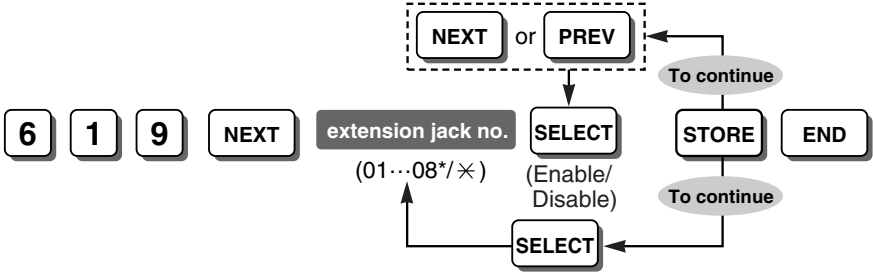


Note

* The highest extension jack number may be "04", depending on your country/area.

Feature & Programming References

1.17.1 Message Waiting

LCS Recording Mode Set [620]

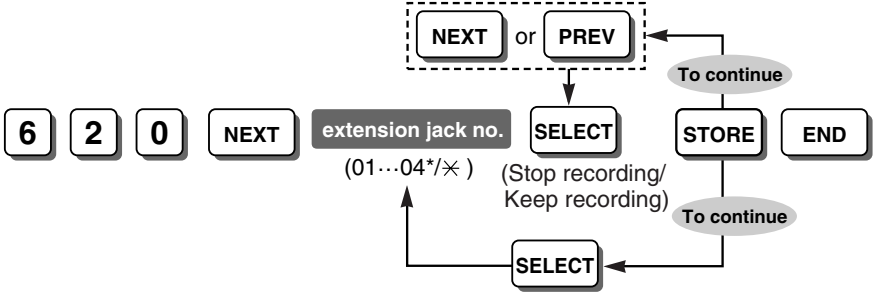


Note

* The highest extension jack number may be "08", depending on your country/area.

Feature & Programming References

1.19.1 Voice Mail APT Integration

BGM Control for APT [626]

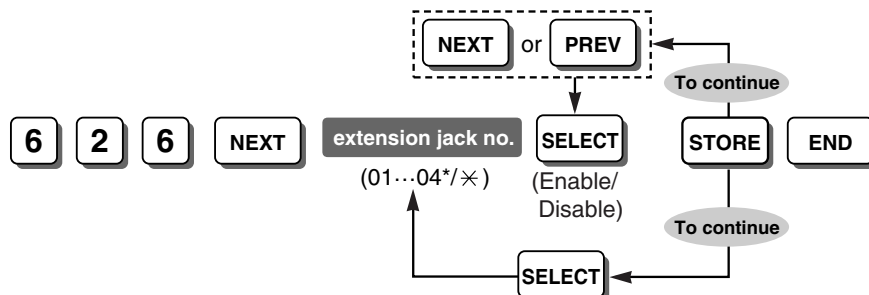


Note

* The highest extension jack number may be "08", depending on your country/area.

Feature & Programming References

1.15.4 Background Music (BGM)

SLT Ring Wait Time for New Call [627]

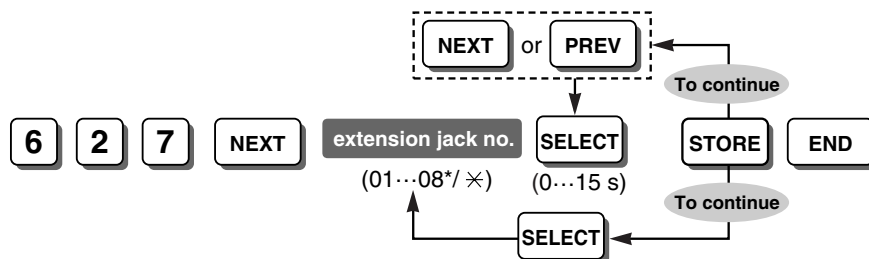


Note

* The highest extension jack number may be "04", depending on your country/area.

Feature & Programming References

1.16.1 Caller ID

SLT Caller ID [628]

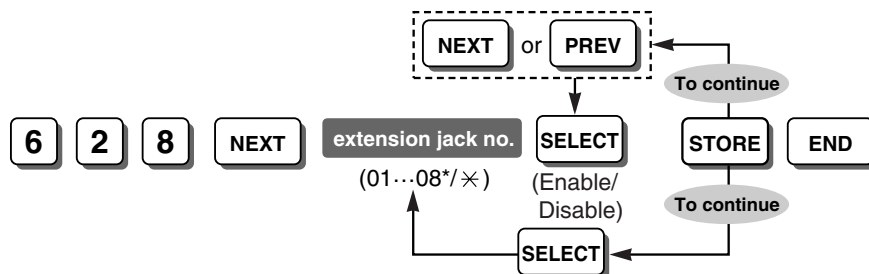


Note

* The highest extension jack number may be "04", depending on your country/area.

Feature & Programming References

1.16.1 Caller ID

SLT Fixed Bell Pattern [629]

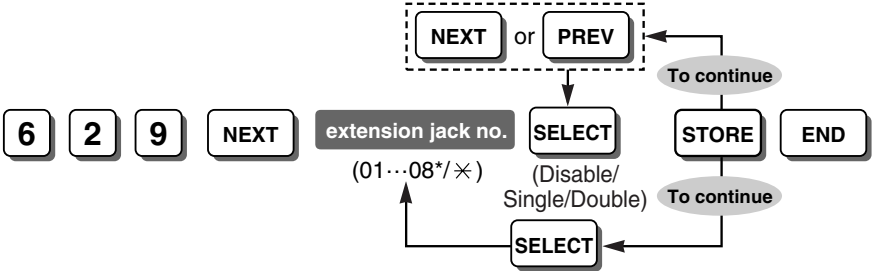

Note


* The highest extension jack number may be "04", depending on your country/area.

Feature & Programming References

1.1.3.3 Ring Tone Pattern Selection

1.16.1 Caller ID


Doorphone Ringing—Day/Night/Lunch [700-702]

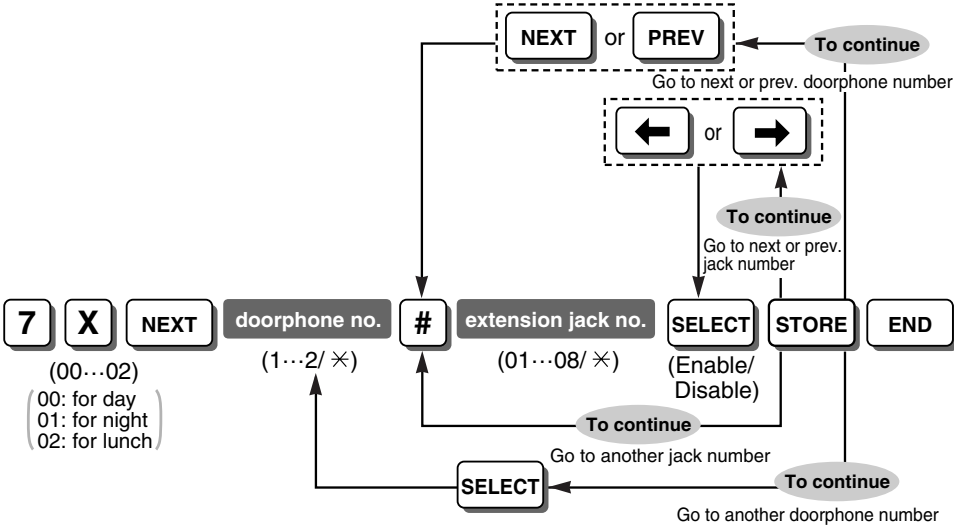

Feature & Programming References


1.15.1 Doorphone Call

Door Opener—Day/Night/Lunch [703-705]

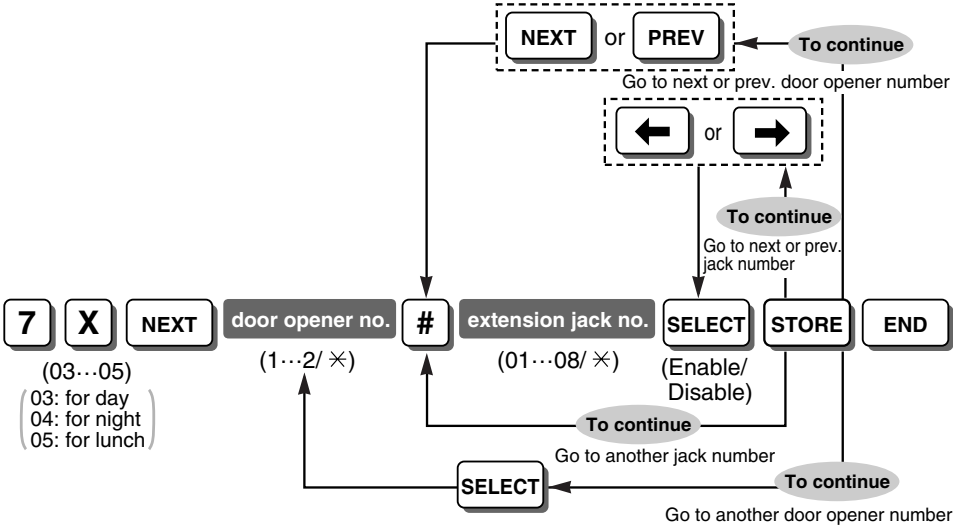

Feature & Programming References
1.15.2 Door Open


Doorphone Ring Tone Pattern [706]

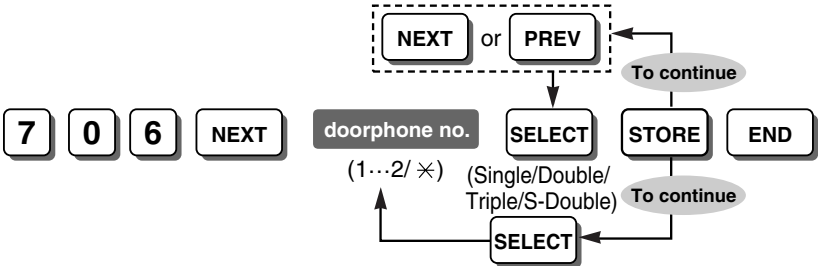

Note
It is recommended that you set a different ring tone pattern from the ring tone patterns specified in Extension Ring Tone Pattern [115] and CO Line Ring Tone Pattern [423].

Feature & Programming References
1.1.3.3 Ring Tone Pattern Selection
1.15.1 Doorphone Call


Doorphone Access Tone [707]

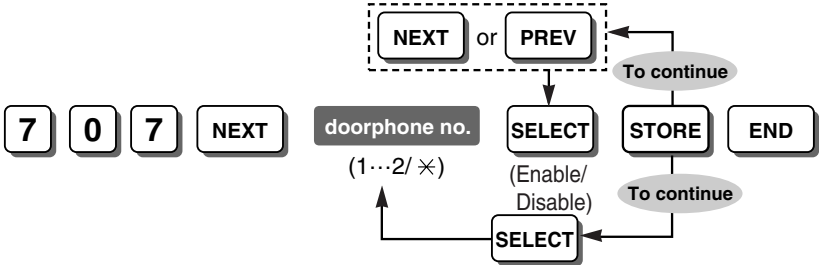

Feature & Programming References

- 1.10.2 Room Monitor
- 1.15.1 Doorphone Call


Doorphone Ring Time [708]

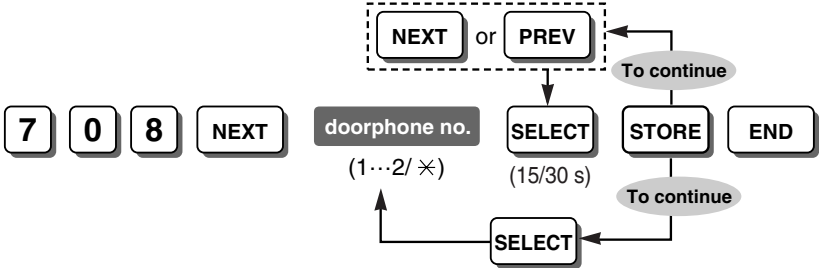

Feature & Programming References

- 1.15.1 Doorphone Call


Door Open Duration [709]

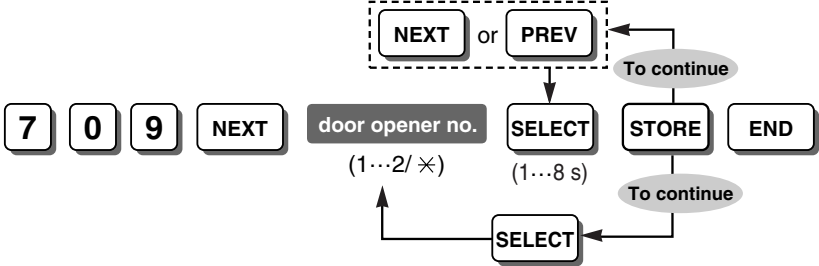

Feature & Programming References


- 1.15.2 Door Open

Doorphone Ring/Chime [710]

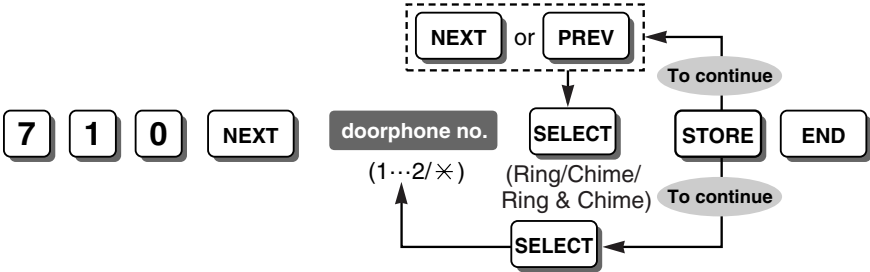


Feature & Programming References
1.15.3 Doorbell/Door Chime
Doorphone Ringing—Day/Night/Lunch [700-702]

Doorphone Chime Assignment [711]

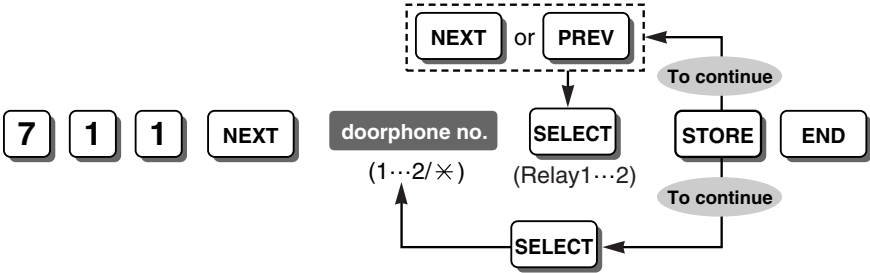


Feature & Programming References
1.15.3 Doorbell/Door Chime
Doorphone Ring/Chime [710]

Doorphone Chime Pattern [712]

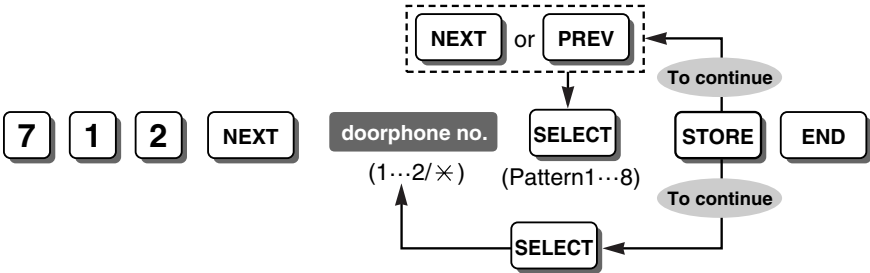

Feature & Programming References
1.15.3 Doorbell/Door Chime
4.2.1 Tones/Ring Tones

SMDR RS-232C Parameter [800]

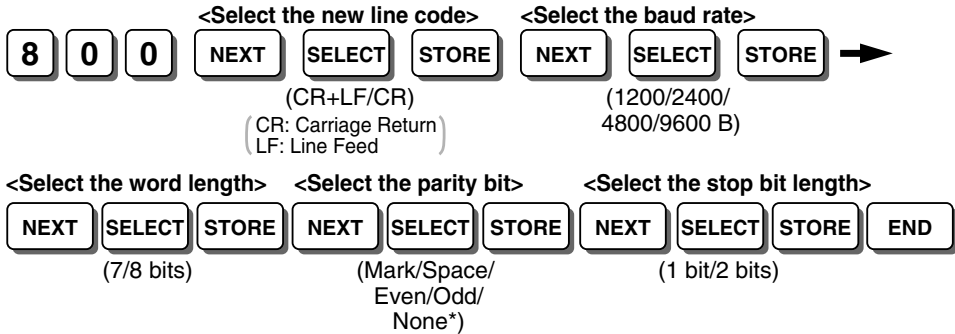

Notes

- * Select "None" when the printer does not require error checking.
- The following combinations are invalid.


Parity	Word length	Stop bit length
Mark	8	2
Space	8	1
Space	8	2

If any of the above invalid combinations are selected, an alarm tone will be heard.

Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)

SMDR Parameter [801]

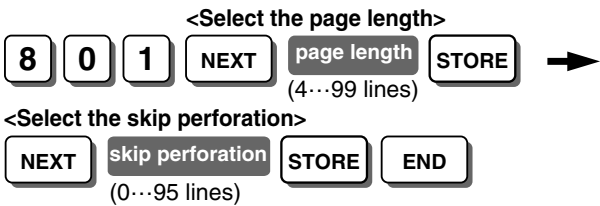

Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)

Incoming/Outgoing Call Selection for Printing [802]



3.3 PT Programming


Note

Outgoing Call: On (Print all calls)/Off (No printing)/Toll (Print toll calls only)
Incoming Call: On (Print all calls)/Off (No printing)

Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)
TRS—COS 2-5 Denied Code [302-305]

Secret Number SMDR Print Suppression [803]




Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)
System Speed Dialling Number [001]

System Data Dump [804]

<To select All parameters, System parameter, Speed dial, and/or Stop output>

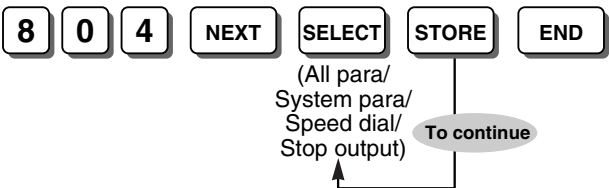

<To select the CO (outside line) parameter>



<To select the Extension parameter>




<To select the DSS parameter>



Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)

SMDR Account Code [805]



Feature & Programming References

1.8.2 Toll Restriction (TRS) Override by Account Code

1.20.1 Station Message Detail Recording (SMDR)

Account Code [310]

Account Code Mode [605]

SMDR Language [806]




Note

* The following languages are available for SMDR:
English; Spanish; Portuguese; Greek; Czech; Hungarian; Slovak; Polish; Italian
Selections vary depending on your country/area.

Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)

Caller ID [900]

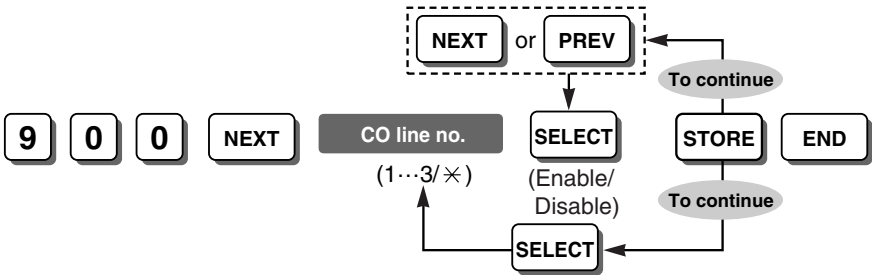


Note

The DISA Delayed Answer Time for the outside (CO) lines enabled here will always be 6 seconds even if "0 s" or "3 s" is selected in DISA Delayed Answer Time [504].

Feature & Programming References

1.16.1 Caller ID


Caller ID Area Code [901]

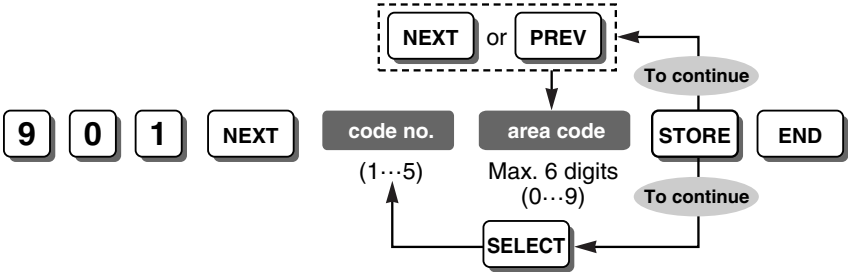

Feature & Programming References

- 1.16.1 Caller ID
- 1.16.2 Incoming Call Log
- Caller ID Modification for Local Calls [902]


Caller ID Modification for Local Calls [902]

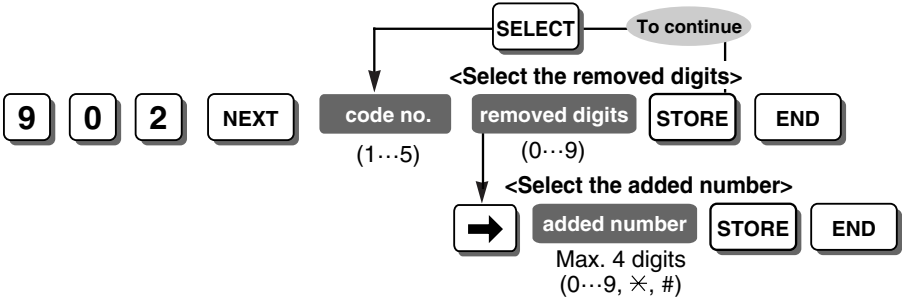

Feature & Programming References

- 1.16.1 Caller ID
- 1.16.2 Incoming Call Log
- Caller ID Area Code [901]


Caller ID Modification for Long-distance Calls [903]

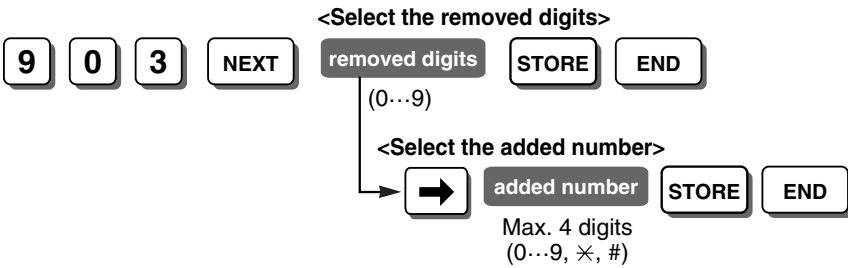

Feature & Programming References

- 1.16.1 Caller ID
- 1.16.2 Incoming Call Log

Caller ID Log Priority [904]

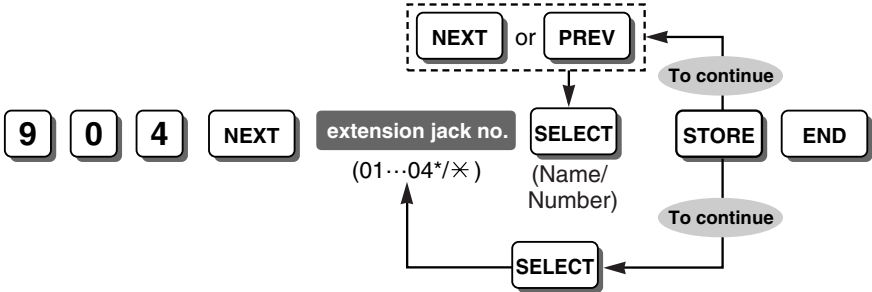

Notes

- * The highest extension jack number may be "08", depending on your country/area.
- This programme is available when the Caller ID service provides both a name and a number. If only the number is provided, this programme is not necessary.

Feature & Programming References

- 1.16.2 Incoming Call Log
- 1.18.4 Display Information


Caller ID Automatic 0 Addition [905]



Feature & Programming References

- 1.16.1 Caller ID

Caller ID SMDR Format [906]




Note

Even if a name is also sent by the Caller ID service, only the number is printed.

Feature & Programming References

- 1.20.1 Station Message Detail Recording (SMDR)


Caller ID SMDR Printout [907]



Feature & Programming References

1.20.1 Station Message Detail Recording (SMDR)

Common Area Call Log Check [909]

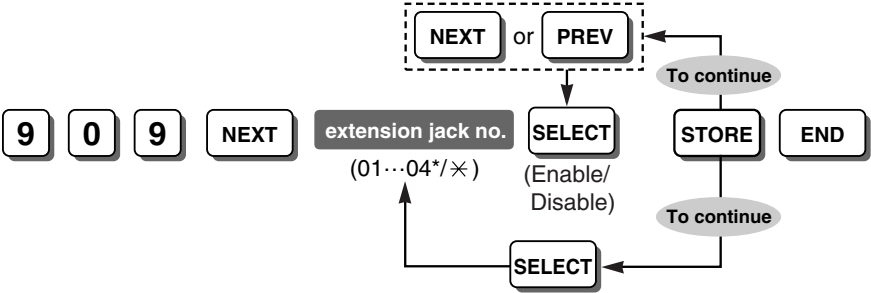


Note

* The highest extension jack number may be "08", depending on your country/area.

Feature & Programming References

1.16.2 Incoming Call Log


Caller ID Type [910]

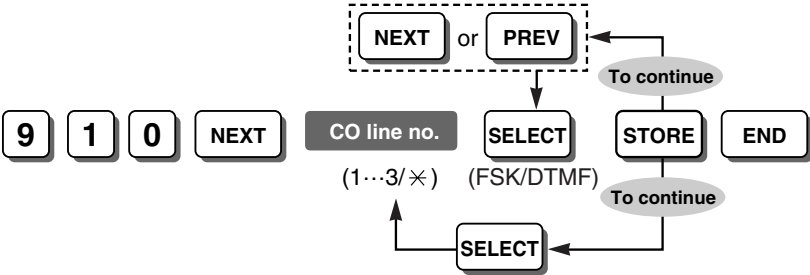

Feature & Programming References

1.16.1 Caller ID

Call Log Next Page [927]



Note

This programme enables the PBX to include page breaks when printing out call logs for each extension.

SMDR Mode for Printing [929]




Note

Even if "On" (outgoing/incoming call) or "Toll" (outgoing call) is selected in Incoming/Outgoing Call Selection for Printing [802], when "MODE 2" is selected in this programme, the call log information is not displayed by SMDR, but the information for each extension is displayed by Call Log Printout.

Feature & Programming References

- 1.20.1 Station Message Detail Recording (SMDR)
- 1.20.2 Call Log Printout for Each Extension

Call Forwarding Selection [963]

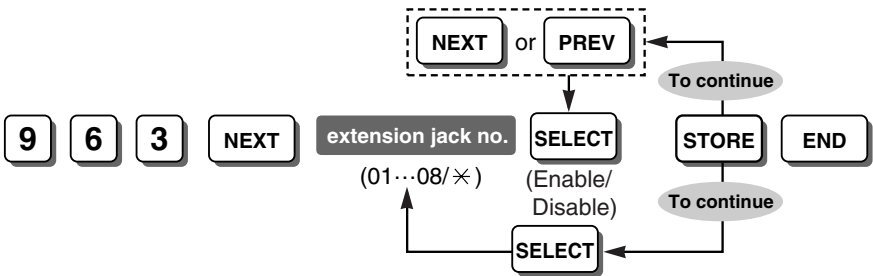


Note

This programme also functions for outside (CO) line calls via the DISA Intercept Routing feature, and when DISA calls are received by a DISA ring group.

Feature & Programming References

- 1.3.1.2 Call Forwarding (FWD)
- CO Line Mode—Day/Night/Lunch [414-416]

TRS Check after Answering [966]



Note

This programme specifies whether the PBX checks DTMF signals when answering calls or not.


TRS Check Time after Answering [967]



Note

This programme specifies the length of time that the DTMF signal is checked when "Enable" is selected in TRS Check after Answering [966].


KX-T7700 Series Incoming Lamp Control [968]



Feature & Programming References

1.17.1 Message Waiting

Country [995]




Notes

- This programme specifies your country/area when the suffix of the PBX is "NE" or "CE". For more information, please consult your dealer.
- When the country code is changed, all system data is initialised.

Feature & Programming References

2.3.6 Country Setting

Firmware Version [998]

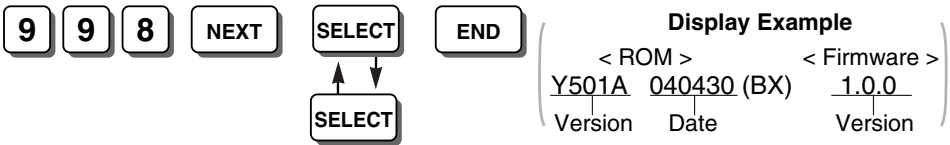

Note


You can confirm the ROM and the firmware version of the PBX alternately by pressing SELECT.

Feature & Programming References

2.3.7 Firmware Upgrade

System Data Clear [999]

<To select All parameters, System parameter, and/or Speed dial>

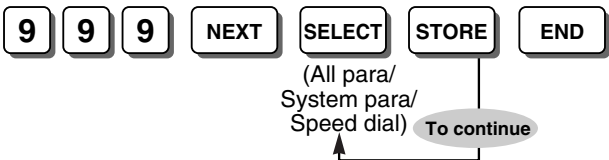

<To select the CO (outside line) parameter>



<To select the Extension parameter>



<To select the DSS parameter>



Feature & Programming References

2.3.2 PT Programming

3.3 PT Programming

Section 4

Appendix

4.1 Capacity of System Resources

4.1.1 Capacity of System Resources

Category	Item	KX-TEB308
System	Outside (CO) Line Group	3
	Extension Group	8
	Absent Message	6 × 16 characters
	Message Waiting	8/extn.
	Number of Characters of Name	10
	Extension Number Digits	2 or 3
	Call Park Zone	10
	Conference (5-party)	1
	Account Code	4 digits, 50 entries
	Host PBX Access Code	1 or 2 digits, 8 entries
	Station Message Detail Recording (SMDR)	64 calls
	Intercom Call	3
	Outgoing Message (OGM) for DISA/UCD	32 resources/PBX (8 resources for Direct Inward System Access [DISA]/Uniform Call Distribution [UCD], 24 resources for 3-level Automated Attendant [AA])
Dialling	Emergency Call	24 digits, 5 entries
	Quick Dialling	10 digits, 10 entries
	System Speed Dialling	32 digits, 100 entries
	Personal Speed Dialling	24 digits, 10 entries/extn.
	One-touch Dialling	24 digits
	Hot Line	32 digits
	Redial	64 digits
Automatic Route Selection (ARS)	Leading Number Table	7 digits, 80 entries
	Leading Number Exception Table	7 digits, 80 entries
	ARS Carrier	4
Toll Restriction (TRS)	Class of Service (COS)	5
	Denied Code Table	11 digits, 80 entries
	Exception Code Table	11 digits, 80 entries

4.1 Capacity of System Resources

Category	Item	KX-TEB308
Call Log	Incoming Call Log	20 entries/extn., 300 entries/PBX
	System Password	4–7 digits
Password	Extension Password	4 digits


4.2 Tones/Ring Tones

4.2.1 Tones/Ring Tones

Tone Patterns

Dial Tone 1

Normal




Dial Tone 2

Any of the following features is set:

- Absent Message
- Background Music (BGM) (proprietary telephone [PT] only)
- Call Forwarding (FWD)
- Call Pickup Deny
- Data Line Security
- Do Not Disturb (DND)
- Extension Lock
- Hot Line (single line telephone [SLT] only)
- Message Waiting (PT only)
- Remote Extension Lock
- Timed Reminder






[Czech Republic only]






Dial Tone 3

- When going off-hook with an SLT that has messages waiting
- When Account Code Entry is performed
- When answering a call from Timed Reminder



Busy Tones**[New Zealand only]****[Czech Republic only]****Reorder Tones**

The outside (CO) line you tried to seize is not assigned or was denied.

**[Czech Republic only]****[Malaysia only]****Ringback Tones**

Single (3-s interval)



Double (3-s interval)



Single (5-s interval)



Double (5-s interval)




4.2 Tones/Ring Tones

DND Tone

The dialled extension is refusing incoming calls.



Call Waiting Tone 1



Call Waiting Tone 2

Single



Double




Triple




Hold Alarm Tone

A call has been on hold for longer than the specified time.



Warning Tone (Outside (CO) Line Call Limitation)

This tone is sent 15 seconds before the specified time for disconnection.



Confirmation Tone 1

The feature was set successfully, or the Extension Lock feature was set or cancelled.



Confirmation Tone 2


The new feature setting was the same as the previous setting, or certain features were successfully performed or accessed (e.g., Call Hold, Automatic Callback Busy).



Confirmation Tone 3

Before the following features activate:


- Retrieving a held call
- Picking up another call
- Establishing a conference call
- Paging/Answering a paging announcement



Ring Tone Patterns


Ring Tone Patterns

The following ring tone patterns can be assigned to incoming call types (outside (CO) line, intercom, or doorphone calls), or are fixed for certain call types (Hold Recall, Timed Reminder, or Camp-on Recall).

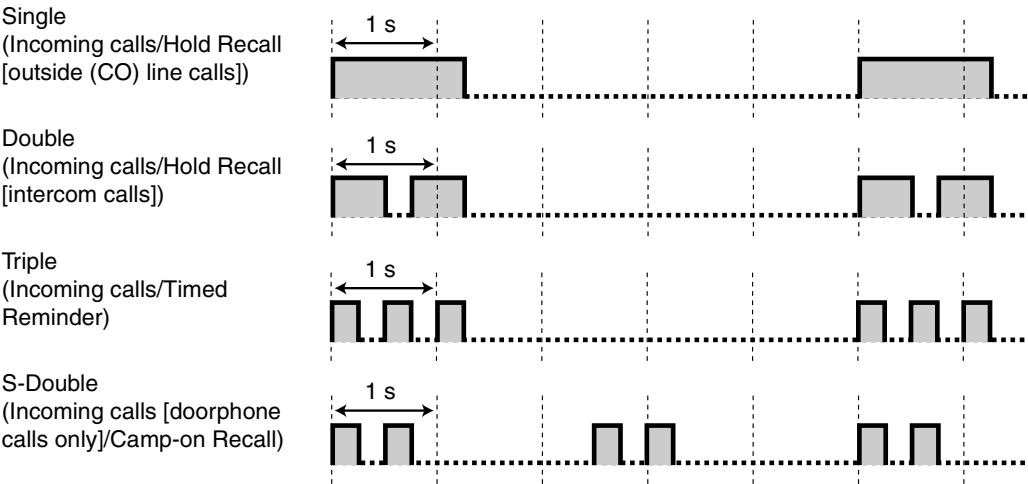


Ring Tone Patterns Sent from the Telephone Company (New Zealand only)

The following ring tone patterns sent from the telephone company can be detected for each outside (CO) line.

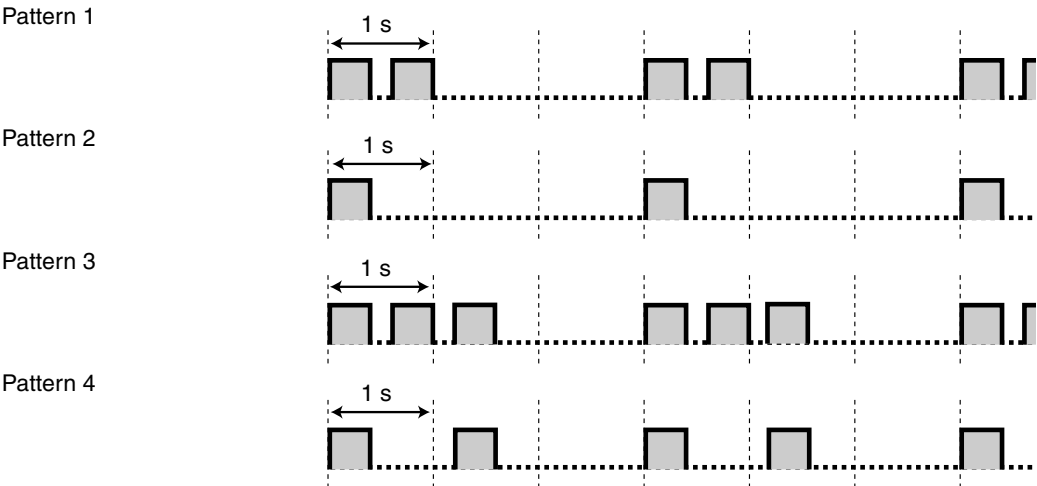

Doorphone Chime Patterns

The following doorphone chime patterns can be assigned to each doorphone when doorbells and door chimes are connected to the PBX.

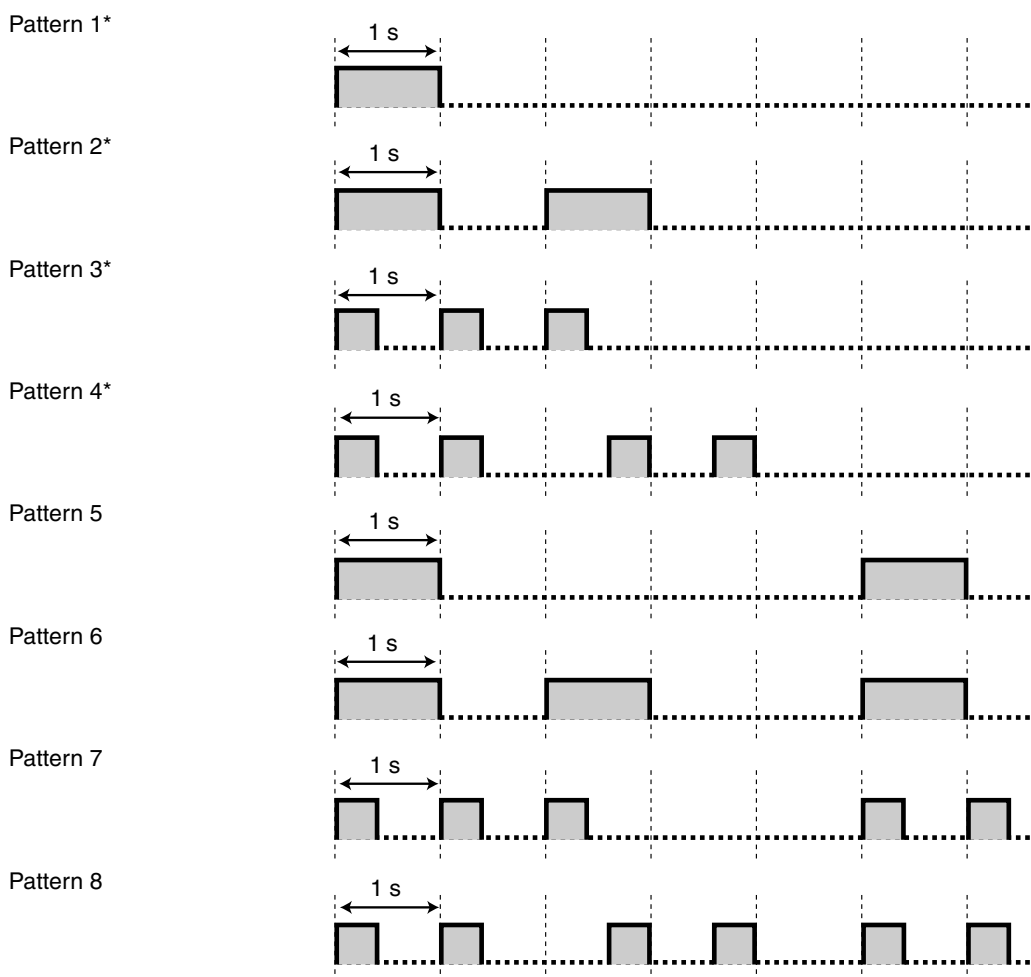

* Chime patterns 1 to 4 are played only one time during the doorphone ringing time.

4.2 Tones/Ring Tones

Index

Numerics

1st Carrier Selection Code [359]	210
2-way Recording into the VPS	139
3-level AA Assignment [540-549]	230
3-level Automated Attendant (AA)	105
3-party Conference	97
5-party Conference	97

A

Absent Message	123
Account Code [310]	209
Account Code Entry	43
Account Code Mode [605]	232
Administrative Information Output Features	144
Alternate Calling—Ring/Voice	39
Alternate Receiving—Ring/Voice	39
Answering Features	35
Answering Features—OVERVIEW	35
Appendix	253
ARS CO Line Group [364]	212
ARS Dial Tone [362]	211
ARS Inter-digit Time [363]	211
ARS Modification—Added Number [361]	211
ARS Modification—Removed Digits [360]	211
ARS Selection [350]	210
ARS —> Automatic Route Selection (ARS)	72
Audible Tone Features	152
Authorisation and Itemised Billing Code Order [390]	213
Authorisation Code	75
Automatic Callback Busy (Camp-on)	61
Automatic Configuration for Outside (CO) Line Type	176
Automatic Designated Line Access [419]	218
Automatic Line Access (Local Access)	51
Automatic Line Access [121]	200
Automatic Pause Insertion Code [311]	209
Automatic Redial	57
Automatic Redial Interval [114]	198
Automatic Redial Repeat Count [113]	198
Automatic Rotation for CO Line Access [122]	200
Automatic Route Selection (ARS)	72
Automatic Route Selection (ARS) Features	72
Automatic Time Adjustment	170
Automatic Time Adjustment [152]	204

B

Background Music (BGM)	104
Bell Frequency [120]	200
Bell-off Detection [213]	207
BGM Control for APT [626]	238
BGM —> Background Music (BGM)	104
Break Ratio [123]	200
Busy Line/Busy Party Features	61
Busy Tones	257
Buttons and Functions	184

C

Call Duration Counter Start [204]	205
Call Forwarding (FWD)	31

Call Forwarding (FWD)/Do Not Disturb (DND)	30
Call Forwarding (FWD)/Do Not Disturb (DND) Features	30
Call Forwarding (FWD)/Do Not Disturb (DND)—OVERVIEW	30
Call Forwarding Selection [963]	249
Call Forwarding Start Time [202]	205
Call Forwarding to CO Line [607]	233
Call Handling Features	13
Call Hold	90
Call Log Next Page [927]	248
Call Log Printout for Each Extension	149
Call Park	92
Call Park Recall	92
Call Pickup	37
Call Pickup Deny	37
Call Pickup Tone [117]	199
Call Retrieving from a Telephone Answering Machine (TAM)	37
Call Splitting	93
Call Transfer	88
Call Transfer to CO Line [606]	232
Call Transfer with Announcement	88
Call Transfer without Announcement	88
Call Transfer—Screened —> Call Transfer with Announcement	88
Call Transfer—Unscreened —> Call Transfer without Announcement	88
Call Waiting	22
Call Waiting Tone	63
Caller ID	114
Caller ID [900]	245
Caller ID Area Code [901]	246
Caller ID Automatic 0 Addition [905]	247
Caller ID Display on SLT	114
Caller ID Features	114
Caller ID Log Priority [904]	247
Caller ID Modification for Local Calls [902]	246
Caller ID Modification for Long-distance Calls [903]	246
Caller ID SMDR Format [906]	247
Caller ID SMDR Printout [907]	247
Caller ID Type [910]	248
Calling Party Control (CPC) Signal Detection	87
Capacity of System Resources	254
Carrier Exception Code [300]	207
Circular Hunting	23
Class of Service (COS)	157
Clear All OGMs of DISA/UCD [599]	231
CO Indicator [109]	197
CO Line Call Duration Limitation [613]	235
CO Line Connection [400]	213
CO Line Group Number [404]	215
CO Line Mode—Day/Night/Lunch [414-416]	217
CO Line Ring Tone Pattern [423]	220
Collect Call Block [425] (Brazil only)	221
Common Area Call Log Check [909]	248
Conference	97
Conference Features	96
Conference Features—OVERVIEW	96
Conference Pattern [116]	199
Conference Tone [105]	196
Confirmation Tone	153
Console Paired Telephone [004]	191
Consultation Hold	95
Conversation Features	78

COS → Class of Service (COS) 157
 CO-to-CO Line Call Duration [205] 205
 Country [995] 250
 Country Setting 177
 CPC Signal Detection—Incoming [420] 219
 CPC Signal Detection—Outgoing [421] 219
 CPC → Calling Party Control (CPC) Signal Detection 87
 Cyclic Tone Detection [513] 227

D

Data Line Security 82
 Date & Time [000] 189
 Delayed Ringing 28
 Delayed Ringing—Day/Night/Lunch [411-413] 216
 Denied Code Tables 64
 Dial Mode [401] 214
 Dial Tone 152
 Dial Type Selection 44
 Dialling Start Time [206] 205
 DIL → Direct In Line (DIL) 14
 Direct In Line (DIL) 14
 Direct Inward System Access (DISA) 106
 Direct Inward System Access (DISA) Ring 28
 Direct One-touch Answering 35
 Direct Outside (CO) Line Access 51
 Directed Call Pickup 37
 DISA AA Service 106
 DISA AA Wait Time [517] 227
 DISA Built-in AA [501] 223
 DISA Busy Mode [506] 224
 DISA Delayed Answer Time [504] 224
 DISA Incoming Assignment [516] 227
 DISA Incoming Call Dial Mode [500] 223
 DISA Intercept Mode [507] 225
 DISA No Dial Mode [510] 225
 DISA Ring Time after Intercept [509] 225
 DISA Ring Time before Intercept [508] 225
 DISA Ringback Tone [531] 230
 DISA Security Code [512] 226
 DISA Security Code Digits [530] 230
 DISA Security Mode [511] 226
 DISA Tone after Security Code [518] 228
 DISA Wait Time after OGM [505] 224
 DISA → Direct Inward System Access (DISA) 28, 106
 Disconnect Time [422] 219
 Display Information 134
 Distinctive Ring Detection (DRD) [426] (New Zealand only) 221
 Distinctive Ring Detection (DRD) for New Zealand 20
 DND Override 34
 DND Override [609] 233
 DND Tone 258
 DND → Call Forwarding (FWD)/Do Not Disturb (DND) 30
 Do Not Disturb (DND) 34
 Door Open 101
 Door Open Duration [709] 241
 Door Opener—Day/Night/Lunch [703-705] 240
 Doorbell/Door Chime 102
 Doorphone Access Tone [707] 241
 Doorphone Call 100

Doorphone Chime Assignment [711] 242
 Doorphone Chime Pattern [712] 242
 Doorphone Chime Patterns 261
 Doorphone Ring Time [708] 241
 Doorphone Ring Tone Pattern [706] 240
 Doorphone Ring/Chime [710] 242
 Doorphone Ringing—Day/Night/Lunch [700-702] 239
 DRD Pattern 2 and 3 Ring Tone [433-434] (New Zealand only) 223
 DRD Ring Pattern 2 Extension Assignment—Day/Night/Lunch [427-429] (New Zealand only) 222
 DRD Ring Pattern 3 Extension Assignment—Day/Night/Lunch [430-432] (New Zealand only) 222
 DRD → Distinctive Ring Detection (DRD) for New Zealand 20
 DSS Console Jack Assignment [003] 191
 DSS Lamp Mode [112] 198
 DSS Off-hook Mode [126] 201
 DTMF Integration [103] 196
 DTMF Integration Port [102] 196
 DTMF Receiver Check [107] 197
 DTMF Time [210] 206

E

EFA → External Feature Access (EFA) 84
 Electronic Station Lockout → Extension Lock 70
 Emergency Call 42
 Emergency Number [309] 208
 Entering Characters 186
 Entering Manager Programming Mode 185
 Entering System Programming Mode 185
 Exception Code Tables 64
 Exclusive Call Hold 90
 Executive Busy Override 62
 Executive Busy Override [608] 233
 Executive Busy Override Deny 62
 Extension Controlling Features 150
 Extension Feature Clear 150
 Extension Group [600] 231
 Extension Jack Configuration 156
 Extension Lock 70
 Extension Lock—CANCEL ALL 70
 Extension Name [604] 232
 Extension Name in Cyrillic [616] 236
 Extension Number [009] 193
 Extension Ring Tone Pattern [115] 199
 Extension-to-CO Line Call Duration [212] 207
 Extension-to-Outside (CO) Line Call Duration 85
 External Feature Access (EFA) 84
 External Pager Access Tone [106] 197

F

Fault Recovery/Diagnostics 179
 FAX Connection [503] 224
 FAX Tone Detection [514] 227
 Feature Guide References 2
 Feature Highlights 5
 Feature Numbering 171
 Firmware Upgrade 178
 Firmware Version [998] 250
 Fixed Buttons 128

Index

Fixed Line SMS Terminal Support 124
Flash/Recall 83
Flash/Recall Key Mode [110] 197
Flash/Recall Mode for a Locked Extension [108] 197
Flash/Recall Time [418] 218
Flexible Buttons 130
Flexible Outward Dialling—Day/Night/Lunch [405-407] 215
Flexible Ringing—Day/Night/Lunch [408-410] 216
FWD to Outside (CO) Line 31
FWD → Call Forwarding (FWD)/Do Not Disturb (DND) 30
FWD—All Calls 31
FWD—Busy/No Answer 31
FWD—Follow Me 31

G

General Call Hold 90
Group 158
Group Call Pickup 37

H

Handset/Headset Selection → Headset Operation 81
Hands-free Answerback 38
Hands-free Operation 78
Headset Operation 81
Hold Recall 90
Hold Recall Time [200] 204
Holding Features 90
Hookswitch Flash Timing Range [207] 206
Host PBX Access Code (Access Code to the Telephone Company from a Host PBX) 47
Host PBX Access Code [403] 214
Hot Line 60
Hot Line Waiting Time [203] 205
Hunting Group Set [100] 195
Hunting Type [101] 195

I

Idle Extension Hunting 23
Idle Line Preference 50
Incoming Call Features 14
Incoming Call Indication Features 17
Incoming Call Indication Features—OVERVIEW 17
Incoming Call Log 118
Incoming Call Log Display Lock 119
Incoming Outside (CO) Line Call Features 14
Incoming Reverse [153] 204
Incoming/Outgoing Call Selection for Printing [802] 243
Installation Manual References 2
Installing and Starting KX-TEB308 Maintenance Console 183
Intercept Routing 15
Intercept Routing—No Answer (IRNA) 15
Intercept Routing—No Dial 15
Intercept Time for Internal DISA [515] 227
Intercom Call 39
Intercom Call Features 39
Inter-digit Time [208] 206
Internal Call Features 16
Internal Pulse Detection [614] 235
Introduction 182

IRNA → Intercept Routing—No Answer (IRNA) 15
Itemised Billing Code 75
Itemised Billing Code [389] 213

K

KX-T7700 Series Incoming Lamp Control [968] 250
KX-T7710 One-touch Dialling 56
KX-T7710 One-touch Dialling [013] 195

L

Last Number Redial 57
LCD Language [615] 235
LCD Time Display [010] 193
LCS Recording Mode Set [620] 237
LED Indication 132
Line Preference Override 50
Line Preference—Incoming 36
Line Preference—Outgoing 50
Live Call Screening (LCS) 139
Lockout 85
Log-in/Log-out 29

M

Making Call Features 39
Memory Dialling Features 53
Memory Dialling Features—OVERVIEW 53
Message Features 121
Message Waiting 121
Message Waiting for Another Extension [618] 236
Message Waiting for Another Extension Lock 121
Microphone Mute 80
Music on Hold 94
Music on Hold [111] 198

N

No Dial Disconnection [211] 206
No Line Preference 36, 50

O

OGM Mute Time [519] 228
One-touch Dialling 55
One-touch Transfer 88
One-touch Transfer Using a DSS Button [005] 191
Operator Assignment [008] 192
Operator Call 164
Operator/Manager Features 163
Optional Device Features 100
Outgoing Message (OGM) for DISA/UCD 105
Outside (CO) Line Access 51
Outside (CO) Line Call Features 41
Outside (CO) Line Call Features—OVERVIEW 41
Outside (CO) Line Call Limitation 85
Outside (CO) Line Group Access 51
Outside (CO) Line Ringing Selection 18
Outside-to-Outside (CO-to-CO) Line Call Duration 85

P

Paging 99

Paging Deny 99
 Paging Features 99
 Paging—All Extensions 99
 Paging—All Extensions & External 99
 Paging—External 99
 Paging—Group 99
 Paralleled Telephone 86
 Paralleled Telephone [610] 234
 Password Security 182
 Pause Insertion 46
 Pause Time [417] 218
 PC Programming 165, 183
 Pickup Dialling → Hot Line 60
 Pickup Group [127] 201
 Polarity Reverse Detection [424] 220
 Polarity Reverse Detection → Reverse Circuit 45
 Power Failure Connections 179
 Power Failure Restart 180
 Power Failure Transfer 179
 Prime Line Preference 36, 50
 Programming Instructions 181, 184
 Programming Procedures 189
 Proprietary Telephone (PT) Features 128
 PT Programming 168, 184
 PT Programming References 2
 PT → Proprietary Telephone (PT) Features 128
 Pulse Restriction [118] 199
 Pulse Speed [402] 214
 Pulse to Tone Conversion 44

Q

Quick Dialling 59

R

Receiving Calls 35
 Receiving Group Features 23
 Redial 57
 Redialling after Pulse to Tone Conversion [119] 200
 Remote Extension Lock 70
 Remote Station Lock Control → Remote Extension Lock 70
 Remote Timed Reminder 151
 Reorder Tones 257
 Required Telephone 184
 Reverse Circuit 45
 Ring Tone Pattern Selection 19
 Ring Tone Patterns 260
 Ring Tone Patterns Sent from the Telephone Company (New Zealand only) 260
 Ringback Tone Pattern [128] 201
 Ringback Tones 257
 Ringing Line Preference 36
 Room Monitor 79
 Room Monitor [612] 234
 Route 1-4 Authorisation Code [381-384] 212
 Route 1-4 Exception Code [355-358] 210
 Route 1-4 Itemised Billing [385-388] 212
 Route 1-4 Selection Code [351-354] 210

S

Saved Number Redial 57
 S-CO Line Access 51
 Second Feature Numbering Plan [012] 194
 Secret Dialling 54
 Secret Number SMDR Print Suppression [803] 244
 Seizing a Line Features 49
 Seizing a Line Features—OVERVIEW 49
 SLT Caller ID [628] 238
 SLT Caller ID Line Access Number [151] 204
 SLT Caller ID Signalling Type [150] 203
 SLT Fixed Bell Pattern [629] 239
 SLT Hold Mode [104] 196
 SLT Message Waiting [619] 237
 SLT Ring Bell-on Time [143] 202
 SLT Ring Wait Time for New Call [627] 238
 SLT Ring/Silence Ratio [142] 202
 SMDR Account Code [805] 245
 SMDR Language [806] 245
 SMDR Mode for Printing [929] 248
 SMDR Parameter [801] 243
 SMDR RS-232C Parameter [800] 243
 SMDR → Station Message Detail Recording (SMDR) 144
 SMS Centre Number for Receiving [145] 203
 SMS Routing Table—CO [146] 203
 SMS Routing Table—Extension [147] 203
 SMS → Short Message Service (SMS) 124
 Speed Dialling—Personal/System 58
 Station Feature Clear → Extension Feature Clear 150
 Station Hunting → Idle Extension Hunting 23
 Station Message Detail Recording (SMDR) 144
 Station Programme Clear → Extension Feature Clear 150
 Station Speed Dialling → Personal Speed Dialling 58
 System Configuration and Administration Features 155
 System Configuration—Hardware 156
 System Configuration—Software 157
 System Data Clear [999] 250
 System Data Control 165
 System Data Dump [804] 244
 System Password [002] 190
 System Requirements 183
 System Speed Dialling Name [011] 194
 System Speed Dialling Number [001] 189

T

TAM Extension [611] 234
 TAM → Call Retrieving from a Telephone Answering Machine (TAM) 37
 Terminated Hunting 23
 Time Service 160
 Time Service Start Time [007] 192
 Time Service Switching Mode [006] 192
 Timed Reminder 151
 Toll Restriction (TRS) 64
 Toll Restriction (TRS) Features 64
 Toll Restriction (TRS) Override by Account Code 68
 Tones/Ring Tones 256
 Transfer Recall 88
 Transfer Recall Time [201] 204
 Transferring Features 88

Index

TRS Check after Answering [966] 249
TRS Check for * and # [125] 201
TRS Check Time after Answering [967] 249
TRS for System Speed Dialling 65
TRS → Toll Restriction (TRS) Features 64
TRS-COS—Day/Night/Lunch [601-603] 231
TRS—COS 2-5 Denied Code [302-305] 208
TRS—Exception Code [306] 208
TRS—Extension Lock Class 67, 70
TRS—Extension Lock Class [312] 209
TRS—System Speed Dialling Class [301] 207

U

UCD Busy Mode [523] 229
UCD Busy Waiting Time [521] 228
UCD Group [520] 228
UCD Intercept Mode [524] 229
UCD OGM Message Interval Time [522] 228
UCD Ring Time after Intercept [526] 229
UCD Ring Time before Intercept [525] 229
UCD Waiting Message [527] 229
Unattended Conference 97
Unattended Conference Recall 97
Uniform Call Distribution (UCD) 25
User Manual References 2

V

VM 1 APT Port [130] 202
VM → Voice Mail Features 136
Voice Mail APT Integration 136
Voice Mail Features 136
Voice Mail Inband (DTMF) Integration 141

W

Walking COS 71
Warning Tone (Outside (CO) Line Call Limitation) 258

Panasonic Communications Co., Ltd.

1-62, 4-chome, Minoshima, Hakata-ku, Fukuoka 812-8531, Japan

Copyright:

This material is copyrighted by Panasonic Communications Co., Ltd., and may be reproduced for internal use only. All other reproduction, in whole or in part, is prohibited without the written consent of Panasonic Communications Co., Ltd.

© 2005 Panasonic Communications Co., Ltd. All Rights Reserved.

PSQX3826ZA KK0505MN0