




Pole 50X50 mm, Flux Line 25 mm, Magnetic Force 1250±5% kgf/4 Poles

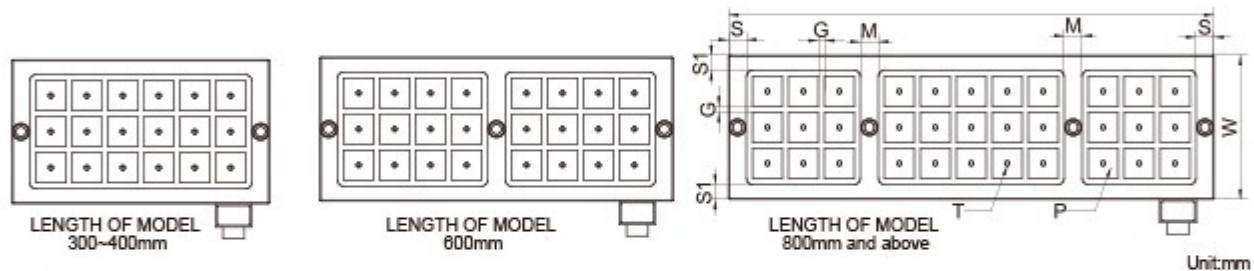

MODEL NO.	DIMENSION							PITCH G	POLE P	NO. OF POLE	TOTAL HOLDING POWER kgf ±5%	CHUCK N.W.	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (include)	VOLTAGE (Single Phase)	CURRENT AMP	CONTROLLER (include)
	W	L	S	S1	M	T	H											
EEPM-2540B	240	430	30	25	-				18	5600	50kg		18A	C1		16A	C1	
EEPM-2560B	240	590	30	25	30				24	7500	69kg		30A	C1		12A	C1	
EEPM-2580B	240	810	30	25	30				33	10300	92kg		30A	C1		19A	C1	
EEPM-2590B	240	870	30	25	30				36	11200	98kg		18A	C2		18A	C1	
EEPM-25100B	240	990	30	25	30				42	13100	111kg		26A	C2		14A	C2	
EEPM-3030B	300	310	30	25	-				16	5000	44kg		20A	C1		8A	C1	
EEPM-3040B	300	430	30	25	-				24	7500	61kg		30A	C1		12A	C1	
EEPM-3060B	300	590	30	25	30				32	10000	82kg		30A	C1		20A	C1	
EEPM-3080B	300	810	30	25	30				44	13700	116kg		25A	C2		13A	C2	
EEPM-3090B	300	870	30	25	30				48	15000	123kg		30A	C2		12A	C2	
EEPM-30100B	300	990	30	25	30				56	17500	138kg		35A	C2		19A	C2	
EEPM-4040B	420	430	30	25	-				36	11200	84kg		18A	C2		18A	C1	
EEPM-4050B	420	490	30	25	-				42	13100	95kg		26A	C2		14A	C2	
EEPM-4060B	420	590	30	25	30	M8	60	10	48	15000	100kg	AC 220V	30A	C2	AC 380V 440V	12A	C2	
EEPM-4080B	420	810	30	25	30				66	20600	159kg		30A	C2		19A	C2	
EEPM-4090B	420	870	30	25	30				72	22500	169kg		18A	C4		18A	C2	
EEPM-40100B	420	990	30	25	30				84	26200	193kg		26A	C4		12A	C4	
EEPM-5060B	480	590	30	25	30				56	17500	129kg		35A	C2		19A	C2	
EEPM-5080B	480	810	30	25	30				77	24000	185kg		30A	C4		13A	C4	
EEPM-5090B	480	870	30	25	30				84	26200	196kg		26A	C4		14A	C4	
EEPM-50100B	480	990	30	25	30				96	30600	219kg		30A	C4		12A	C4	
EEPM-6060B	600	590	30	25	30				72	22500	165kg		18A	C4		18A	C2	
EEPM-6080B	600	810	30	25	30				99	30900	215kg		30A	C4		19A	C4	
EEPM-6090B	600	870	30	25	30				108	33700	240kg		27A	C4		20A	C4	
EEPM-60100B	600	990	30	25	30				126	39300	274kg		32A	C4		21A	C4	
EEPM-8080B	755	810	30	25	30				121	37800	271kg		33A	C4		18A	C4	

Custom-made is available.