


# byko-spectra *lite*

For critical color evaluation the byko-spectra *lite* light booth offers the required options and features that is needed to evaluate and communicate color with absolute confidence.

- Comparison of standard and sample in a color-neutral environment
  - Five different controlled light sources:
 

Daylight	D65
Incandescent light	A
Department store light	CWF and TL84
Ultra-violet light	UV
- Viewing under ultraviolet light to detect and evaluate optical brighteners or fluorescent pigments
- Automatic light source sequencing to standardize testing procedures
- Timer to track the daylight source usage and to indicate when to replace the lamps
- Can be set up in minutes without any tools
- Comfortable testing in a compact design – for laboratory and production

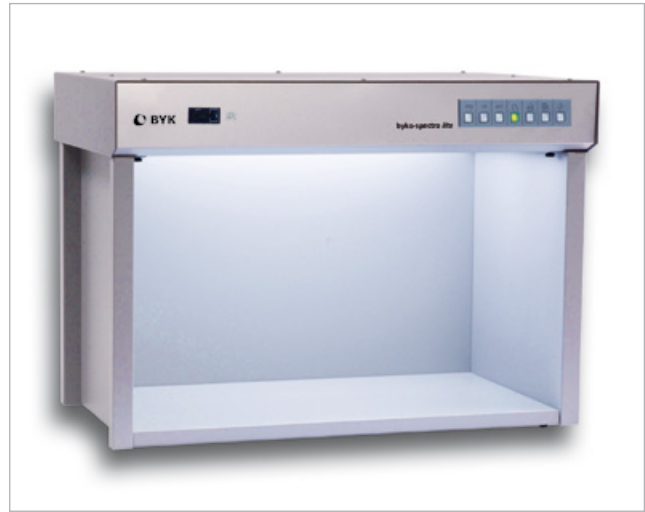

## Standards

ASTM	D 1729
ISO	3668 (accessory required)

**Certified**

Please refer to section Preventive Maintenance

## Ordering Information

Cat. No.	Description
6061	byko-spectra lite 230 V
6060	byko-spectra lite 115 V

### Comes complete with:

byko-spectra *lite*  
 5 light sources: D65, A, CWF, TL84, UV  
 Certificate  
 Operating instructions

## Technical Specifications

Voltage	D65	A	CWF	TL84	UV
230 V, 50/60 Hz	X	X	X	X	X
115 V, 50/60 Hz	X	X	X	X	X
<b>Dimensions</b>	49 x 67 x 48 cm (19.5 x 26 x 19 in)				
<b>Viewing Area</b>	36 x 61 x 41 cm (14 x 24 x 16 in)				
<b>Weight</b>	18 kg (39 lbs)				

## Ordering Information

Cat. No.	Description
6062	Lamp Kit for 6060/6061
6063	Lamp Kit, certified for 6060/6061
6064	ISO Panel Set for 6060/6061

## Accessories

Voltage	D65	A	CWF	TL84	UV
230 / 115 V	X	X	X	X	X
230 / 115 V	X	X	X	X	X

**Note:** We recommend to replace the lamps every 2500 hours.