


Step Gap Film Applicator

This applicator produces film thickness increasing step by step. Provides an easy comparison of opacity changes based on film thickness differences.

- 4 clearances with 4 steps each
- Film width is 25 mm per step

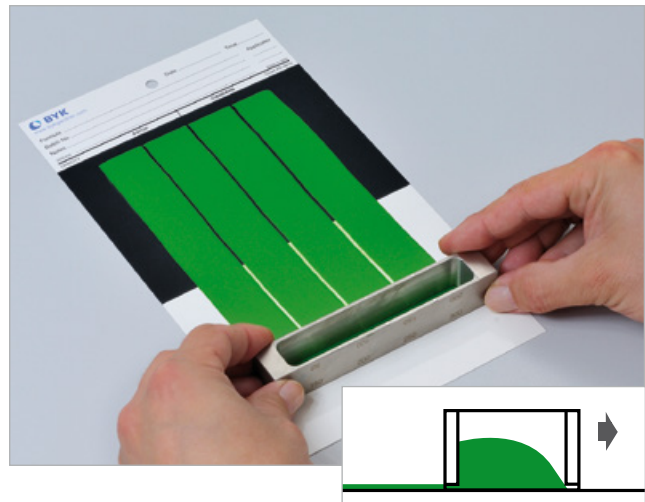

Ordering Information

Cat. No.	Description
2120	Step Gap Frame

Comes complete with:

Applicator Frame
Storage case

Technical Specifications


Gap Clearance (µm)	Film Width	Material
25 & 50 & 75 & 100 µm	4 x 25 mm	Stainless Steel
50 & 100 & 150 & 200 µm		
150 & 200 & 250 & 300 µm		
300 & 350 & 400 & 450 µm		

Dow Latex Film Applicator

A U-shaped film applicator designed to allow the application of a second coat of paint directly upon a hardened first coat while the ends of the applicator remain on the uncoated panel surface. The gap on one edge of the Dow Applicator has both greater clearance and width than the gap on the other edge.

Paint is applied within the channel formed by the "U" shape of the bar; as the bar is drawn down, the pool of paint is contained within the channel, yielding a consistent width.

- Allows two coats on a single substrate

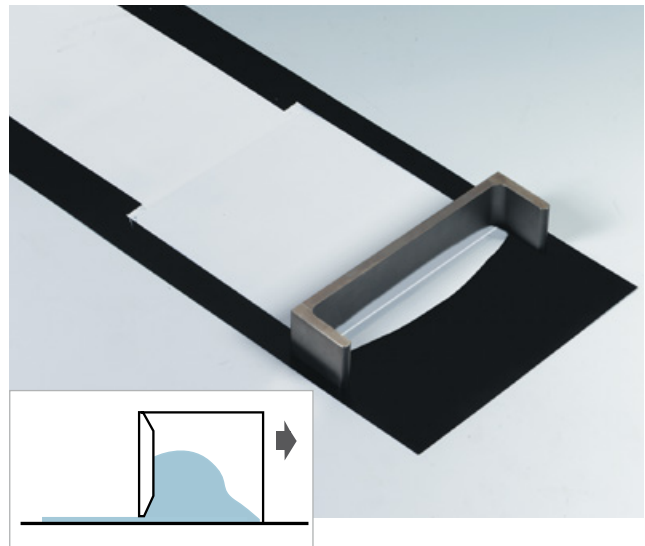

Standards

ASTM	D 823, D 2486, D 3258
Federal Spec.	TT-P

Ordering Information

Cat. No.	Description
2230	Dow Latex Applicator

Comes complete with:

Applicator
Storage case

Technical Specifications

Gap Clearance	Film Width	Material
175 and 250 µm (7 and 10 mil)	13.3 and 14 cm (5.25 and 5.5 in)	Stainless Steel