


High Speed Collet Chuck

高轉速高精度立銑刀本體

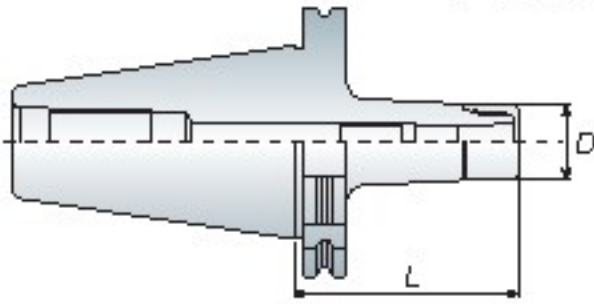

Model No.	Clamping Range	D	L	Weight (kg)
SK40 AVC06-090	2~6	27	90	1.30
AVC 10-090	3~10	33	90	1.40
AVC 12-090	3~12	40	90	1.50
SK50 AVC06-105	2~6	27	105	3.90
AVC 10-105	3~10	33	105	4.10
AVC 12-105	3~12	40	105	4.20

Unit: mm

AVC

SK
series
DIN 69871A



- AVC Long type collet with angle 8° increases clamping force, cutting rigidity and precision.
- Special nut design provides better cutting conditions and reducing cutting vibrations.
- Wrench must be ordered separately.
- Max Speed: 30,000 r.p.m G2.5
- 8° 長筒夾設計提升高夾持力，高剛性及高精度
- 刀桿柄壁的增厚設計大幅提升切削剛性
- 螺帽獨特設計可降低高轉速切削時的風阻及噪音並提升工作效能
- AVC 扳手為另購品
- 最高轉速可達 30,000 r.p.m G2.5




P21- AVC Collet

P21- AVC Nut

P21- Wrench

High Speed Collet Chuck

後拉式夾頭刀桿

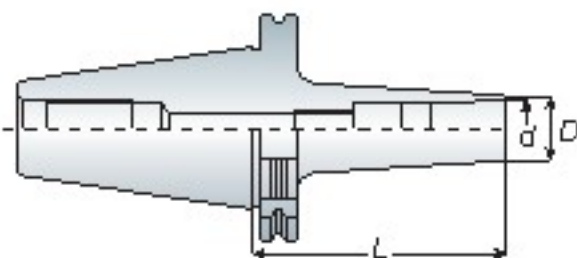

- ADS06, ADS08: 5mm Hex-Wrench
- ADS12, ADS16: 8mm Hex-Wrench
- ADS06, ADS08 使用 5mm 六角扳手
- ADS12, ADS16 使用 8mm 六角扳手

Model No.	Clamping Range (d)	D	L	Weight (kg)
SK30 ADS06-080	2~6	13	80	0.55
ADS08-080	3~8	16	80	0.60
ADS 12-085	3~12	23	85	0.65
SK40 ADS06-090	2~6	13	90	1.10
-120	2~6	13	120	1.30
-150	2~6	13	150	1.50
ADS08-090	3~8	16	90	1.20
-120	3~8	16	120	1.40
-150	3~8	16	150	1.60
ADS 12-090	3~12	23	90	1.30
-135	3~12	28	135	1.70
ADS 16-095	5~16	28	95	1.40
SK50 ADS08-100	3~8	16	100	3.20
ADS 12-100	3~12	23	100	3.40
ADS 16-100	5~16	28	100	3.30

Unit: mm

ADS



- ADS tool holder is suitable for high-speed and high precision cutting. Tool holder designed without nut could reduce cutting vibration.
- Wrench is attached for each ADS tool holder.
- Max Speed: 30,000 r.p.m G2.5
- ADS 刀桿適用於高速精密加工，無螺帽設計，降低加工時物件干涉
- 筒夾後拉式設計，操作簡易
- 每支 ADS 刀桿均附 1 支扳手
- 最高轉速可達 30,000 r.p.m G2.5



P23- ADS Collet