

Drill Chuck Holder

直截式鑽夾頭刀桿

APU


CAT

series



Model No.	Clamping Range		D		L				Weight (kg)
	mm	inch	mm	inch	Min.		Max.		
CAT40APU08	1~8	1/32"~5/16"	36.3	1.429"	65	2.559"	76.5	3.011"	1.40
APU13	1~13	1/32"~1/2"	51.5	2.028"	88	3.464"	99	3.897"	1.80
APU16	3~16	3/32"~5/8"	58	2.283"	106	4.173"	120	4.724"	2.40
CAT50APU08	1~8	1/32"~5/16"	36.3	1.429"	70	2.755"	77.5	3.051"	3.30
APU13	1~13	1/32"~1/2"	51.5	2.028"	89	3.503"	100	3.937"	3.80
APU16	3~16	3/32"~5/8"	58	2.283"	96	3.779"	110	4.330"	4.10

- The shank and keyless drill chuck are combined together so that to avoid the drill chuck slipping out for heavy-duty and high-speed cutting.
- Wrench is attached for each APU drill chuck holder.
- APU 刀桿和鑽夾頭結為一體，可避免鑽頭於高速及重切削時掉落或鬆脫
- 每支 APU 刀桿均附 1 支扳手

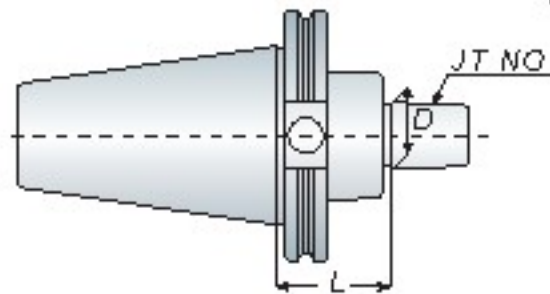

Drill Chuck Holder

鑽夾頭刀桿

JTA



Model No.	JT. No.	D	L	Weight (kg)
CAT40JTA1	JTA1	0.384"	1.375"	1.10
JTA2	JTA2	0.548"	1.375"	1.10
JTA6	JTA6	0.676"	1.375"	1.15
CAT50JTA1	JTA1	0.384"	1.375"	3.00
JTA2	JTA2	0.548"	1.375"	3.20
JTA6	JTA6	0.676"	1.375"	3.30

- Keyless drill mount must be ordered separately.
- 鑽夾頭為另購品

