


## Double Power Chuck

超倍力夾頭刀桿

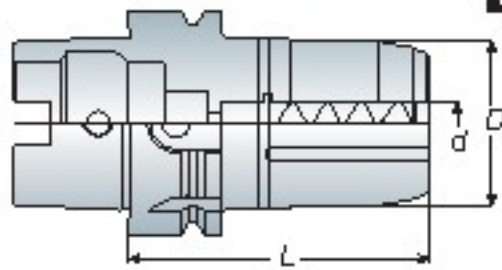

Model No.	d	D	L	Wrench	Weight (kg)
HSK63A.AMG12-085	12	46	85	WAMG12	1.30
AMG16-090	16	54	90	WAMG16	2.00
AMG20-110	20	58	110	WAMG20	2.30
AMG25-110	25	62	110	WAMG25	2.30
AMG32-115	32	70	115	WAMG32	2.40
HSK100A.AMG20-120	20	58	120	WAMG20	4.00
AMG25-120	25	62	120	WAMG25	4.00
AMG32-120	32	70	120	WAMG32	4.20


Unit: mm



- **AMG Double Power Chuck** with nut for C-WRENCH is available.
- Please change name from AMG to AMC of each model no. when ordering.
- 螺帽部分為 C 型系列，訂購時，請更改品名為 AMC
- Example: BT40 AMC 16-080

## High Speed Milling Chuck

高轉速強力銑刀夾頭刀桿

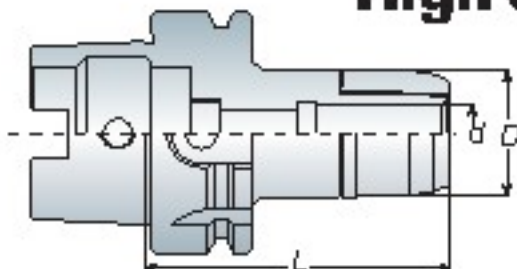

Model No.	Clamping Range	d	D	L	Collet Type	Weight (kg)
HSK50A.ASG12-075	3~12	12	35	75	SC12	0.80
ASG16-100	3~16	16	46	100	SC16	0.80
HSK63A.ASG12-075	3~12	12	35	75	SC12	1.10
-095/120	3~12	12	35	95/120	SC12	1.30/1.50
ASG16-080	3~16	16	46	80	SC16	1.30
-100	3~16	16	46	100	SC16	1.60
ASG20-095	4~20	20	54	95	SC20	1.90
ASG25-105	6~25	25	58	105	SC25	2.00
ASG32-115	6~32	32	68	115	SC32	2.10
HSK100A.ASG12-115/135	3~12	12	35	115/135	SC12	3.00/3.30
ASG16-115/135	3~16	16	46	115/135	SC16	3.00/3.30
ASG20-115/135/165	4~20	20	54	115/135/165	SC20	3.20/3.80/4.60
ASG25-115/135/165	6~25	25	58	115/135/165	SC25	3.40/4.00/4.80
ASG32-115/135/165	6~32	32	68	115/135/165	SC32	3.40/4.20/5.00

Unit: mm

# AMG

# HSK-A

series



- AMG tooling system is suitable for high speed and heavy cutting simultaneously.
- AMG tooling system is special designed for coolant type - JET THROUGH.
- High precision clamping because of the design of needle roller bearing.
- The spacer could make the flange & nut be tightened and provide exceptional rigidity.
- Wrench must be ordered separately.
- Max speed: 30,000 r.p.m G2.5
- AMG 刀桿系列可同時在高速切削及重切削上使用
- AMG 刀具系列為端面給油設計
- 刀桿採用針狀軸承設計，夾持度極佳
- 螺帽透過墊片與本體貼合使之提高剛性
- AMG 扳手為另購品
- 最高轉速可達 30,000 r.p.m G2.5



P6-Wrench

# ASG



- ASG tooling system is suitable for high speed and high precision cutting.
- When using without collet, ASG tooling system is designed for coolant type - THROUGH TOOLS.
- Wrench must be ordered separately.
- Max speed: 30,000 r.p.m G2.5
- ASG 刀具系列適用於高轉速、高精密切削加工，切削效果佳
- 在沒有搭配筒夾的情況下使用，ASG 刀具系列為刀尖給油設計
- ASG 扳手為另購品
- 最高轉速可達 30,000 r.p.m G2.5



P6-Wrench

P6-SC Collet



**HSK-A**  
series

**ASC**



- ASC tooling system is suitable for high speed and high precision cutting.
- When using without collet, ASC tooling system is designed for coolant type - THROUGH TOOLS.
- Dust-proof design could extend tool holder lifetime.
- C-type wrench is attached for each ASC milling chuck.
- Max speed: 30,000 r.p.m G2.5
- ASC 刀具系列用於高轉速、高精密切削加工，切削效果佳
- 在沒有搭配筒夾的情況下使用，ASC 刀具系列為刀尖給油設計
- 特殊防塵設計，提升刀桿壽命
- 每支 ASC 刀桿均附 1 支 C 型扳手
- 最高轉速可達 30,000 r.p.m G2.5



- C-type wrench is attached for each ASC milling chuck.
- Max speed: 30,000 r.p.m G2.5
- 每支 ASC 刀桿均附 1 支 C 型扳手
- 最高轉速可達 30,000 r.p.m G2.5




P6- Wrench

P6- SC Collet

## High Speed Milling Chuck

高轉速強力銑刀夾頭刀桿

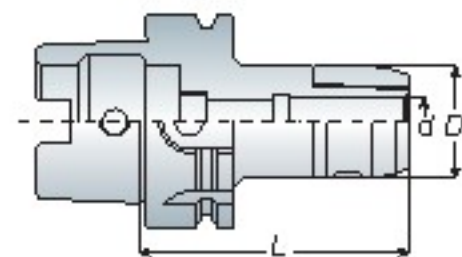


Model No.	Clamping Range	d	D	L	Collet Type	Weight (kg)
HSK50A.ASC16-100	3~16	16	46	100	SC16	0.80
HSK63A.ASC16-080	3~16	16	46	80	SC16	1.30
-100	3~16	16	46	100	SC16	1.70
ASC20-095	4~20	20	53	95	SC20	1.90
HSK100A.ASC16-115	3~16	16	46	115	SC16	2.90
-135	3~16	16	46	135	SC16	3.20
ASC20-115	4~20	20	53	115	SC20	3.20
-135	4~20	20	53	135	SC20	3.80
-165	4~20	20	53	165	SC20	4.60

Unit: mm

## Milling Chuck

強力銑刀夾頭刀桿

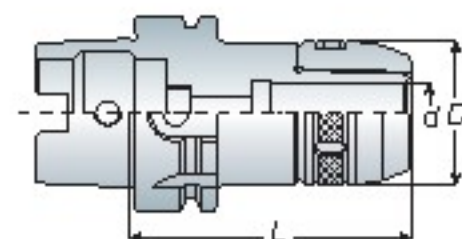

Model No.	Clamping Range	d	D	L	Collet Type	Weight (kg)
HSK63A.ASC25-105	6~25	25	58	105	SC25	2.00
ASC32-105	6~32	32	68	105	SC32	2.00
HSK100A.ASC25-115	6~25	25	64	115	SC25	3.40
-135	6~25	25	64	135	SC25	4.00
-165	6~25	25	64	165	SC25	4.80
ASC32-115	6~32	32	76	115	SC32	3.40
-135	6~32	32	76	135	SC32	4.20
-165	6~32	32	76	165	SC32	5.00

Unit: mm