


## ER Balanced Tool Holder

ER 彈性筒夾本體

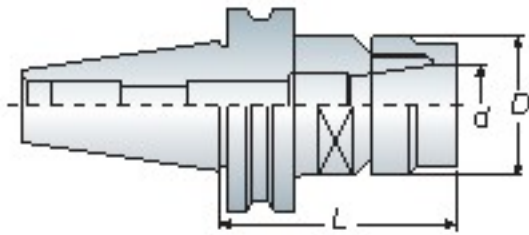

Model No.	Clamping Range(d)	D	L	Collet Type	Wrench	Weight (kg)
ISO20 ER16M-030	1~10	30	22	ER16	WM16	0.20
ISO25 ER20M-030	1~13	30	28	ER20	WM20	0.20
ISO25 DER20M-030	1~13	30	28	ER20	WM20	0.20
ISO30 ER16-055	1~10	55	28	ER16	WER16	0.60
ER20-060	1~13	60	34	ER20	WER20	0.60
ER25-060	2~16	60	42	ER25	WER25	0.70
ER32-060	2~20	60	50	ER32	WER32	0.70

Unit: mm

ISO

ISO/NBT  
series




P14- ER Nut

P11- ER Collet

P14- Wrench

## ASK Balanced Tool Holder

ASK 高轉速精密筒夾本體

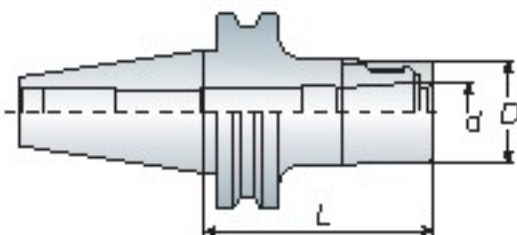

Model No.	Clamping Range (d)	D	L	Collet Type	Wrench	Weight (kg)
ISO25 ASK10-040	2~10	27	40	ASK10	WASK10	0.30
ISO25 DASK10-040	2~10	27	40	ASK10	WASK10	0.30
ISO30 ASK10-060	2~10	27	60	ASK10	WASK10	0.70
ASK16-060	3~16	40	60	ASK16	WASK16	0.80

Unit: mm



P17- SK Collet

P18- Wrench

P19- ASK Nut

- DER20M / DASK10 is for "DOUBLE CONTACT SYSTEM"
- For small CNC machine center and engraving machine.
- Wrench and collet must be ordered separately.
- Max speed: 30,000 r.p.m. G2.5
- DER20M / DASK10 適用於兩面拘束系統
- 適用於木工機及雕刻機
- 扳手和筒夾為另購品
- 最高轉速可達 30,000 r.p.m. G2.5