


BT / NT
series

AVC




- When ordering, please specify the collet grade with A or AA.
For example: AVC12-08 AA.
- The tolerance of the tool shank should be h7.
- 請於訂購時註明 A 級或 AA 級
例：AVC12-08 AA
- AVC 筒夾夾持刀具柄徑公差為 h7

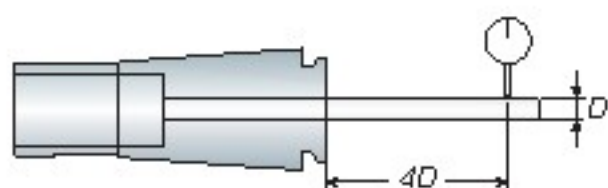

Collet

高精度立銑刀筒夾

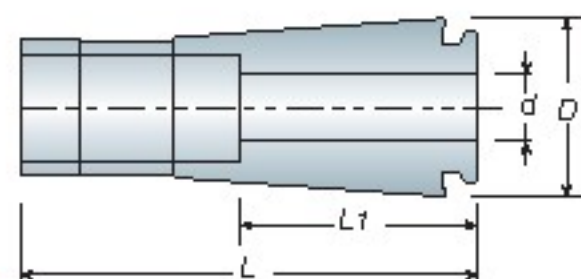


Model No.	d	D	L1	L	Weight (kg)
AVC06-02	2		14		
AVC06-03	3		16		
AVC06-04	4	14	18	40	0.02
AVC06-05	5		20		
AVC06-06	6		22		
AVC10-03	3		16		
AVC10-04	4		18		
AVC10-05	5	17	20	45.5	0.04
AVC10-06	6		22		
AVC10-08	8		28		
AVC10-10	10		30		
AVC12-03	3		16		
AVC12-04	4		18		
AVC12-05	5		20		
AVC12-06	6		22		
AVC12-07	7	21	25	54	0.06
AVC12-08	8		28		
AVC12-09	9		28		
AVC12-10	10		30		
AVC12-11	11		30		
AVC12-12	12		32		

Unit: mm

筒夾等級 Collet Grade	跳動精度 / Runout - Max μ 4 倍直徑前 - 4xD
A 級	$\cong 10\mu$
AA 級	$\cong 5\mu$

Bearing Wrench

軸承扳手

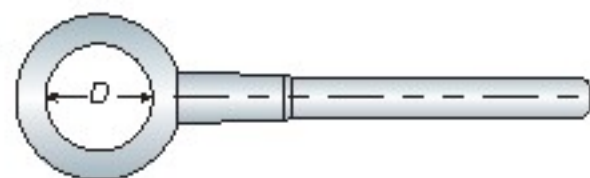


Model No.	D	Weight (kg)
WAVC06 (WASK10)	27	0.50
WAVC10 (WASK13)	33	0.65
WAVC12 (WASK16)	40	0.80

Unit: mm

Nut

螺帽



Model No.	D	L	G	Weight (kg)
WAVC06-NUT	27	22	M21.5x1.0P	0.05
WAVC10-NUT	33	20.5	M27x1.0P	0.08
WAVC12-NUT	40	28	M34x1.0P	0.10

Unit: mm

