

## Accessories



- To be used for fixing the tools on the tool holder.
- Horizontal or vertical locking device selection is for quick and simple operations.



FIG 1



FIG 2

- Made of plastic and wool.
- The spindle taper wiper can quick-clean machine spindle.

## Tool Locking Device

### 立臥兩用鎖刀座

Model No.	Taper Shank	Weight (kg)
BT30 鑽刀座 (BT30-100-000)	MAS403-BT	4.10
BT40 鑽刀座 (BT40-100-001)		4.20
BT50 鑽刀座 (BT50-100-003)		8.90
SK30 鑽刀座 (SK30-100-000)	SK-DIN69871A	4.10
SK40 鑽刀座 (SK40-100-001)		4.20
SK50 鑽刀座 (SK50-100-003)		8.90
CAT30 鑽刀座 (CAT30-100-000)	CAT	4.10
CAT40 鑽刀座 (CAT40-100-001)		4.20
CAT50 鑽刀座 (CAT50-100-003)		8.90

Unit: mm

## Spindle Taper Wipers


### 主軸清潔棒

Model No.	FIG.	Taper No.	Weight (kg)
CA-30	1	#30	0.15
CA-40		#40	0.15
CA-50		#50	0.25
CA-HSK40A+C	2	HSK40A+C	0.20
CA-HSK50A+C		HSK50A+C	0.20
CA-HSK63A+C		HSK63A+C	0.20
CA-HSK100A+C		HSK100A+C	0.75

Unit: mm

## CK 52PCS Clamping Kit

### 萬能夾具組

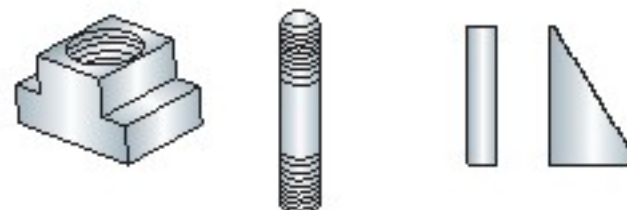

Model No.	T-slot	Stud Size	Step Block Width	Weight (kg)
CK-103A	7/16	3/8" -16	1" (STB14, STB24, STB34)*	7.00
CK-103B	1/2			7.00
CK-103C	9/16			7.00
CK-104A	9/16	1/2" -12 or 1/2" -13	1" or 1-1/4" (STB14, STB24, STB34) or (STB15, STB25, STB35)	10.50
CK-104B	5/8			10.50
CK-104C	9/16			10.50
CK-105A	11/16	5/8" -11	1" or 1-1/4" (STB14, STB24, STB34) or (STB15, STB25, STB35)	12.50
CK-105B	3/4			12.50
CK-105C	13/16			12.50
CK-08	10	M8x1.25P	1" (STB14, STB24, STB34)	7.30
CK-10	12	M10x1.50P	1" (STB14, STB24, STB34)	8.00
CK-12A	14	M12x1.75P	1" (STB14, STB24, STB34)	10.00
CK-12B	16			10.00
CK-12C	18			10.00
CK-14	16	M14x2.0P	1" (STB14, STB24, STB34)	11.50
CK-16	18	M16x2.0P	1" (STB14, STB24, STB34)	13.00
CK-18	20	M18x2.5P	1-1/2"	25.70
CK-20	22	M20x2.5P	1-1/2"	27.70

Unit: mm

- 適用於各型機械工作台面 T 型槽之規格，專為模具、治具板等固定使用

- 24pcs Stud. Each Size with 4 pcs:  
3", 4", 5", 6", 7", 8"
- 6pcs Table Slot (T-slot)
- 6pcs Flanged Nuts
- 4pcs Coupling Nuts
- 6pcs Step Clamps
- 6pcs Step Blocks
- 英制螺絲桿規格長度分別有  
3", 4", 5", 6", 7", 8" 各 4 支
- 6 個 T 型螺帽
- 6 個法蘭螺帽
- 4 個接頭螺帽
- 6 個齒型壓板
- 6 個齒型墊板