
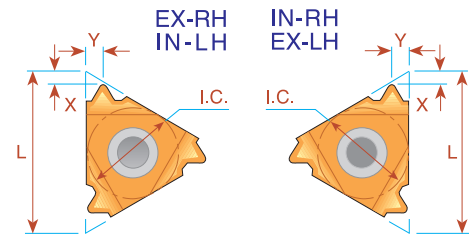




## OIL Threads API Round



Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y
10	16	3/8	0.75	<b>16 ER 10 API RD</b>	<b>16 IR 10 API RD</b>	1.5	1.4
8	16	3/8	0.75	<b>16 ER 8 API RD</b>	<b>16 IR 8 API RD</b>	1.3	1.6

Order example: 16 ER 10 API RD BMA

## Multitooth

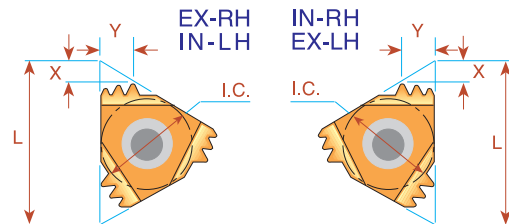



Pitch TPI	L	I.C. in	Number of Teeth	<b>EXTERNAL</b> Ordering Code	Anvil	<b>INTERNAL</b> Ordering Code	Anvil	X	Y
10	22	1/2	2	<b>22 ER 10API RD 2M</b>	AE22M	<b>22 IR 10API RD 2M</b>	AI22M	2.4	3.7
10	27	5/8	3	<b>27 ER 10API RD 3M</b>	AE27M	<b>27 IR 10API RD 3M</b>	AI27M	3.8	6.2
8	27	5/8	2	<b>27 ER 8 API RD 2M</b>	AE27M	<b>27 IR 8 API RD 2M</b>	AI27M	3.0	4.5

Order example: 27 IR 10 API RD 3M MXC

For recommended number of passes see page 57

## OIL Threads

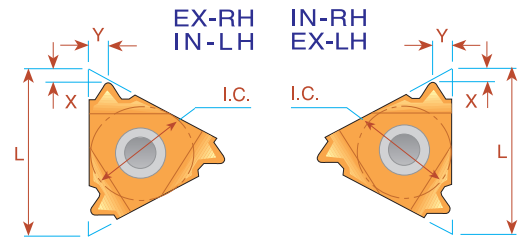

### V-0.040

Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
5	22	1/2	3	<b>22 ER 5 API 403</b>	<b>22 IR 5 API 403</b>	1.8	2.5	2 <sup>3</sup> / <sub>8</sub> -4 <sup>1</sup> / <sub>2</sub> REG


### V-0.038R

Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
4	27	5/8	2	<b>27 ER 4 API 382</b>	<b>27 IR 4 API 382</b>	2.1	2.8	NC23-NC50
4	27	5/8	3	<b>27 ER 4 API 383</b>	<b>27 IR 4 API 383</b>	2.1	2.8	NC56-NC77

### V-0.050


Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
4	27	5/8	2	<b>27 ER 4 API 502</b>	<b>27 IR 4 API 502</b>	2.0	3.0	6 <sup>5</sup> / <sub>8</sub> REG
4	27	5/8	3	<b>27 ER 4 API 503</b>	<b>27 IR 4 API 503</b>	2.0	3.0	5 <sup>1</sup> / <sub>2</sub> , 7 <sup>5</sup> / <sub>8</sub> , 8 <sup>5</sup> / <sub>8</sub> , REG

## OIL Threads Extreme - Line Casing



Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
6	22	1/2	1.50	<b>22 ER 6 EL 1.5</b>	<b>22 IR 6 EL 1.5</b>	1.9	1.9	5-7 <sup>5</sup> / <sub>8</sub>
5	22	1/2	1.25	<b>22 ER 5 EL 1.25</b>	<b>22 IR 5 EL 1.25</b>	2.4	2.3	8 <sup>5</sup> / <sub>8</sub> -10 <sup>3</sup> / <sub>4</sub>

## Buttress Casing



Pitch TPI	L	I.C. in	Taper IPF	<b>EXTERNAL</b> Ordering Code	<b>INTERNAL</b> Ordering Code	X	Y	Connection No. or Size
5	22	1/2	0.75	<b>22 ER 5 BUT 0.75</b>	<b>22 IR 5 BUT 0.75</b>	2.2	2.4	4 <sup>1</sup> / <sub>2</sub> -13 <sup>3</sup> / <sub>8</sub>
5	22	1/2	1.00	<b>22 ER 5 BUT 1.0</b>	<b>22 IR 5 BUT 1.0</b>	2.3	2.4	16-20

Order example: 22 ER 5 BUT 0.75 MXC