

ST-Rack Wall Mount Equipment Rack is a design for multi vendor equipment wall mounted rack. It come with depth of 400mm to 800mm. ST-Rack also provide two choices of the front outlook such as Perforated Type and Perspex Type. Easy lift off door hinge provide convenience and creating works space for high density 19" rack mount equipment.



- Rack framework
- Top cover with ventilation fan position for 2 fans (optional)
- One Front Perforated or Perspex Metal Door with Cam lock
- 2 Detachable side panels with lock
- 4 Universal adjustable panel mounting members
- Cable entry provided for the rear section
- · Power cable with plug top
- 20 sets of M6 caged nuts
- Epoxy high quality powder coated finishing (Black colour).
- · A wide range of accessories







Ventilation Fan



Sliding Tray



1U Cable Management Panel



Equipment Tray



Cantilever Tray



PVC Power Outlet





Ventilation Fan



Open View (Door With Perforated)





Panel Mounting Member




2 detachable side panel with Lock



STANDARDS

- •IEC 297-2
- •DIN 41494, Part 7
- •DIN 41491, Part 1 Mounting Dimension
- •EN 60950
- •VDE 0100
- •EIA-310-D
- •1U = 44.45mm
- Cam Lock
- M6 Caged Nuts
- Perspex Door / Perforated Door
- Panel Mounting Member

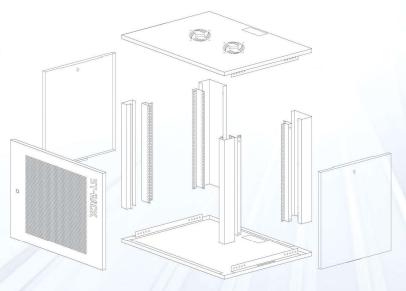

ACCESSORIES DETAIL

Wall Mount Rack (WM) Depth (mm) Width (mm) U 400 700 800 500 600 **4U** 600 ST-WM0464 ST-WM0465 ST-WM0466 ST-WM0467 ST-WM0468 **6U** 600 ST-WM0666 ST-WM0668 ST-WM0664 ST-WM0665 ST-WM0667 **9U** 600 ST-WM0966 ST-WM0968 ST-WM0964 ST-WM0965 ST-WM0967 12U 600 ST-WM1264 ST-WM1266 ST-WM1267 ST-WM1268 ST-WM1265 15U 600 ST-WM1564 ST-WM1566 ST-WM1567 ST-WM1565 ST-WM1568 18U 600 ST-WM1864 ST-WM1866 ST-WM1867 ST-WM1865 ST-WM1868 24U 600 ST-WM2464 ST-WM2466 ST-WM2467 ST-WM2468 ST-WM2465