

Category 6 UTP Cable


Digilink Category 6 UTP cable consists of 100-Ohm impedance, 4 pair UTP cables for horizontal installations in local area networks (LANs). All cables meet and exceed Category 6/Class E requirements in ANSI/TIA-568-C.2, and ISO/IEC 11801.

MECHANICAL SPECIFICATIONS

Outer Diameter	Nominal diameter 6.0mm 4 twisted pair
Conductor Type	23 AWG bare solid copper
Jacket Material	PVC, LSZH Jacket
Standard Colour	Grey

ELECTRICAL SPECIFICATIONS

Characteristic Impedance	100±6 Ω@ 1-300 Mhz
DC Resistance	72 Ω/km (max)
Voltage Rating	72 Vdc max
Dielectric Strength	1500 V/1 minute min rms
Insulation Resistance	500MΩ/km(min)@500 Vdc
Velocity of Propagation (NVP)	69%

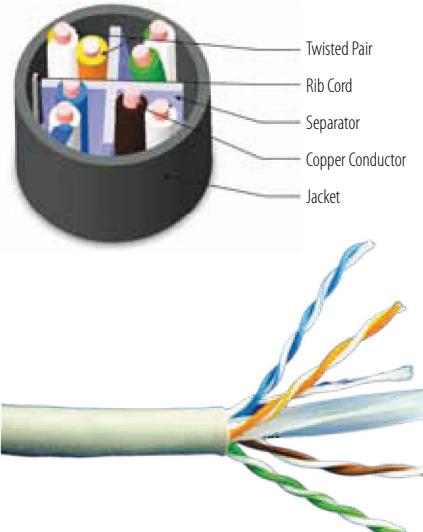

PRODUCT FEATURES

- Exceptional material properties and cable design
- High ACR values-providing low BER (Bit Error-Rate)
- Extremely high pair-balance-providing excellent EMC (Electromagnetic compatibility)
- Minimum radiations and maximum noise immunity
- Unique hologram sticker for authenticity
- UL94V-0 rated plastic
- RoHS Compliant
- UL/ETL Verified, UL listed
- ANSI/TIA-568-C.2 Category 6

PERFORMANCE CHARACTERISTICS ANSI/TIA-568-C.2 (HORIZONTAL CABLE)

Frequency (MHz)	Return Loss (dB)	Attenuation (dB/100m)	NEXT (dB)	ACR (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)	Delay (ns/100m)
1	20.0	2.0	74.3	72	72.3	67.8	64.8	570
4	23.0	3.8	65.3	61	63.3	55.8	52.8	552
8	24.5	5.3	60.8	55	58.8	49.7	46.7	547
10	25.0	6.0	59.3	53	57.3	47.8	44.8	545
16	25.0	7.6	56.2	49	54.2	43.7	40.7	543
20	25	8.5	54.8	46	52.8	41.8	38.8	542
25	24.3	9.5	53.3	44	51.3	39.8	36.8	541
31.25	23.6	10.7	51.9	41	49.9	37.9	34.9	540
62.5	21.5	15.4	47.4	32	45.4	31.9	28.9	539
100	20.1	19.8	44.3	25	42.3	27.8	24.8	538
150	18.9	24.7	41.7	16.9	39.7	24.3	21.3	537
200	18.0	29.0	39.8	10.8	37.8	21.8	18.8	537
250	17.3	32.8	38.3	5.5	36.3	19.8	16.8	536

NUMBER

DESCRIPTION

DC6CAUTP4P3X

Category 6, 4 Pair UTP Cable 305m

Note: This cable is used for low Voltage signal transmission used in IT industry