


Cavo Technology

WALL-MOUNT FIBER PATCH BOX (2 Door)

FEATURES:

- Adapter plate made of steel or aluminium materials
- Reliable device to strip, protect, fix and earth optical fiber
- Suitable for 6, 12 and 24 fiber connection
- Adopt separate structure to splicing, convenient to expansion and maintenance
- Double-door design for easy installation and maintenance
- Cable coiling drum can use by semicircle and patching circle
- Six pieces 35mm cable entry ports
- Splice tray made of molded plastic
- Stacked structure for easy operation
- The capacity of each splice tray is 12 fiber
- Flexible configuration, fix the plate with the button design
- Suitable for FC, SC, ST, LC Duplex(SC type), DIN (FC type)

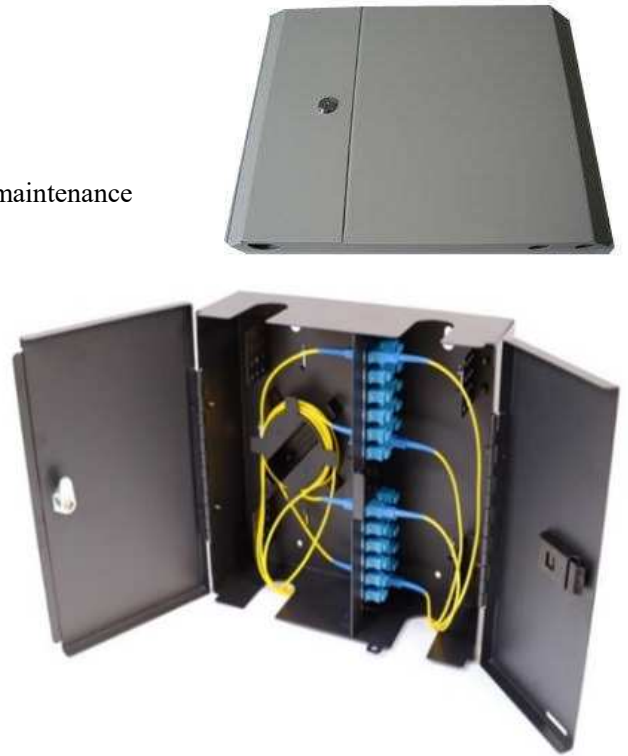

APPLICATION:

- Local Area Network (LAN)
- Optical Access Network (OAN)
- Data Processing Centers
- Cable Television (CATV)
- FTTH

SPECIFICATION

ITEM		CHARACTERISTICS	
Operation Temperature		-25°C~+40°C	
Storage Temperature		-25°C~+55°C	
Relative Humidity		≤85%(+30°C)	
Air Pressure		70Kpa~106Kpa	
Colour		Beige and Black	
PORT	DIMENSION(LxWxH)	CAPACITY	PRODUCT CODE
12 Port	400mm×380mm×80mm	12 fiber	084111011
24 Port	400mm×380mm×80mm	24 fiber	084111001

ACCESSORIES:

NO	NAME	QUANTITY
1	Heat Shrinkable Tube	-
2	Nylon Locking Tie Wraps	3 PCS
3	M6 Rack-Screw	4 PCS
4	Fix Cable Sticker	3 PCS

Notice: "-"the number is same to fiber cord number

Ordering Information

1. Connector Type: SC, LC, FC, ST
2. Ferrule End-face: PC, UPC, APC
3. Part Number: CV-WMDWWUU-YY WW=Connector Type YY= SM/MM UU=12/16/24 (Total Ports)